

# HYDRAULIC FILTRATION PRODUCTS

RETURN FILTERS



PASSION TO PERFORM








## A WORLDWIDE LEADER IN THE FIELD OF HYDRAULIC FILTRATION EQUIPMENT.

Our company started life in 1964, when Bruno Pasotto decided to attempt to cater for the requests of a market still to be fully explored, with the study, design, development, production and marketing of a vast range of filters for hydraulic equipment, capable of satisfying the needs of manufacturers in all sectors. The quality of our products, our extreme competitiveness compared with major international producers and our constant activities of research, design and development has made us a worldwide leader in the field of hydraulic circuit filtering. Present for 50 years in the market, we have played a truly decisive role in defining our sector, and by now we are a group capable of controlling our entire chain of production, monitoring all manufacturing processes to guarantee superior quality standards and to provide concrete solutions for the rapidly evolving needs of customers and the market.

## MARKET LEADER



Our work is based on a skillful interaction between advanced technology and fine workmanship, **customizing products according to specific market requests**, focusing strongly on innovation and quality, and following every step in the manufacturing of both standard and special products, fully respecting customer expectations.



Our customer-oriented philosophy, which enables us to satisfy all customer requests **rapidly and with personalized products**, makes us a **dynamic and flexible enterprise**. The possibility of constantly controlling and monitoring the entire production process is essential to allow us to guarantee the quality of our products.

## WORLDWIDE PRESENCE

Our foreign Branches enable us to offer a diversified range of products that allow us to successfully face the aggressive challenge of international competition, and also to maintain a stable presence at a local level.

The Group boasts **8 business branches**




## TECHNOLOGY

Our constant **quest for excellence in quality and technological innovation** allows us to offer only the best solutions and services for applications in many fields, including general industry, test rigs, lubrication, heavy engineering, renewable energies, naval engineering, offshore engineering, aviation systems, emerging technologies and mobile plant (i.e. tractors, excavators, concrete pumps, platforms).



## AND PRODUCTION

Our high level of technological expertise means **we can rely entirely on our own resources, without resorting to external providers.** This in turn enables us to satisfy a growing number of customer requests, also exploiting our constantly updated range of machines and equipment, featuring **fully-automated workstations** capable of **24-hour production.**

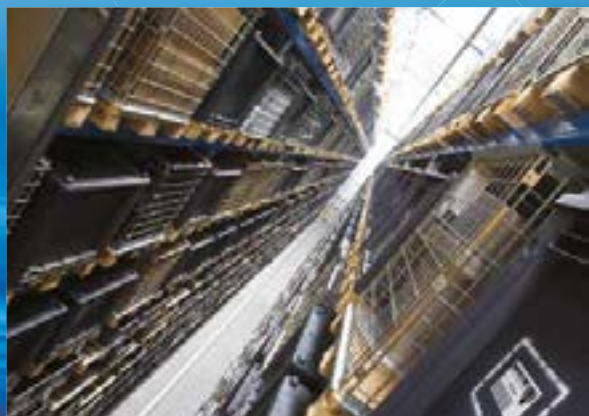



### SUCTION FILTERS

Flow rates up to 875 l/min

- Mounting:
- Tank immersed
  - In-Line
  - In tank with shut off valve
  - In tank with flooded suction

### RETURN FILTERS

Flow rates up to 3000 l/min

- Pressure up to 20 bar
- Mounting:
- In-Line
  - Tank top
  - In single and duplex designs

### RETURN / SUCTION FILTERS

Flow rates up to 300 l/min

- Pressure up to 80 bar
- Mounting:
- In-Line
  - Tank top

### SPIN-ON FILTERS

Flow rates up to 365 l/min

- Pressure up to 35 bar
- Mounting:
- In-Line
  - Tank top

### LOW & MEDIUM PRESSURE FILTERS

Flow rates up to 3000 l/min

- Pressure up to 80 bar
- Mounting:
- In-Line
  - Parallel manifold version
  - In single and duplex designs

### HIGH PRESSURE FILTERS

Flow rates up to 750 l/min

- Pressure from 110 bar up to 560 bar
- Mounting:
- In-Line
  - Manifold
  - In single and duplex designs



## PRODUCT RANGE

MP Filtri can offer a vast and articulated range of products for the global market, suitable for all industrial sectors using hydraulic equipment.

This includes filters (suction, in-line, pressure, stainless steel, spin-on and return) and structural components (motor/pump bell housings, transmission couplings, flexible inserts, damper rings, support feet, aluminium tanks, inspection hatches).

We can provide all the skills and solutions required by the modern hydraulics industry to monitor contamination levels and other fluid conditions.

Mobile filtration units and a full range of accessories allow us to supply everything necessary for complete hydraulic circuits.



### STAINLESS STEEL HIGH PRESSURE FILTERS

Flow rates up to 125 l/min  
Pressure from 320 bar  
up to 1000 bar

Mounting:

- In-Line
- Manifold
- In single and duplex designs

### CONTAMINATION MONITORING PRODUCTS

- Calibrated on test rigs manufactured and certified to ISO 11943 based on methods from ISO 11171
- Off-line and In-line particles counting up to 400 bar
- Bottle samplers
- RS 232 - RS 485 digital bus interfaces

### MOBILE FILTRATION UNITS

Flow rates from 15 l/min  
up to 200 l/min

### POWER TRANSMISSION PRODUCTS

- Aluminium bell-housings for motors from 0.12 kW to 400 kW
- Couplings in Aluminium Cast Iron - Steel
- Damping rings
- Foot bracket
- Aluminium tanks
- Cleaning covers

### ACCESSORIES

- Oil filler and air breather plugs
- Optical and electrical level gauges
- Pressure gauge valve selectors
- Pipe fixing brackets
- Pressure gauges

# HYDRAULIC FILTRATION PRODUCTS

<b>1</b>	<b>page</b>	<b>INTRODUCTION</b>
1		COMPANY
6		PRODUCT RANGE
11		CONTAMINATION MANAGEMENT
20		FILTER SIZING
20		CORRECTIVE FACTOR

<b>24</b>	<b>page</b>	<b>SUCTION FILTERS</b>	<b>up to Q<sub>max</sub></b>	
			<b>l/min</b>	<b>gpm</b>
27	STR - MPA - MPM	Submerged suction filter, with bypass or magnetic column	875	231
35	SF2 250 - 350	Semi-submerged positive head suction filter	160	43
43	SF2 500	Semi-submerged positive head suction filter	800	211
53	CLOGGING INDICATORS			

<b>56</b>	<b>page</b>	<b>RETURN FILTERS</b>	<b>up to P<sub>max</sub></b>		<b>up to Q<sub>max</sub></b>	
			<b>bar</b>	<b>psi</b>	<b>l/min</b>	<b>gpm</b>
59	MPFX	Tank top semi-immersed filter, standard filter element disassembly	8	116	750	198
87	MPTX	Tank top semi-immersed filter, easy filter element disassembly	8	116	300	80
105	MFBX	Bowl assembly fully immersed filter			500	132
111	MPF	Tank top semi-immersed filter, standard filter element disassembly	8	116	750	198
139	MPT	Tank top semi-immersed filter, easy filter element disassembly	8	116	300	80
157	MFB	Bowl assembly fully immersed filter			500	132
163	MPH - MPI	Tank top semi-immersed filter with internal / external oil flow	10	145	3000	792
193	FRI	Tank top semi-immersed filter, easy filter element disassembly, it can be used also as in-line filter	20	290	1500	397
207	RF2	Semi-immersed under-head filter, easy filter element disassembly	20	290	350	92
214	CLOGGING INDICATORS					
224	ACCESSORIES					

<b>226</b>	<b>page</b>	<b>RETURN / SUCTION FILTERS</b>	<b>up to P<sub>max</sub></b>		<b>up to Q<sub>max</sub></b>	
			<b>bar</b>	<b>psi</b>	<b>l/min</b>	<b>gpm</b>
229	MRSX	Unique TANK TOP filter for mobile machinery, with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed circuit.	10	145	300	80
239	LMP 124 MULTIPORT	Unique IN-LINE filter for mobile machinery, with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed circuit.	80	1160	200	52
245	CLOGGING INDICATORS					

<b>258</b>	<b>page</b>	<b>SPIN-ON FILTERS</b>	<b>up to P<sub>max</sub></b>		<b>up to Q<sub>max</sub></b>	
			<b>bar</b>	<b>psi</b>	<b>l/min</b>	<b>gpm</b>
261	MPS	Low pressure filter, available with single cartridge for in-line or flange mounting or with two cartridge on the same axis on the opposite sides	12	300	365	96
277	MSH	In-line low and medium pressure filter available with single cartridge	35	508	195	52
285	MST	Low pressure tank mounted filter	12	300	195	52
291	CLOGGING INDICATORS					

302 page	LOW & MEDIUM PRESSURE FILTERS	up to P <sub>max</sub>		up to Q <sub>max</sub>		
		bar	psi	l/min	gpm	
305	LMP MULTIPORT 110 - 120 - 123	In-line filter with Multiport design for multiple choice connection	80	1160	200	53
321	LMP 210 - 211	In-line low & medium pressure filter	60	870	330	87
331	LMP 400 - 401 - 430 - 431	In-line low & medium pressure filter	60	870	740	195
343	LMP 900 - 901	In-line low pressure filter, filter elements designed according to DIN 24550	30	435	2000	528
351	LMP 902 - 903	In-line filter specifically designed to be mounted in series, filter elements designed according to DIN 24550	20	290	3000	792
359	LMP 950 - 951	In-line modular filter, available with 2 and up to 6 different heads	30-25	435-362	2400	634
367	LMP 952 - 953 - 954	In-line low pressure filter specifically designed to be mounted in series	25	362	3000	792
379	LMD 211	In-line duplex medium pressure filter	60	870	330	88
387	LMD 400 - 401 - 431	In-line duplex low pressure filter	16	232	590	156
401	LMD 951	In-line duplex modular filter, available with 2 up to 6 different heads	16-25	232-362	1200	315
409	LDP - LDD	In-line and duplex medium pressure filter, filter elements designed according to DIN 24550	60	870	330	88
418	CLOGGING INDICATORS					

424 page	HIGH PRESSURE FILTERS	up to P <sub>max</sub>		up to Q <sub>max</sub>		
		bar	psi	l/min	gpm	
427	FMP 039	Versatile filter for high pressure - low flow rate applications	110	1595	80	21
435	FMP	Versatile filter for high pressure - high flow rate applications	320	4641	475	125
445	FHP	Typical high pressure filter for mobile applications	420	6091	750	198
459	FMM 050	FMM 050: Typical high pressure filter for mobile applications	420	6091	150	40
	FHA 051	FHA 051: Filter optimized for use in high pressure operating systems	560	8122	140	37
467	FHM	High pressure filter with intermediate plate construction	320	4641	450	119
483	FHB	High pressure for block mounting	320	4641	485	128
495	FHF 325	In-line manifold top mounting	350	5076	500	133
505	FHD	In-line duplex high pressure filter	350	5076	345	92
516	CLOGGING INDICATORS					

522 page	STAINLESS STEEL HIGH PRESSURE FILTERS	up to P <sub>max</sub>		up to Q <sub>max</sub>		
		bar	psi	l/min	gpm	
525	FZP	In-line pressure filter with threaded mount	420	6091	150	40
535	FZH	In-line pressure filter with threaded mount for higher pressure	700	10152	50	13
543	FZX	In-line pressure filter with threaded mount up to 1000 bar	1000	14504	10	2.6
551	FZB	Manifold side mounting	320	4641	75	20
559	FZM	Manifold top mounting	320	4641	70	18
567	FZD	Duplex pressure filter for continuous operation requirements	350	5076	90	24
577	CLOGGING INDICATORS					

580 page	CLOGGING INDICATORS
585	QUICK REFERENCE GUIDE



# Contamination management

**INDEX**

	Page
① HYDRAULIC FLUIDS	12
② FLUIDS CONTAMINATION	12
③ EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS	12
④ MEASURING THE SOLID CONTAMINATION LEVEL	13
⑤ FILTRATION TECHNOLOGIES	16
⑥ RECOMMENDED CONTAMINATION CLASSES & FILTER TYPES	17
⑦ FILTER SIZING PARAMETERS	18
⑧ APPLICABLE STANDARDS FOR FILTER DEVELOPMENT	18

## ① HYDRAULIC FLUIDS

The fluid is the vector that transmits power, energy within an oleodynamic circuit. In addition to transmitting energy through the circuit, it also performs additional functions such as lubrication, protection and cooling of the surfaces.

The classification of fluids used in hydraulic systems is coded in many regulatory references, different Standards.

The most popular classification criterion divides them into the following families:

- MINERAL OILS

Commonly used oil deriving fluids.

- FIRE RESISTANT FLUIDS

Fluids with intrinsic characteristics of incombustibility or high flash point.

- SYNTHETIC FLUIDS

Modified chemical products to obtain specific optimized features.

- ECOLOGICAL FLUIDS

Synthetic or vegetable origin fluids with high biodegradability characteristics.

The choice of fluid for an hydraulic system must take into account several parameters.

These parameters can adversely affect the performance of an hydraulic system, causing delay in the controls, pump cavitation, excessive absorption, excessive temperature rise, efficiency reduction, increased drainage, wear, jam/block or air intake in the plant.

The main properties that characterize hydraulic fluids and affect their choice are:

- DYNAMIC VISCOSITY

It identifies the fluid's resistance to sliding due to the impact of the particles forming it.

- CINEMATIC VISCOSITY

It is a widespread formal dimension in the hydraulic field.

It is calculated with the ratio between the dynamic viscosity and the fluid density.

Cinematic viscosity varies with temperature and pressure variations.

- VISCOSITY INDEX

This value expresses the ability of a fluid to maintain viscosity when the temperature changes.

A high viscosity index indicates the fluid's ability to limit viscosity variations by varying the temperature.

- FILTERABILITY INDEX

It is the value that indicates the ability of a fluid to cross the filter materials. A low filterability index could cause premature clogging of the filter material.

- WORKING TEMPERATURE

Working temperature affects the fundamental characteristics of the fluid. As already seen, some fluid characteristics, such as cinematic viscosity, vary with the temperature variation.

When choosing a hydraulic oil, must therefore be taken into account of the environmental conditions in which the machine will operate.

- COMPRESSIBILITY MODULE

Every fluid subjected to a pressure contracts, increasing its density.

The compressibility module identifies the increase in pressure required to cause a corresponding increase in density.

- HYDROLYTIC STABILITY

It is the characteristic that prevents galvanic pairs that can cause wear in the plant/system.

- ANTIOXIDANT STABILITY AND WEAR PROTECTION

These features translate into the capacity of a hydraulic oil to avoid corrosion of metal elements inside the system.

- HEAT TRANSFER CAPACITY

It is the characteristic that indicates the capacity of hydraulic oil to exchange heat with the surfaces and then cool them.

## ② FLUID CONTAMINATION

Whatever the nature and properties of fluids, they are inevitably subject to contamination. Fluid contamination can have two origins:

- INITIAL CONTAMINATION

Caused by the introduction of contaminated fluid into the circuit, or by incorrect storage, transport or transfer operations.

- PROGRESSIVE CONTAMINATION

Caused by factors related to the operation of the system, such as metal surface wear, sealing wear, oxidation or degradation of the fluid, the introduction of contaminants during maintenance, corrosion due to chemical or electrochemical action between fluid and components, cavitation. The contamination of hydraulic systems can be of different nature:

- SOLID CONTAMINATION

For example rust, slag, metal particles, fibers, rubber particles, paint particles or additives

- LIQUID CONTAMINATION

For example, the presence of water due to condensation or external infiltration or acids

- GASEOUS CONTAMINATION

For example, the presence of air due to inadequate oil level in the tank, drainage in suction ducts, incorrect sizing of tubes or tanks.

## ③ EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS

Solid contamination is recognized as the main cause of malfunction, failure and early degradation in hydraulic systems. It is impossible to delete it completely, but it can be effectively controlled by appropriate devices.

CONTAMINATION IN PRESENCE OF LARGE TOLERANCES



CONTAMINATION IN PRESENCE OF NARROW TOLERANCES




Solid contamination mainly causes surface damage and component wear.

- ABRASION OF SURFACES

Cause of leakage through mechanical seals, reduction of system performance, failures.

- SURFACE EROSION  
Cause of leakage through mechanical seals, reduction of system performance, variation in adjustment of control components, failures.
- ADHESION OF MOVING PARTS  
Cause of failure due to lack of lubrication.
- DAMAGES DUE TO FATIGUE  
Cause of breakdowns and components breakdown stem performance, failures.
- SURFACE EROSION  
Cause of leakage through mechanical seals, reduction of system performance, variation in adjustment of control components, failures.
- ADHESION OF MOVING PARTS  
Cause of failure due to lack of lubrication.
- DAMAGES DUE TO FATIGUE  
Cause of breakdowns and components breakdown.

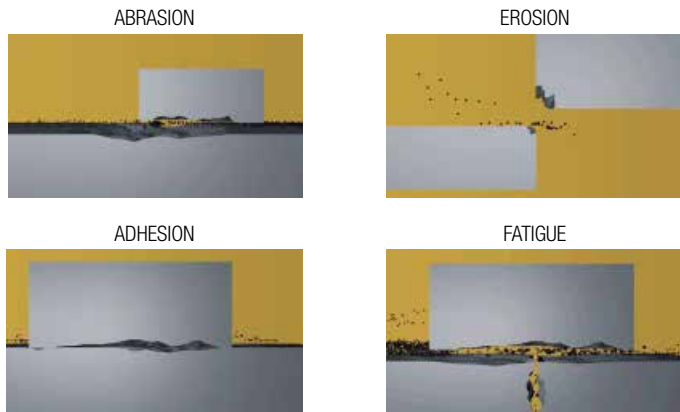

Liquid contamination mainly results in decay of lubrication performance and protection of fluid surfaces.

## DISSOLVED WATER

- INCREASING FLUID ACIDITY  
Cause of surface corrosion and premature fluid oxidation
- GALVANIC COUPLE AT HIGH TEMPERATURES  
Cause of corrosion

## FREE WATER - ADDITIONAL EFFECTS

- DECAY OF LUBRICANT PERFORMANCE  
Cause of rust and sludge formation, metal corrosion and increased solid contamination
- BATTERY COLONY CREATION  
Cause of worsening in the filterability feature
- ICE CREATION AT LOW TEMPERATURES  
Cause damage to the surface
- ADDITIVE DEPLETION  
Free water retains polar additives

Gaseous contamination mainly results in decay of system performance.

- CUSHION SUSPENSION  
Cause of increased noise and cavitation.
- FLUID OXIDATION  
Cause of corrosion acceleration of metal parts.
- MODIFICATION OF FLUID PROPERTIES (COMPRESSIBILITY MODULE, DENSITY, VISCOSITY)  
Cause of system's reduction of efficiency and of controllability. It is easy to understand how a system without proper contamination management is subject to higher costs than a system that is provided.
- MAINTENANCE  
Maintenance activities, spare parts, machine stop costs
- ENERGY AND EFFICIENCY  
Efficiency and performance reduction due to friction, drainage, cavitation.

## 4 MEASURING THE SOLID CONTAMINATION LEVEL

The level of contamination of a system identifies the amount of contaminant contained in a fluid.


This parameter refers to a unit volume of fluid.

The level of contamination may be different at different points in the system. From the information in the previous paragraphs it is also apparent that the level of contamination is heavily influenced by the working conditions of the system, by its working years and by the environmental conditions.


What is the size of the contaminating particles that we must handle in our hydraulic circuit?



HUMAN HAIR  
(75 μm)



MINIMUM DIMENSION  
VISIBLE HUMAN EYES  
(40 μm)



TYPICAL CONTAMINANT  
DIMENSION IN A  
HYDRAULIC CIRCUIT  
(4 ÷ 14 μm)

Contamination level analysis is significant only if performed with a uniform and repeatable method, conducted with standard test methods and suitably calibrated equipment.


To this end, ISO has issued a set of standards that allow to conduct tests and express the measured values in the following ways.

# CONTAMINATION MANAGEMENT

## - GRAVIMETRIC LEVEL - ISO 4405

The level of contamination is defined by checking the weight of particles collected by a laboratory membrane. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard.

The volume of fluid is filtered through the membrane by using a suitable suction system. The weight of the contaminant is determined by checking the weight of the membrane before and after the fluid filtration.

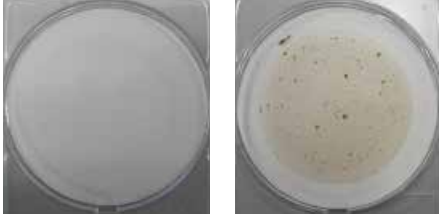

## - CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4406

The level of contamination is defined by counting the number of particles of certain dimensions per unit of volume of fluid. Measurement is performed by Automatic Particle Counters (APC).

Following the count, the contamination classes are determined, corresponding to the number of particles detected in the unit of fluid.

The most common classification methods follow ISO 4406 and SAE AS 4059 (Aerospace Sector) regulations.

NAS 1638 is still used although obsolete.

### Classification example according to ISO 4406

The code refers to the number of particles of the same size or greater than 4, 6 or 14  $\mu\text{m}$  in a 1 ml fluid.

Class	Number of particles per ml	
	Over	Up to
28	1 300 000	2 500 000
27	640 000	1 300 000
26	320 000	640 000
25	160 000	320 000
24	80 000	160 000
23	40 000	80 000
22	20 000	40 000
21	10 000	20 000
20	5 000	10 000
19	2 500	5 000
18	1 300	2 500
17	640	1 300
16	320	640
15	160	320
14	80	160
13	40	80
12	20	40
11	10	20
10	5	10
9	2.5	5
8	1.3	2.5
7	0.64	1.3
6	0.32	0.64
5	0.16	0.32
4	0.08	0.16
3	0.04	0.08
2	0.02	0.04
1	0.01	0.02
0	0	0.01

> 4  $\mu\text{m}_{(c)}$  = 350 particles

> 6  $\mu\text{m}_{(c)}$  = 100 particles


> 14  $\mu\text{m}_{(c)}$  = 25 particles

16 / 14 / 12

## ISO 4406:1999 Cleanliness Code System

Microscope counting examines the particles differently to APCs and the code is given with two scale numbers only.

These are at 5  $\mu\text{m}$  and 15  $\mu\text{m}$  equivalent to the 6  $\mu\text{m}_{(c)}$  and 14  $\mu\text{m}_{(c)}$  of APCs.

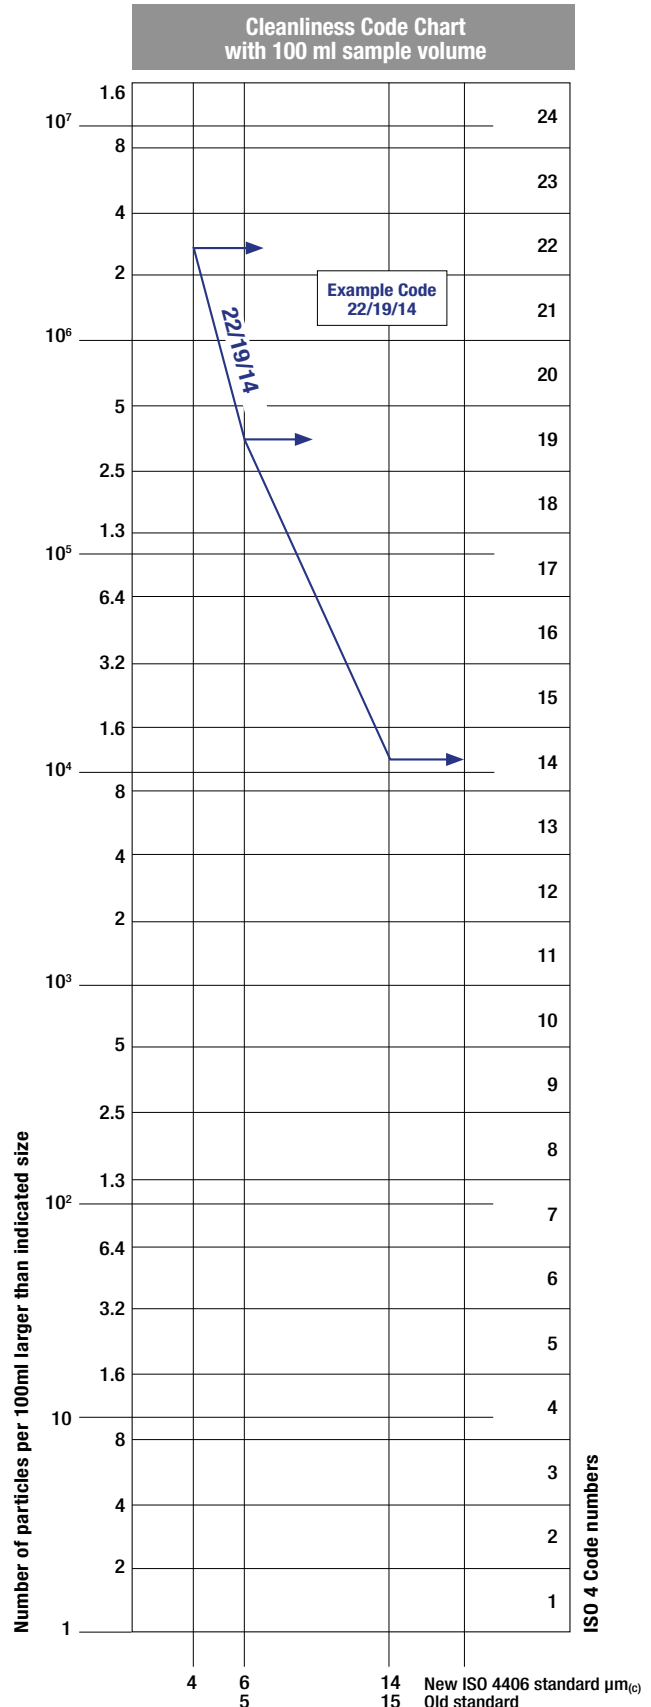



- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - SAE AS 4059-1 and SAE AS 4059-2

### Classification example according to SAE AS 4059-1 and SAE AS 4059-2

The code, prepared for the aerospace industry, is based on the size, quantity, and particle spacing in a 100 ml fluid sample. The contamination classes are defined by numeric codes, the size of the contaminant is identified by letters (A-F).

It can be made a differential measurement (Table 1) or a cumulative measurement (Table 2)

Table 1 - Class for differential measurement

Class	Dimension of contaminant				
	6÷14 µm <sub>(c)</sub>	14÷21 µm <sub>(c)</sub>	21÷38 µm <sub>(c)</sub>	38÷70 µm <sub>(c)</sub>	>70 µm <sub>(c)</sub>
00	125	22	4	1	0
0	250	44	8	2	0
1	500	89	16	3	1
2	1 000	178	32	6	1
3	2 000	356	63	11	2
4	4 000	712	126	22	4
5	8 000	1 425	253	45	8
6	16 000	2 850	506	90	16
7	32 000	5 700	1 012	180	32
8	64 000	11 400	2 025	360	64
9	128 000	22 800	4 050	720	128
10	256 000	45 600	8 100	1 440	256
11	512 000	91 200	16 200	2 880	512
12	1 024 000	182 400	32 400	5 760	1 024

6÷14 µm <sub>(c)</sub> = 15 000 particles
14÷21 µm <sub>(c)</sub> = 2 200 particles
21÷38 µm <sub>(c)</sub> = 200 particles
38÷70 µm <sub>(c)</sub> = 35 particles
> 70 µm <sub>(c)</sub> = 3 particles
Class 6

Table 2 - Class for cumulative measurement

Class	Dimension of contaminant					
	>4 µm <sub>(c)</sub> A	>6 µm <sub>(c)</sub> B	>14 µm <sub>(c)</sub> C	>21 µm <sub>(c)</sub> D	>38 µm <sub>(c)</sub> E	>70 µm <sub>(c)</sub> F
000	195	76	14	3	1	0
00	390	152	27	5	1	0
0	780	304	54	10	2	0
1	1 560	609	109	20	4	1
2	3 120	1 217	217	39	7	1
3	6 250	2 432	432	76	13	2
4	12 500	4 864	864	152	26	4
5	25 000	9 731	1 731	306	53	8
6	50 000	19 462	3 462	612	106	16
7	100 000	38 924	6 924	1 224	212	32
8	200 000	77 849	13 849	2 449	424	64
9	400 000	155 698	27 698	4 898	848	128
10	800 000	311 396	55 396	9 796	1 696	256
11	1 600 000	622 792	110 792	19 592	3 392	512
12	3 200 000	1 245 584	221 584	39 184	6 784	1 024

> 4 µm <sub>(c)</sub> = 45 000 particles
> 6 µm <sub>(c)</sub> = 15 000 particles
> 14 µm <sub>(c)</sub> = 1 500 particles
> 21 µm <sub>(c)</sub> = 250 particles
> 38 µm <sub>(c)</sub> = 15 particles
> 70 µm <sub>(c)</sub> = 3 particle
Class from 2F to 4E

- CLASSES OF CONTAMINATION ACCORDING TO NAS 1638 (January 1964)

The NAS system was originally developed in 1964 to define contamination classes for the contamination contained within aircraft components.

The application of this standard was extended to industrial hydraulic systems simply because nothing else existed at the time.

The coding system defines the maximum numbers permitted of 100ml volume at various size intervals (differential counts) rather than using cumulative counts as in ISO 4406:1999. Although there is no guidance given in the standard on how to quote the levels, most industrial users quote a single code which is the highest recorded in all sizes and this convention is used on MP Filtri APC's.

The contamination classes are defined by a number (from 00 to 12) which indicates the maximum number of particles per 100 ml, counted on a differential basis, in a given size bracket.

Size Range Classes (in microns)

Class	Maximum Contamination Limits per 100 ml				
	5÷15	15÷25	25÷50	50÷100	>100
00	125	22	4	1	0
0	250	44	8	2	0
1	500	89	16	3	1
2	1 000	178	32	6	1
3	2 000	356	63	11	2
4	4 000	712	126	22	4
5	8 000	1 425	253	45	8
6	16 000	2 850	506	90	16
7	32 000	5 700	1 012	180	32
8	64 000	11 400	2 025	360	64
9	128 000	22 800	4 050	720	128
10	256 000	45 600	8 100	1 440	256
11	512 000	91 200	16 200	2 880	512
12	1 024 000	182 400	32 400	5 760	1 024

5÷15 µm <sub>(c)</sub> = 42 000 particles
15÷25 µm <sub>(c)</sub> = 2 200 particles
25÷50 µm <sub>(c)</sub> = 150 particles
50÷100 µm <sub>(c)</sub> = 18 particles
> 100 µm <sub>(c)</sub> = 3 particles
Class NAS 8

- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4407

The level of contamination is defined by counting the number of particles collected by a laboratory membrane per unit of fluid volume. The measurement is done by a microscope.

The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard. The fluid volume is filtered through the membrane, using a suitable suction system.

The level of contamination is identified by dividing the membrane into a predefined number of areas and by counting the contaminant particles using a suitable laboratory microscope.

MICROSCOPE CONTROL AND MEASUREMENT



COMPARISON PHOTOGRAPH'S

1 graduation = 10µm




ISO 4406:1999	Class 16/14/11	Class 22/20/17
SAE AS4059E Table 1	Class 5	Class 11
NAS 1638	Class 5	Class 11
SAE AS4059E Table 2	Class 6A/5B/5C	Class 12A/11B/11C

## - CLEANLINESS CODE COMPARISON

Although ISO 4406:1999 standard is being used extensively within the hydraulics industry other standards are occasionally required and a comparison may be requested. The table below gives a very general comparison but often no direct comparison is possible due to the different classes and sizes involved.

ISO 4406:1999	SAE AS4059 Table 2	SAE AS4059 Table 1	NAS 1638
> 4 $\mu\text{m}_{(c)}$ 6 $\mu\text{m}_{(c)}$ 14 $\mu\text{m}_{(c)}$	> 4 $\mu\text{m}_{(c)}$ 6 $\mu\text{m}_{(c)}$ 14 $\mu\text{m}_{(c)}$	4-6 6-14 14-21 21-38 38-70 >70	5-15 15-25 25-50 50-100 >100
23 / 21 / 18	13A / 12B / 12C	12	12
22 / 20 / 17	12A / 11B / 11C	11	11
21 / 19 / 16	11A / 10B / 10C	10	10
20 / 18 / 15	10A / 9B / 9B	9	9
19 / 17 / 14	9A / 8B / 8C	8	8
18 / 16 / 13	8A / 7B / 7C	7	7
17 / 15 / 12	7A / 6B / 6C	6	6
16 / 14 / 11	6A / 5B / 5C	5	5
15 / 13 / 10	5A / 4B / 4C	4	4
14 / 12 / 09	4A / 3B / 3C	3	3

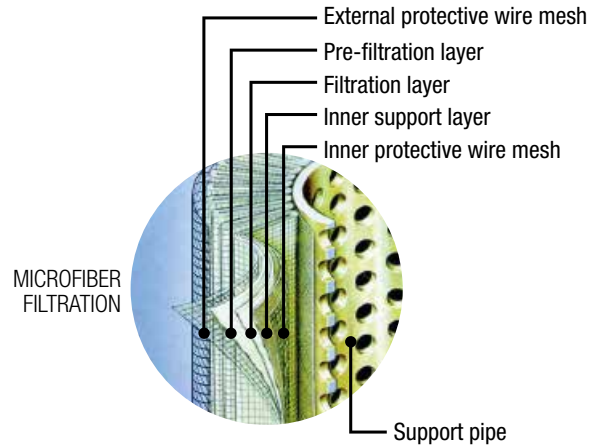

The filtration efficiency of metallic mesh filtrations is defined as the maximum particle size that can pass through the meshes of the filtering grid. The efficiency of microfibre and paper filtration ( $\beta_{x(c)}$ ) is defined through a lab test called Multipass Test. The efficiency value ( $\beta_{x(c)}$ ) is defined as the ratio between the number of particles of certain dimensions detected upstream and downstream of the filter.

$$\frac{\text{Upstream particles number} > X \mu\text{m}_{(c)}}{\text{Downstream particles number} > X \mu\text{m}_{(c)}} = \beta_{x(c)}$$

## 5 FILTRATION TECHNOLOGIES

Various mechanisms such as mechanical stoppage, magnetism, gravimetric deposit, or centrifugal separation can be used to reduce the level of contamination.

The mechanical stoppage method is most effective and can take place in two ways:

### - SURFACE FILTRATION

It is by direct interception. The filter prevents particles larger than the pores from continuing in the plant / system. Surface filters are generally manufactured with metal canvases or meshes.

### - DEPTH FILTERING

Filters are constructed by fiber interlacing. Such wraps form pathways of different shapes and sizes in which the particles remain trapped when they find smaller apertures than their diameter.

Depth filters are generally produced with papers impregnated with phenolic resins, metal fibers or inorganic fibers.

In inorganic fiber filtration, commonly called microfibre, the filtering layers are often overlapped in order to increase the ability to retain the contaminant.




Value ( $\beta_{x(c)}$ )	2	10	75	100	200	1000
Efficiency	50%	90%	98.7%	99%	99.5%	99.9%

Test conditions, such as type of fluid to be used (MIL-H-5606), type of contaminant to be used (ISO MTD), fluid viscosity, test temperature, are determined by ISO 16889.

In addition to the filtration efficiency value during the Multipass test, other important features, such as filtration stability ( $\beta$  stability) and dirt holding capacity (DHC), are also tested.

Poor filtration stability is the cause of the filtering quality worsening as the filter life rises. Low dirt holding capacity causes a reduction in the life of the filter.

WIRE MESH FILTRATION



PAPER FILTRATION



Filtration ISO Standard Comparison

MP Filtri Filter media code	$\beta_{x(c)} > 1000$ ISO 16889
A03	5 $\mu\text{m}_{(c)}$
A06	7 $\mu\text{m}_{(c)}$
A10	10 $\mu\text{m}_{(c)}$
A16	15 $\mu\text{m}_{(c)}$
A25	21 $\mu\text{m}_{(c)}$

## 6 RECOMMENDED CONTAMINATION CLASSES

Any are the nature and the properties of fluids, they are inevitably subject to contamination. The level of contamination can be managed by using special components called filters.

Hydraulic components builders, knowing the problem of contamination, recommend the filtration level appropriate to the use of their products.

Example of recommended contamination levels

Piston pumps with fixed flow rate	•					
Piston pumps with variable flow rate			•			
Vane pumps with fixed flow rate		•				
Vane pumps with variable flow			•			
Engines	•					
Hydraulic cylinders	•					
Actuators					•	
Test benches						•
Check valve	•					
Directional valves	•					
Flow regulating valves	•					
Proportional valves				•		
Servo-valves					•	
Flat bearings			•			
Ball bearings				•		
ISO 4406 CODE	20/18/15	19/17/14	18/16/13	17/15/12	16/14/11	15/13/10
Recommended filtration $\beta_{x(c)} \geq 1.000$	$\beta_{20(c)} > 1000$	$\beta_{15(c)} > 1000$	$\beta_{10(c)} > 1000$	$\beta_{7(c)} > 1000$	$\beta_{7(c)} > 1000$	$\beta_{5(c)} > 1000$

The common classification of filters is determined by their position in the plant.

### Types of filters:

#### Suction filters

They are positioned before the pump and are responsible for protecting the pump from dirty contaminants. It also provides additional flow guidance to the pump suction line.

Being subject to negligible working pressures are manufactured with simple and lightweight construction.

They are mainly produced with gross grade surface filtrations, mainly 60 ÷ 125 µm. They can be equipped with a magnetic filter for retaining ferrous particles.

They are generally placed under the fluid head to take advantage of the piezometric thrust of the fluid and reduce the risk of cavitation.

There are two types of suction filters:

#### - IMMERSION FILTERS

Simple filter element screwed on the suction pipe

#### - FILTERS WITH CONTAINER

Container filters that are more bulky, but provide easier maintenance of the tank

#### Delivery (or Pressure) filters

They are positioned between the pump and most sensitive regulating and controlling components, such as servo valves or proportional valves, and are designed to ensure the class of contamination required by the components used in the circuit.

Being subjected to high working pressures are manufactured with more robust and articulated construction. In particular situations of corrosive environments or aggressive fluids can be made of stainless steel.

They are mainly produced with filtering depths of 3 ÷ 25 µm.

They can be manufactured with in-line connections, with plate or flange connections or directly integrated into the circuit control blocks / manifolds. They can also be manufactured in duplex configuration to allow the contaminated section to be maintained even when the plant / system is in operation without interruption of the working cycle.

#### Return filters

They are positioned on the return line to the tank and perform the task of filtering the fluid from particles entering the system from the outside or generated by the wear of the components.

They are generally fixed to the reservoir (for this reason also called top tank mounted), positioned semi-immersed or completely immersed.

They are mainly produced with filtration depths of 10 ÷ 25 µm.

The positioning of the return filters must guarantee in all operating conditions that the fluid drainage takes place in immersed condition; this is to avoid creating foams in the tank that can cause malfunctions or cavitation in the pumps.

For the sizing of the return filters, account must be taken of the presence of accumulators or cylinders that can make the return flow considerably greater than the pump suction flow rate.

Being subject to contained working pressures are manufactured with simple and lightweight construction.

Normally it is possible to extract the filter element without disconnecting the filter from the rest of the system.

#### Combined filters

They are designed to be applied to systems with two or more circuits. They are commonly used in hydrostatic transmission machines where they have a dual filtration function of the return line and suction line of the hydrostatic transmission pump.

The filter is equipped with a valve that keeps the 0.5 bar pressure inside the filter. A portion of the fluid that returns to the tank is filtered by the return filter element, generally produced with absolute filtration, and returns to the transmission booster pump.

Only excess fluid returns to the tank through the valve.

The internal pressure of the filter and the absolute filtration help to avoid the cavitation phenomenon inside the pump.

#### Off-line filters

They are generally used in very large systems / plants, placed in a closed circuit independent from the main circuit. They remain in operation regardless of the operation of the main circuit and are crossed by a constant flow rate.

They can also be manufactured in duplex configuration to allow the contaminated section to be maintained even when the unit is in operation without interruption of the work cycle.

#### Venting filters

During the operation of the plants, the fluid level present in the reservoir changes continuously.

The result of this continuous fluctuation is an exchange of air with the outside environment.

The venting filter function, positioned on the tank, is to filter the air that enters the tank to compensate for fluid level variations.

## 7 FILTER CHOICE PARAMETERS

The choice of the filter system for an hydraulic system is influenced by several factors.

It is necessary to consider the characteristics of the various components present in the plant and their sensitivity to contamination.

It is also necessary to consider all the tasks that the filter will have to do within the plant:

- FLUID PROTECTION FROM CONTAMINATION
- PROTECTION OF OLEODYNAMIC COMPONENTS SENSITIVE TO CONTAMINATION
- PROTECTION OF OLEODYNAMIC PLANTS FROM ENVIRONMENTAL WASTE
- PROTECTION OF OLEODYNAMIC PLANTS FROM CONTAMINATION CAUSED BY COMPONENTS' FAILURES

The advantages of proper positioning and sizing of the filters are

- MORE RELIABILITY OF THE SYSTEM
- LONGER LIFE OF THE FLUID COMPONENTS
- REDUCTION OF STOP TIME
- REDUCTION OF FAILURE CASUALTIES

Each hydraulic filter is described by general features that identify the possibility of use in different applications.

- **MAXIMUM WORKING PRESSURE ( $P_{max}$ )**

The maximum working pressure of the filter must be greater than or equal to the pressure of the circuit section in which it will be installed.

- **PRESSURE DROP ( $\Delta P$ )**

The pressure drop depends on a number of factors, such as the working circuit temperature, the fluid viscosity, the filter element cleaning condition.

- **WORKING TEMPERATURE ( $T$ )**

The working temperature deeply affect the choice of materials. Excessively high or low temperatures may adversely affect the strength of the materials or the characteristics of the seals.

- **FILTRATION EFFICIENCY (%) / FILTRATION RATIO ( $\beta_{x(c)}$ )**

Filtration efficiency is the most important parameter to consider when selecting a filter.

When choosing the filtration performances, the needs of the most sensitive components in the system must be considered.

- **FLUID TYPE**

The type of fluid influences the choice of filters in terms of compatibility and viscosity. It is always mandatory to check the filterability.

- **PLACEMENT IN THE PLANT**

The position of the filter in the system conditions the efficiency of all filter performances.

## 8 APPLICABLE STANDARDS FOR FILTER DEVELOPMENT

In order to obtain unique criteria for development and verification of the filters performance, specific regulations for the filters and filter elements testing have been issued by ISO. These norms describe the target, the methodology, the conditions and the presentation methods for the test results.

### ISO 2941

*Hydraulic fluid power -- Filter elements -- Verification of collapse/burst pressure rating*

This Standard describes the method for testing the collapse / burst resistance of the filter elements.

The test is performed by crossing the contaminated fluid filter element at a predefined flow rate. The progressive clogging of the filter element, determined by contamination, causes an increase in differential pressure.

### ISO 2942

*Hydraulic fluid power -- Filter elements -- Verification of fabrication integrity and determination of the first bubble point*

This Standard describes the method to verify the integrity of the assembled filter elements.

It can be used to verify the quality of the production process or the quality of the materials by verifying the pressure value of the first bubble point.

### ISO 2943

*Hydraulic fluid power -- Filter elements -- Verification of material compatibility with fluids*

This Standard describes the method to verify the compatibility of materials with certain hydraulic fluids.

The test is carried out by keeping the element (the material sample) immersed in the fluid under high or low temperature conditions for a given period of time and verifying the retention of the characteristics.

### ISO 3723

*Hydraulic fluid power -- Filter elements -- Method for end load test*

This Standard describes the method for verifying the axial load resistance of the filter elements.

After performing the procedure described in ISO 2943, the designed axial load is applied to the filter element. To verify the test results, then the test described in ISO 2941 is performed.

### ISO 3968

*Hydraulic fluid power -- Filters -- Evaluation of differential pressure versus flow characteristics*

This Standard describes the method for checking the pressure drop across the filter.

The test is carried out by crossing the filter from a given fluid and by detecting upstream and downstream pressures.

Some of the parameters defined by the Standard are the fluid, the test temperature, the size of the tubes, the position of the pressure detection points.

### ISO 16889

*Hydraulic fluid power -- Filters -- Multi-pass method for evaluating filtration performance of a filter element*

This Standard describes the method to check the filtration characteristics of the filter elements.

The test is performed by constant introduction of contaminant (ISO MTD). The characteristics observed during the test are the filtration efficiency and the dirty holding capacity related to the differential pressure.

## **ISO 23181**

*Hydraulic fluid power -- Filter elements -- Determination of resistance to flow fatigue using high viscosity fluid*

This Standard describes the method for testing the fatigue resistance of the filter elements.

The test is carried out by subjecting the filter to continuous flow variations, thus differential pressure, using a high viscosity fluid.

## **ISO 11170**

*Hydraulic fluid power -- Sequence of tests for verifying performance characteristics of filter elements*

The Standard describes the method for testing the performance of filter elements. The protocol described by the regulations provides the sequence of all the tests described above in order to verify all the working characteristics (mechanical, hydraulic and filtration).

## **ISO 10771-1**

*Hydraulic fluid power -- Fatigue pressure testing of metal pressure-containing envelopes -- Test method*

This Standard describes the method to check the resistance of the hydraulic components with pulsing pressure.

It can be applied to all metal components (excluding tubes) subject to cyclic pressure used in the hydraulic field.

The correct filter sizing have to be based on the variable pressure drop depending by the application. For example, for the return filter the pressure drop have to be in the range 0.4 - 0.6 bar.

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop in the housing is proportional to the fluid density (kg/dm<sup>3</sup>); all the graphs in the catalogue are referred to mineral oil with density of 0.86 kg/dm<sup>3</sup>.

The filter element pressure drop is proportional to its viscosity (mm<sup>2</sup>/s), the corrective factor Y is related to an oil viscosity different than 30 mm<sup>2</sup>/s.

### Sizing data for single cartridge, head at top

$\Delta p_c$  = Filter housing pressure drop [bar]

$\Delta p_e$  = Filter element pressure drop [bar]

Y = Multiplication factor Y (see correspondent table), depending on the filter element size, on the filter element lenght and on the filter media

Q = flow rate (l/min)

V1 reference viscosity = 30 mm<sup>2</sup>/s (cSt)

V2 = operating viscosity in mm<sup>2</sup>/s (cSt)

$\Delta p_e = Y : 1000 \times Q \times (V2/V1)$

$\Delta p_{Tot.} = \Delta p_c + \Delta p_e$

### Calculation examples with HLP Mineral oil Variation in viscosity

Application data:

Top tank return filter

Filter with in-line connections

Pressure Pmax = 10 bar

Flow rate Q = 120 l/min

Viscosity V2 = 46 mm<sup>2</sup>/s (cSt)

Oil viscosity = 0.86 kg/dm<sup>3</sup>

Required filtration efficiency = 25 µm with absolute filtration

With bypass valve and 1 1/4" inlet connection

From the working pressure and the flow rate we understand it should be possible using the following top tank return filter series: MPT, MPH and FRI. Let's proceed with MPT series.


The size 20 doesn't achieve the required flow rate, therefore we have to consider the size 100. The final version of size 100 (101, 104, 110, 120 and 114) will be then defined in function of the mounting characteristics.

$\Delta p_c = 0.03 \text{ bar}$  (★ see graphic below, considering size 100 with the max available lenght to get the lowest pressure drop)

$\Delta p_e = (2.0 : 1000) \times 120 \times (46/30) = 0.37 \text{ bar}$

$\Delta p_{Tot.} = 0.03 + 0.37 = 0.4 \text{ bar}$

The selection is correct because the total pressure drop value is inside the admissible range for top tank return filters. It is of course possible trying to find a different solution, according to the mounting position or to other commercial need, repeating the previous steps while using a different series or lenght.

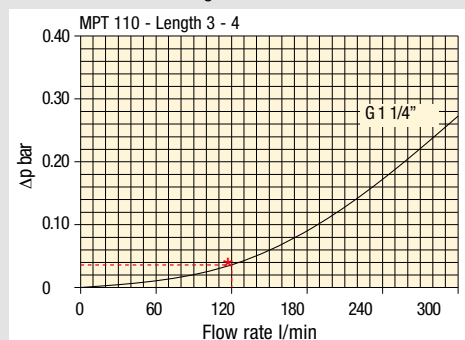

### Filter housings $\Delta p$ pressure drop.

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

**Corrective factor Y, to be used for the filter element pressure drop calculation. The values depend to the filter size and lenght and to the filter media.**

Reference viscosity 30 mm<sup>2</sup>/s

### Return filters

Filter element	Absolute filtration H Series					Nominal filtration N Series			
	Type	A03	A06	A10	A16	A25	P10	P25	M25 M60 M90
MF 020	1	74.00	50.08	20.00	16.00	9.00	6.43	5.51	4.40
	2	29.20	24.12	8.00	7.22	5.00	3.33	2.85	2.00
	3	22.00	19.00	6.56	5.33	4.33	1.68	1.44	1.30
MF 030 MFX 030	1	74.00	50.08	20.00	16.00	9.00	6.43	5.51	3.40
MF 100 MFX 100	1	28.20	24.40	8.67	8.17	6.88	4.62	3.96	1.25
	2	17.33	12.50	6.86	5.70	4.00	3.05	2.47	1.10
	3	10.25	9.00	3.65	3.33	2.50	1.63	1.32	0.96
	4	6.10	5.40	2.30	2.20	2.00	1.19	0.96	0.82
MF 180 MFX 180	1	3.67	3.05	1.64	1.56	1.24	1.18	1.06	0.26
	2	1.69	1.37	0.68	0.54	0.51	0.43	0.39	0.12
MF 190 MFX 190	2	1.69	1.37	0.60	0.49	0.44	0.35	0.31	0.11
MF 400 MFX 400	1	3.20	2.75	1.39	1.33	1.06	0.96	0.87	0.22
	2	2.00	1.87	0.88	0.85	0.55	0.49	0.45	0.13
	3	1.90	1.60	0.63	0.51	0.49	0.39	0.35	0.11
MF 750 MFX 750	1	1.08	0.84	0.49	0.36	0.26	0.21	0.19	0.06
CU 025		78.00	48.00	28.00	24.00	9.33	9.33	8.51	1.25
CU 040		25.88	20.88	10.44	10.00	3.78	3.78	3.30	1.25
CU 100		15.20	14.53	5.14	4.95	2.00	2.00	0.17	1.10
CU 250		3.25	2.55	1.55	1.35	0.71	0.71	0.59	0.25
CU 630		1.96	1.68	0.85	0.72	0.42	0.42	0.36	0.09
CU 850		1.06	0.84	0.42	0.33	0.17	0.17	0.13	0.04
MR 100	1	19.00	17.00	6.90	6.30	4.60	2.94	2.52	1.60
	2	11.70	10.80	4.40	4.30	3.00	2.94	2.52	1.37
	3	7.80	6.87	3.70	3.10	2.70	2.14	1.84	1.34
	4	5.50	4.97	2.60	2.40	2.18	1.72	1.47	1.34
	5	4.20	3.84	2.36	2.15	1.90	1.60	1.37	1.34
MR 250	1	5.35	4.85	2.32	1.92	1.50	1.38	1.20	0.15
	2	4.00	3.28	1.44	1.10	1.07	0.96	0.83	0.13
	3	2.60	2.20	1.08	1.00	0.86	0.77	0.64	0.12
	4	1.84	1.56	0.68	0.56	0.44	0.37	0.23	0.11
MR 630	1	3.10	2.48	1.32	1.14	0.92	0.83	0.73	0.09
	2	2.06	1.92	0.82	0.76	0.38	0.33	0.27	0.08
	3	1.48	1.30	0.60	0.56	0.26	0.22	0.17	0.08
	4	1.30	1.20	0.48	0.40	0.25	0.21	0.16	0.08
	5	0.74	0.65	0.30	0.28	0.13	0.10	0.08	0.04
MR 850	1	0.60	0.43	0.34	0.25	0.13	0.12	0.09	0.03
	2	0.37	0.26	0.23	0.21	0.11	0.08	0.07	0.03
	3	0.27	0.18	0.17	0.17	0.05	0.04	0.04	0.02
	4	0.23	0.16	0.13	0.12	0.04	0.03	0.03	0.02

**Corrective factor Y, to be used for the filter element pressure drop calculation.**  
**The values depend to the filter size and lenght and to the filter media.**

Reference viscosity 30 mm<sup>2</sup>/s

## Suction filters

Filter element	Nominal filtration N Series	
	P10	P25
<b>SF 250</b>	65	21

## Return / Suction filters

Filter element	Absolute filtration			
	A10	A16	A25	
<b>RSX 116</b>	1	5.12	4.33	3.85
	2	2.22	1.87	1.22
<b>RSX 165</b>	1	2.06	1.75	1.46
	2	1.24	1.05	0.96
	3	0.94	0.86	0.61

## Low & Medium pressure filters

Filter element	Type	Absolute filtration N-W Series					Nominal filtration N Series		
		A03	A06	A10	A16	A25	P10	P25	M25
<b>CU 110</b>	1	16.25	15.16	8.75	8.14	5.87	2.86	2.65	0.14
	2	12.62	10.44	6.11	6.02	4.15	1.60	1.49	0.12
	3	8.57	7.95	5.07	4.07	2.40	1.24	1.15	0.11
	4	5.76	4.05	2.80	2.36	1.14	0.91	0.85	0.05
<b>CU 210</b>	1	5.30	4.80	2.00	1.66	1.32	0.56	0.43	0.12
	2	3.44	2.95	1.24	1.09	0.70	0.42	0.35	0.09
	3	2.40	1.70	0.94	0.84	0.54	0.33	0.23	0.05
<b>DN</b>	016	7.95	7.20	3.00	2.49	1.98	0.84	0.65	0.18
	025	5.00	4.53	1.89	1.57	1.25	0.53	0.41	0.11
	040	3.13	2.66	1.12	0.98	0.63	0.38	0.32	0.08
<b>CU 400</b>	2	3.13	2.55	1.46	1.22	0.78	0.75	0.64	0.19
	3	2.15	1.70	0.94	0.78	0.50	0.40	0.34	0.10
	4	1.60	1.28	0.71	0.61	0.40	0.34	0.27	0.08
	5	1.00	0.83	0.47	0.34	0.20	0.24	0.19	0.06
	6	0.82	0.58	0.30	0.27	0.17	0.22	0.18	0.05
	<b>CU 900</b>	1	0.86	0.63	0.32	0.30	0.21	-	-
<b>CU 950</b>	2	1.03	0.80	0.59	0.40	0.26	-	-	0.05
	3	0.44	0.40	0.27	0.18	0.15	-	-	0.02
<b>MR 630</b>	7	0.88	0.78	0.36	0.34	0.16	0.12	0.96	0.47

# FILTER SIZING Corrective factor

Corrective factor **Y**, to be used for the filter element pressure drop calculation.  
The values depend to the filter size and lenght and to the filter media.

Reference viscosity 30 mm<sup>2</sup>/s

## High pressure filters

Filter element	Absolute filtration N - R Series					Nominal filtration N Series	
	Type	A03	A06	A10	A16		A25
HP 011	1	332.71	250.07	184.32	152.36	128.36	-
	2	220.28	165.56	74.08	59.13	37.05	-
	3	123.24	92.68	41.48	33.08	20.72	-
	4	77.76	58.52	28.37	22.67	16.17	-
HP 039	1	70.66	53.20	25.77	20.57	14.67	4.90
	2	36.57	32.28	18.00	13.38	8.00	2.90
	3	26.57	23.27	12.46	8.80	5.58	2.20
HP 050	1	31.75	30.30	13.16	12.3	7.29	1.60
	2	24.25	21.26	11.70	9.09	4.90	1.40
	3	17.37	16.25	8.90	7.18	3.63	1.25
	4	12.12	10.75	6.10	5.75	3.08	1.07
	5	7.00	6.56	3.60	3.10	2.25	0.80
HP 065	1	58.50	43.46	23.16	19.66	10.71	1.28
	2	42.60	25.64	16.22	13.88	7.32	1.11
	3	20.50	15.88	8.18	6.81	3.91	0.58
HP 135	1	20.33	18.80	9.71	8.66	4.78	2.78
	2	11.14	10.16	6.60	6.38	2.22	1.11
	3	6.48	6.33	3.38	3.16	2.14	1.01
HP 320	1	10.88	9.73	5.02	3.73	2.54	1.04
	2	4.40	3.83	1.75	1.48	0.88	0.71
	3	2.75	2.11	1.05	0.87	0.77	0.61
	4	2.12	1.77	0.98	0.78	0.55	0.47
HP 500	1	4.44	3.67	2.30	2.10	1.65	0.15
	2	3.37	2.77	1.78	1.68	1.24	0.10
	3	2.22	1.98	1.11	1.09	0.75	0.08
	4	1.81	1.33	0.93	0.86	0.68	0.05
	5	1.33	1.15	0.77	0.68	0.48	0.04

Filter element	Absolute filtration N Series					Nominal filtration N Series	
	Type	A03	A06	A10	A16		A25
HF 320	1	3.65	2.95	2.80	1.80	0.90	0.38
	2	2.03	1.73	1.61	1.35	0.85	0.36
	3	1.84	1.42	1.32	1.22	0.80	0.35

## Stainless steel high pressure filters

Filter element	Absolute filtration N Series					
	Type	A03	A06	A10	A16	A25
HP 011	1	332.71	250.07	184.32	152.36	128.36
	2	220.28	165.56	74.08	59.13	37.05
	3	123.24	92.68	41.48	33.08	20.72
	4	77.76	58.52	28.37	22.67	16.17
HP 039	2	70.66	53.20	25.77	20.57	14.67
	3	36.57	32.28	18.00	13.38	8.00
	4	26.57	23.27	12.46	0.88	5.58
	1	31.75	30.30	13.16	12.3	7.29
HP 050	2	24.25	21.26	11.70	9.09	4.90
	3	17.37	16.25	8.90	7.18	3.63
	4	12.12	10.75	6.10	5.75	3.08
	5	7.00	6.56	3.60	3.10	2.25
	1	20.33	18.80	9.71	8.66	4.78
HP 135	2	11.14	10.16	6.60	6.38	2.22
	3	6.48	6.33	3.38	3.16	2.14

Filter element	Absolute filtration H - U Series					
	Type	A03	A06	A10	A16	A25
HP 011	1	424.58	319.74	235.17	194.44	163.78
	2	281.06	211.25	94.53	75.45	47.26
	3	130.14	97.50	43.63	34.82	21.81
	4	109.39	82.25	36.79	29.37	18.40
HP 039	2	70.66	53.20	25.77	20.57	14.67
	3	36.57	32.28	18.00	13.38	8.00
	4	26.57	23.27	12.46	8.80	5.58
	1	47.33	34.25	21.50	20.50	14.71
HP 050	2	29.10	25.95	14.04	10.90	5.88
	3	20.85	19.50	10.68	8.61	4.36
	4	14.55	12.90	7.32	6.90	3.69
	5	9.86	9.34	6.40	4.80	2.50
	1	29.16	25.33	13.00	12.47	5.92
HP 135	2	14.28	11.04	7.86	7.60	4.44
	3	8.96	7.46	4.89	4.16	3.07



**Step 1** Select "FILTERS"





**Step 2** Choose filter group (Return Filter, Pressure Filter, etc.)



**Step 3** Choose filter type (MPF, MPT, etc.) in function of the max working pressure and the max flow rate



**Step 4** Push "PROCEED"

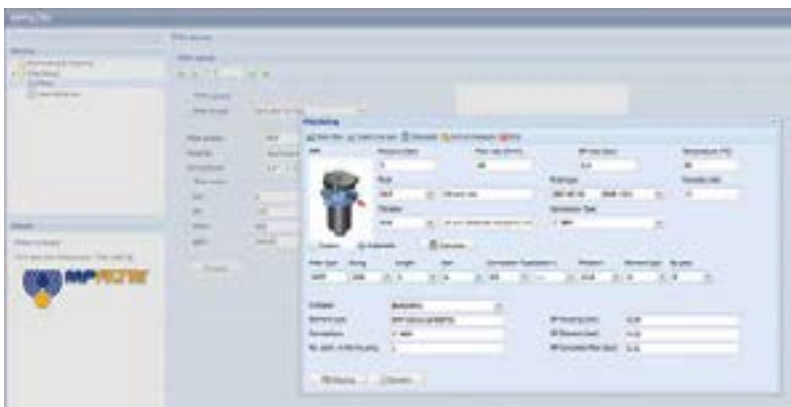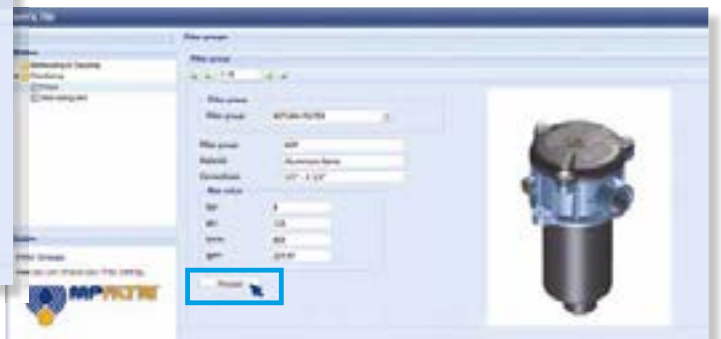


**Step 5**

Insert all application data to calculate the filter size following the sequence:

- working pressure
- working flow rate
- working pressure drop
- working temperature
- fluid material and fluid type
- filtration media
- connection type

**Step 6**

Push "CALCULATE" to have result; in case of any mistake, the system will advice which parameter is out of range to allow to modify/adjust the selection

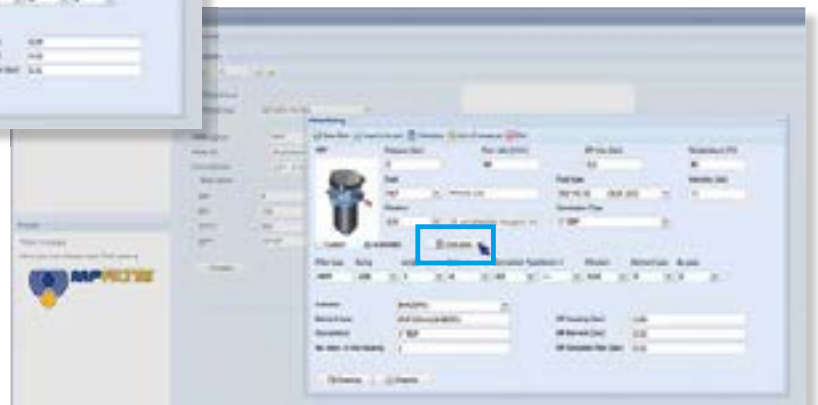

**Step 7**

Download PDF Datasheet "Report.aspx" pushing the button "Drawing"

**Return filters are used as process and safety filters to protect pumps and hydraulic circuits from contamination as per ISO 4406.**

**They are available in 4 styles:**

- **MPF tank top semi-immersed filter with external / internal oil flow; standard filter element disassembly**
- **MPT tank top semi-immersed filter with external / internal oil flow; easy filter element disassembly without any specific tool**
- **MFB bowl assembly fully immersed filter**
- **MPH tank top semi-immersed filter with internal / external oil flow, therefore keeping the dirt inside the bowl and not on the filter element; standard filter element disassembly, magnetic filter element as option**
- **MPI semi-immersed filter element specifically designed to be mounted directly on the oil tank; magnetic filter element as option**
- **FRI the oldest tank top semi-immersed return filter manufactured by MP FILTRI, with external / internal oil flow; available in the single or duplex versions with outlet connection, it can be used also as in-line filter**
- **RF2 semi-immersed under-head filter with external / internal oil flow; easy filter element disassembly without any specific tool.**

## FILTER SIZING

For the proper corrective factor Y see chapter at page 20

# Return filters



MPFX	page 59
MPTX	87
MFBX	105
MPF	111
MPT	139
MFB	157
MPH - MPI	163
FRI	193
RF2	207
INDICATORS	214
ACCESSORIES	224



THE NEW FILTER CONCEPT

MPFX  
MPTX  
MFBX  
MFX  
series

### NEW FILTER ELEMENT WITH EXCLUSIVE INTERFACE CONNECTION

- ◆ **Protects the machine from improper use of non-original products.**
- ◆ **Safety of constant quality protection & reliability**

With exclusive filter element you are sure that only filter elements MP Filtri can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.



The products identified as MPFX, MPTX, MFBX and MFX are protected by one or more of the following patent applications:

European Patent Pending: n° 16181725.9  
Italian Patent Pending: n° 102015000040473  
US Patent Pending: n° 15/224,337  
Canadian Patent Pending: n° 2,937,258



# MPFX series

Maximum pressure up to 8 bar - Flow rate up to 750 l/min



# MPFX GENERAL INFORMATION

## Technical data

**Return filter** Maximum pressure up to 8 bar - Flow rate up to 750 l/min

### Filter housing materials

- Head: Aluminium
- Cover: Nylon (only for: MPF 020-030-100-104-110)  
Aluminium (the other insert assemblies)
- Bowl: Nylon

### Seals

- Standard NBR series A
- Optional FPM series V

### Pressure

Working pressure: up to 800 kPa (8 bar)

### Temperature

From -25 °C to +110 °C

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)
- Opening pressure 300 kPa (3 bar)

### Note

MPFX filters are provided for vertical mounting

### $\Delta p$ element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN.

## Weights [kg] and volumes [dm<sup>3</sup>]











	Weights [kg]				Volumes [dm <sup>3</sup> ]					
	Lenght	1	2	3	4	Lenght	1	2	3	4
<b>MPFX 030</b>		0.40	-	-	-		0.29	-	-	-
<b>MPFX 100</b>		0.61	0.64	0.67	0.74		0.64	0.85	1.20	1.65
<b>MPFX 104</b>		0.82	0.96	1.02	1.25		0.64	0.85	1.20	1.65
<b>MPFX 110</b>		0.64	0.68	0.71	0.78					
<b>MPFX 181</b>		2.20	3.00	-	-		2.50	4.00	-	-
<b>MPFX 182</b>		2.30	3.10	-	-		2.50	4.00	-	-
<b>MPFX 184</b>		2.55	3.45	-	-		2.65	4.45	-	-
<b>MPFX 191</b>		-	3.00	-	-		-	4.25	-	-
<b>MPFX 192</b>		-	3.10	-	-		-	4.25	-	-
<b>MPFX 194</b>		-	3.45	-	-		-	4.45	-	-
<b>MPFX 400</b>		3.35	3.65	3.90	-		3.70	4.60	5.40	-
<b>MPFX 410</b>		3.55	3.85	4.10	-		3.70	4.60	5.40	-
<b>MPFX 450-451</b>		3.95	4.25	4.50	-		3.70	4.60	5.40	-
<b>MPFX 750</b>		6.30	-	-	-		8.45	-	-	-

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.

$\Delta p$  varies proportionally with density.


Pressure drop

Filter housings  $\Delta p$  pressure drop

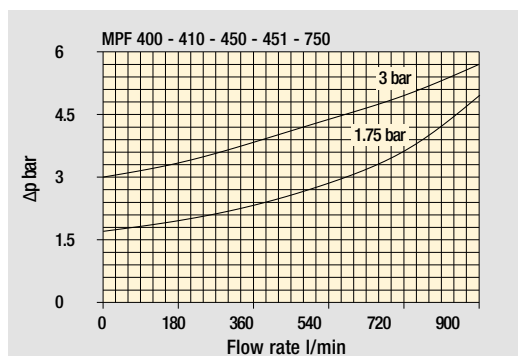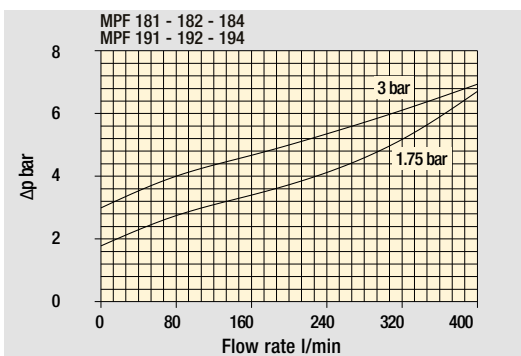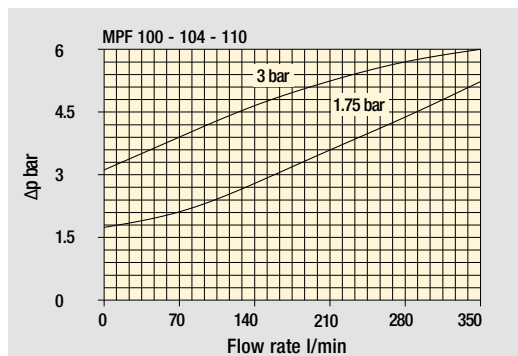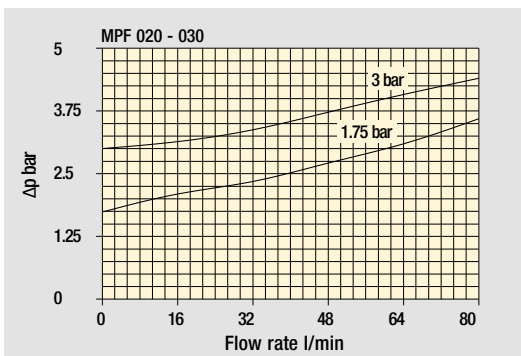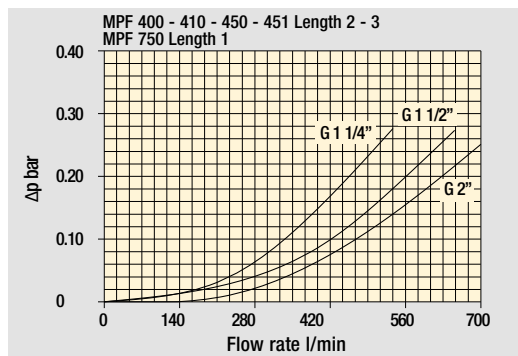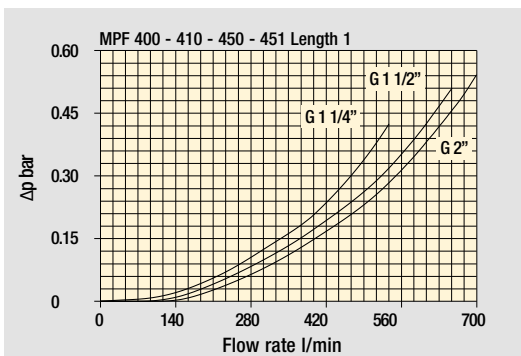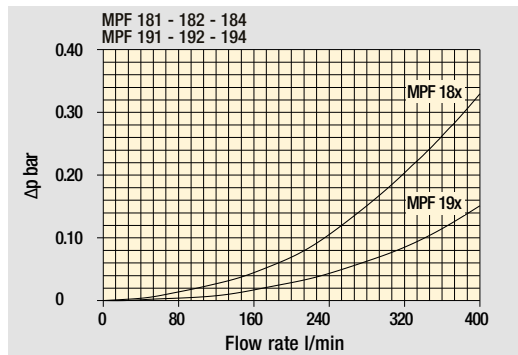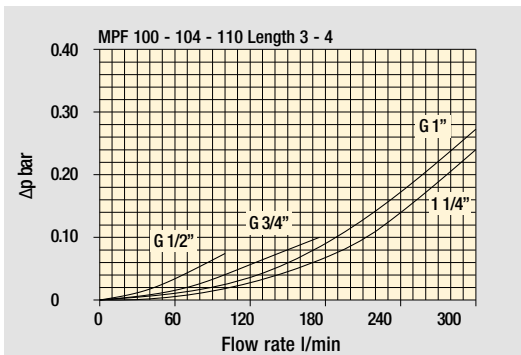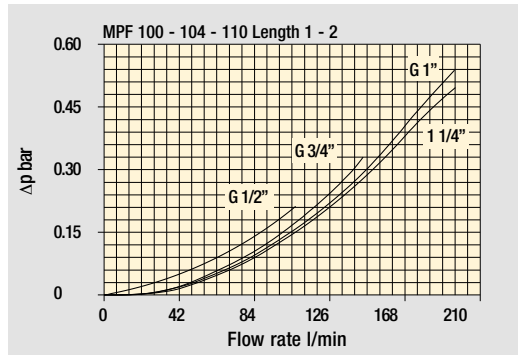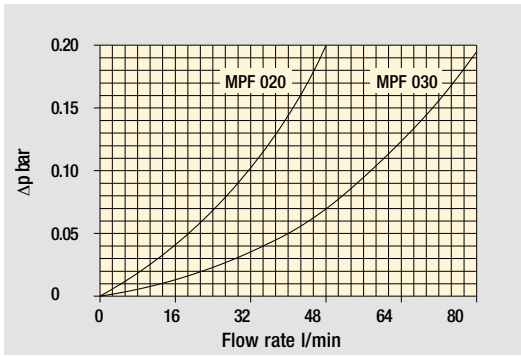


Bypass valve pressure drop


Style  
1 connection

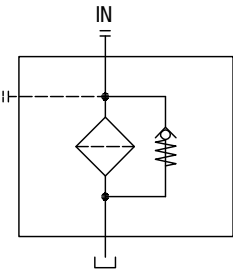

Style  
2 connections

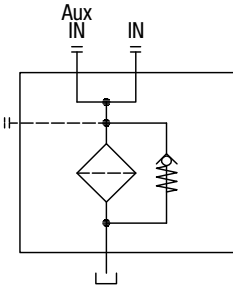

Style  
3 connections

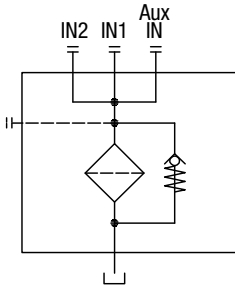




Standard - Single IN port



Double IN port  
Option: double indicator port



Double IN port - Drain port  
Option: indicator port

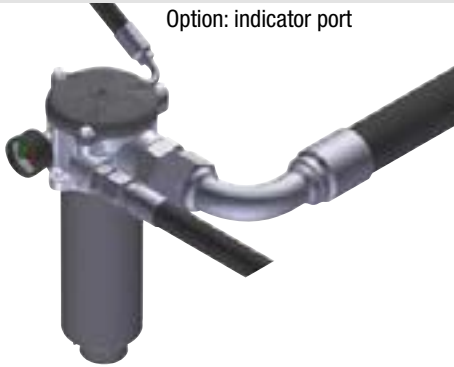

Double IN port - Double drain port



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1:		MPFX030	1	V	G1	M25	N	B	P01
<b>MPFX030</b> Filter element with private spigot	Configuration example 2:		MPFX030	1	A	G4	A10	H	E	P01
<b>Length</b>	1									
<b>Seals and treatments</b>										
<b>A</b> NBR										
<b>V</b> FPM										
<b>W</b> NBR head anodized										
<b>Z</b> FPM head anodized										
<b>Connections</b>										
<b>G1</b> G1/2"										
<b>G4</b> 1/2" NPT										
<b>G7</b> SAE 8 - 3/4" - 16 UNF										
<b>Filtration rating (filter media)</b>										
<b>A03</b> Inorganic microfiber 3 µm			<b>M25</b> Wire mesh 25 µm							
<b>A06</b> Inorganic microfiber 6 µm			<b>M60</b> Wire mesh 60 µm							
<b>A10</b> Inorganic microfiber 10 µm			<b>M90</b> Wire mesh 90 µm							
<b>A16</b> Inorganic microfiber 16 µm			<b>P10</b> Resin impregnated paper 10 µm							
<b>A25</b> Inorganic microfiber 25 µm			<b>P25</b> Resin impregnated paper 25 µm							
<b>Element Δp</b>	Filter media									
	Axx	Mxx	Pxx							
<b>N</b> 10 bar		•	•							
<b>H</b> 10 bar	•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•								
			<b>Bypass valve</b>			<b>Execution</b>				
			<b>E</b> 3 bar			<b>P01</b> MP Filtri standard				
			<b>B</b> 1.75 bar			<b>Pxx</b> Customized				


### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1:		MFX030	1	M25	N	V		P01
<b>MFX030</b> Filter element with private spigot	Configuration example 2:		MFX030	1	A10	H	B	E	P01
<b>Element length</b>	1								
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm			<b>M25</b> Wire mesh 25 µm						
<b>A06</b> Inorganic microfiber 6 µm			<b>M60</b> Wire mesh 60 µm						
<b>A10</b> Inorganic microfiber 10 µm			<b>M90</b> Wire mesh 90 µm						
<b>A16</b> Inorganic microfiber 16 µm			<b>P10</b> Resin impregnated paper 10 µm						
<b>A25</b> Inorganic microfiber 25 µm			<b>P25</b> Resin impregnated paper 25 µm						
<b>Element Δp</b>	Filter media								
	Axx	Mxx	Pxx						
<b>N</b> 10 bar		•	•						
<b>H</b> 10 bar	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•							
			<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>		
			<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard		
			<b>V</b> FPM		1.75 bar		<b>Pxx</b> Customized		

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		
<b>TE</b> Extension tube	224		
<b>T5</b> Filler plug M30x1.5	225		

MPFX030

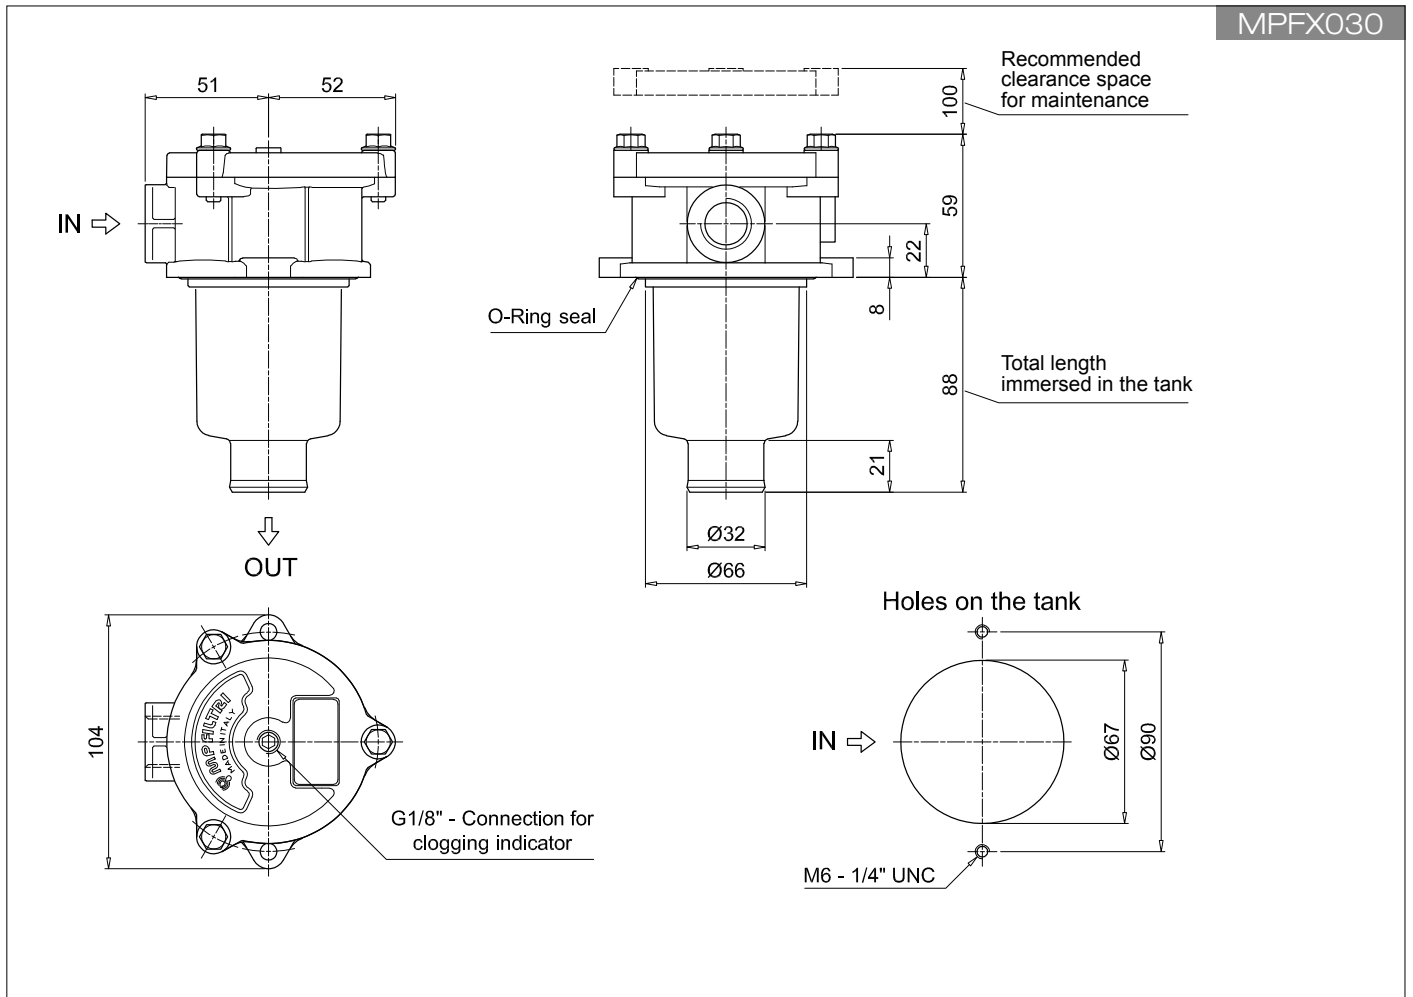

# MPFX MPFX100 - MPFX104

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>		Configuration example 1: <b>MPFX100</b>   <b>2</b>   <b>W</b>   <b>G3</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b>P01</b>									
<b>MPFX100</b>   <b>MPFX104</b> Filter element with private spigot		Configuration example 2: <b>MPFX104</b>   <b>4</b>   <b>A</b>   <b>G8</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>									
<b>Length</b>											
<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>											
<b>Seals and treatments</b>											
<b>A</b> NBR											
<b>V</b> FPM											
<b>W</b> NBR head anodized											
<b>Z</b> FPM head anodized											
<b>Connections</b>		<b>Size 100</b>		<b>Size 104</b>		<b>Connections</b>		<b>Size 100</b>		<b>Size 104</b>	
<b>G1</b>	G1/2"	•	•	<b>G7</b>	SAE 8 - 3/4" - 16 UNF	•	•	<b>G2</b>	G3/4"	•	•
<b>G2</b>	G3/4"	•	•	<b>G8</b>	SAE 12 - 1 1/16" - 12 UN	•	•	<b>G3</b>	G1"	•	•
<b>G3</b>	G1"	•	•	<b>G9</b>	SAE 16 - 1 5/16" - 12 UN	•	•	<b>G4</b>	1/2" NPT	•	•
<b>G4</b>	1/2" NPT	•	•	<b>G10</b>	G1 1/4"	•	•	<b>G5</b>	3/4" NPT	•	•
<b>G5</b>	3/4" NPT	•	•	<b>G11</b>	1 1/4" NPT	•	•	<b>G6</b>	1" NPT	•	•
<b>G6</b>	1" NPT	•	•	<b>G12</b>	SAE 20 - 1 5/8" - 12 UN	•	•				
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>				<b>Filter media</b>							
				<b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>							
<b>N</b> 10 bar				•		•					
<b>H</b> 10 bar				•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC				•		•					
								<b>Bypass valve</b>		<b>Execution</b>	
								<b>E</b> 3 bar		<b>P01</b> MP Filtri standard	
								<b>B</b> 1.75 bar		<b>Pxx</b> Customized	

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MPFX100</b>   <b>2</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b>P01</b>									
<b>MPFX100</b> Filter element with private spigot		Configuration example 2: <b>MPFX100</b>   <b>4</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b>									
<b>Element length</b>											
<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>				<b>Filter media</b>							
				<b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>							
<b>N</b> 10 bar				•		•					
<b>H</b> 10 bar				•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC				•		•					
								<b>Seals</b>		<b>Bypass valve</b>	
								<b>B</b> NBR		<b>E</b> 3 bar	
								<b>V</b> FPM		<b>B</b> 1.75 bar	
										<b>Execution</b>	
										<b>P01</b> MP Filtri standard	
										<b>Pxx</b> Customized	

### ACCESSORIES

<b>Indicators</b>		<b>page</b>		<b>page</b>	
<b>BVA</b>	Axial pressure gauge	216	<b>BEA</b>	Electrical pressure indicator	215
<b>BVR</b>	Radial pressure gauge	216	<b>BEM</b>	Electrical pressure indicator	215
<b>BVP</b>	Visual pressure indicator with automatic reset	217	<b>BLA</b>	Electrical / visual pressure indicator	215-216
<b>BVQ</b>	Visual pressure indicator with manual reset	217			
<b>Additional features</b>		<b>page</b>		<b>page</b>	
<b>TE</b>	Extension tube	224	<b>T5</b>	Filler plug M30x1.5	225
<b>DFS</b>	Diffuser with fast lock connection	225	<b>DPT</b>	Dipstick	225

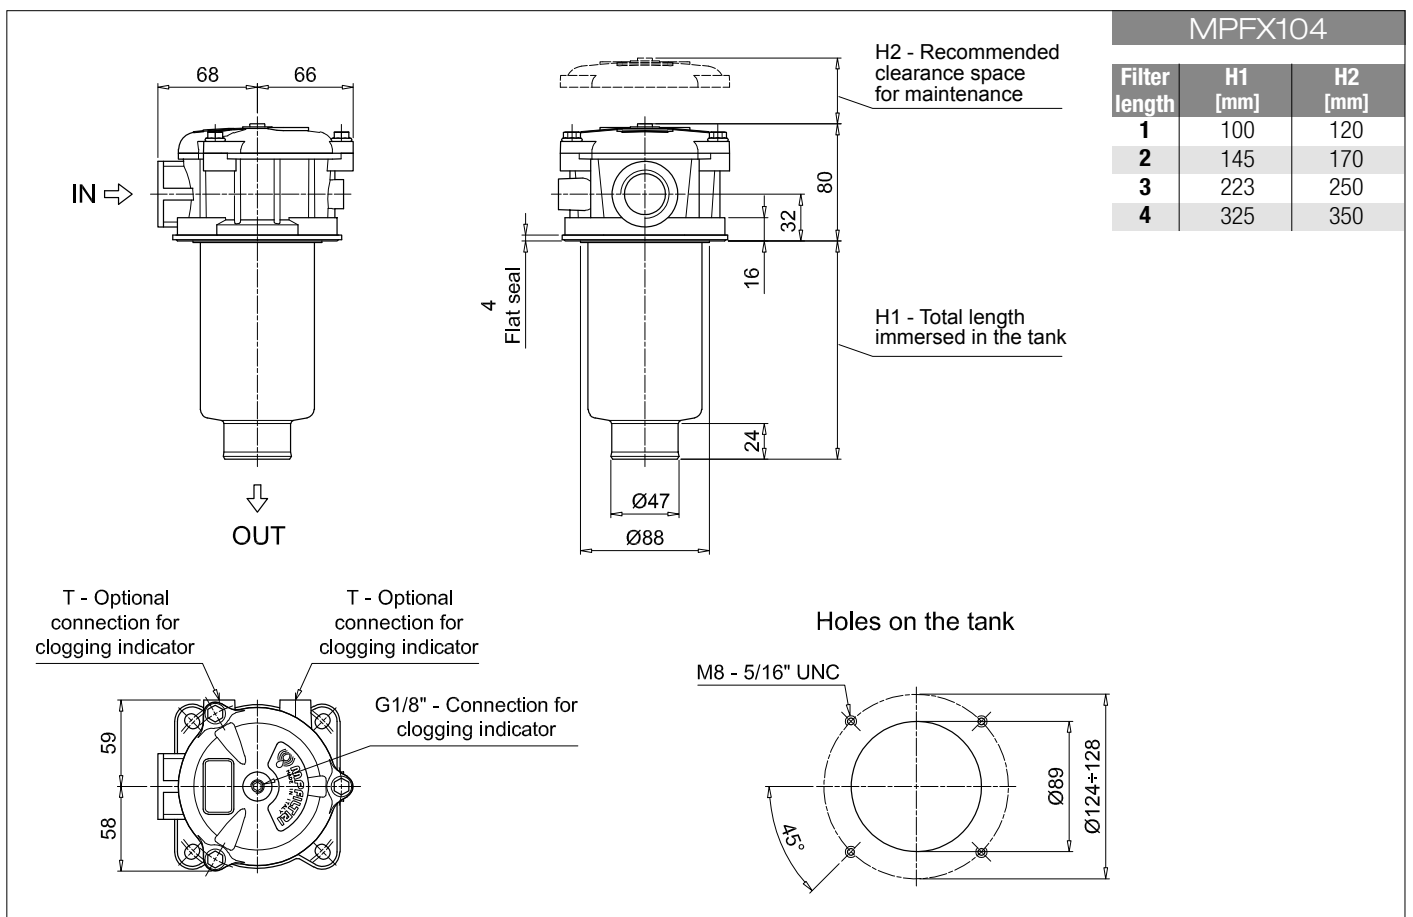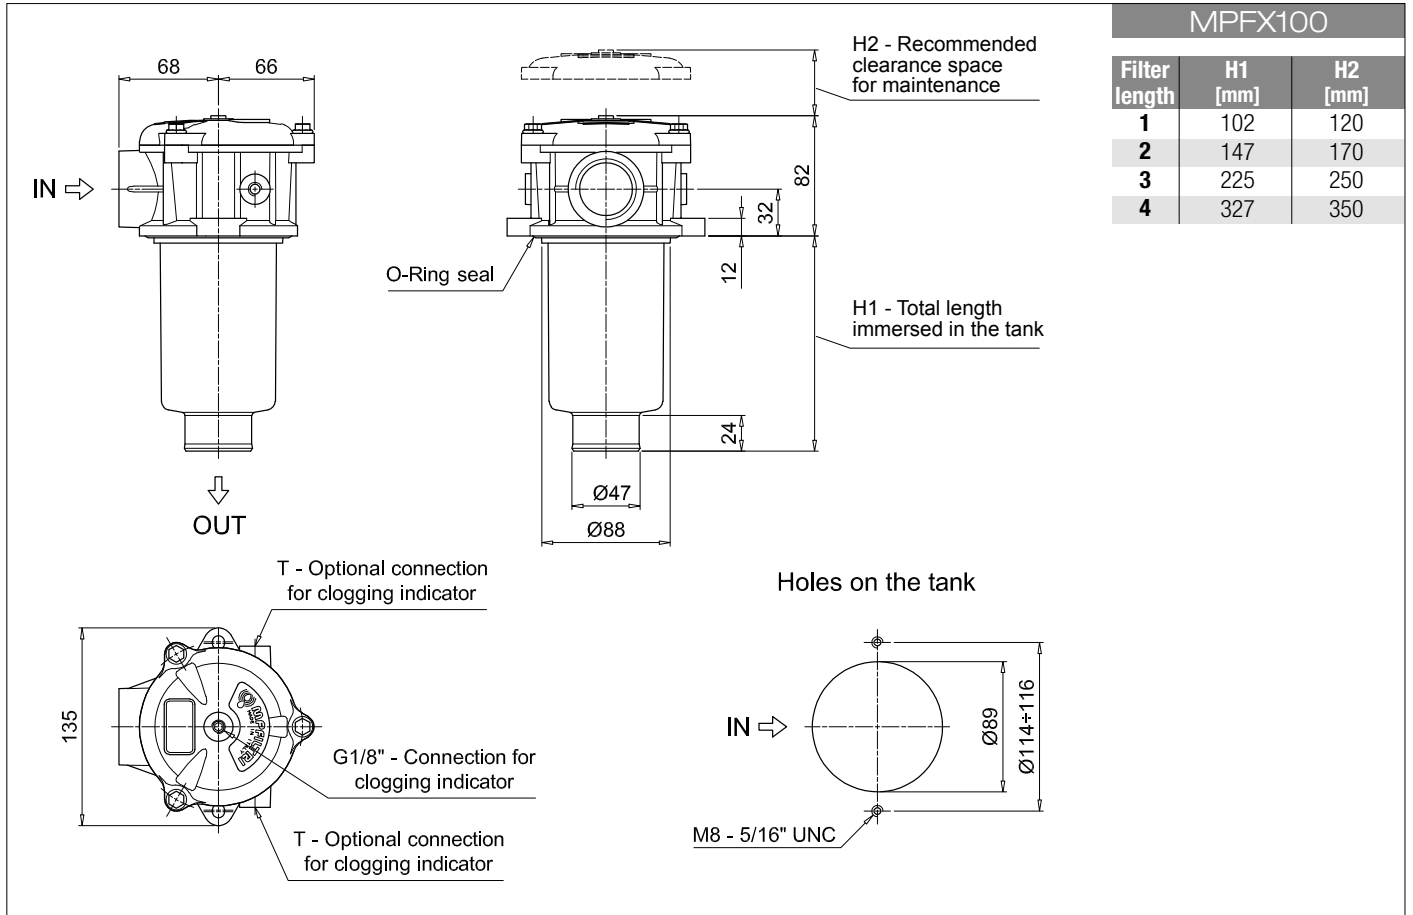

## Designation & Ordering code

### COMPLETE FILTER


<b>Series and size</b>		Configuration example 1: <b>MPFX110</b>   <b>3</b>   <b>Z</b>   <b>G4</b>   <b>2</b>   <b>M25</b>   <b>W</b>   <b>B</b>   <b>P01</b>									
<b>MPFX110</b> Filter element with private spigot		Configuration example 2: <b>MPFX110</b>   <b>4</b>   <b>A</b>   <b>G8</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>									
<b>Length</b>											
1   2   3   4											
<b>Seals and treatments</b>											
<b>A</b> NBR		<b>W</b> NBR head anodized									
<b>V</b> FPM		<b>Z</b> FPM head anodized									
<b>Main Connections</b>		<b>Aux size 1</b>		<b>Aux size 2</b>		<b>Main Connections</b>		<b>Aux size 1</b>		<b>Aux size 2</b>	
<b>G1</b> G1/2"		G3/8"		G1/2"		<b>G7</b> SAE 8 - 3/4" - 16 UNF		SAE 6 - 9/16" - 18 UNF		SAE 8 - 3/4" - 16 UNF	
<b>G2</b> G3/4"						<b>G8</b> SAE 12 - 1 1/16" - 12 UN					
<b>G3</b> G1"						<b>G9</b> SAE 16 - 1 5/16" - 12 UN					
<b>G4</b> 1/2" NPT						<b>G10</b> G1 1/4"		G3/8"		G1/2"	
<b>G5</b> 3/4" NPT		3/8" NPT		1/2" NPT		<b>G11</b> 1 1/4" NPT		3/8" NPT		1/2" NPT	
<b>G6</b> 1" NPT						<b>G12</b> SAE 20 - 1 5/8" - 12 UN		SAE 6 - 9/16" - 18 UNF		SAE 8 - 3/4" - 16 UNF	
<b>Aux connection</b> - see previous table											
<b>1</b> Aux size 1		<b>2</b> Aux size 2									
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		<b>Filter media</b>									
		Axx   Mxx   Pxx									
<b>N</b> 10 bar				• •							
<b>H</b> 10 bar				•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC				• •							
				<b>Bypass valve</b>		<b>Execution</b>					
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard					
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized					

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MPFX100</b>   <b>3</b>   <b>M25</b>   <b>W</b>   <b>V</b>   <b></b>   <b>P01</b>									
<b>MPFX100</b> Filter element with private spigot		Configuration example 2: <b>MPFX100</b>   <b>4</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b>									
<b>Element length</b>											
1   2   3   4											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		<b>Filter media</b>									
		Axx   Mxx   Pxx									
<b>N</b> 10 bar				• •							
<b>H</b> 10 bar				•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC				• •							
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>			
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard			
				<b>V</b> FPM		1.75 bar		<b>Pxx</b> Customized			

### ACCESSORIES

<b>Indicators</b>		page		page	
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215		
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215		
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216		
<b>BVQ</b> Visual pressure indicator with manual reset	217				
<b>Additional features</b>		page		page	
<b>TE</b> Extension tube	224	<b>T5</b> Filler plug M30x1.5	225		
<b>DFS</b> Diffuser with fast lock connection	225	<b>DPT</b> Dipstick	225		

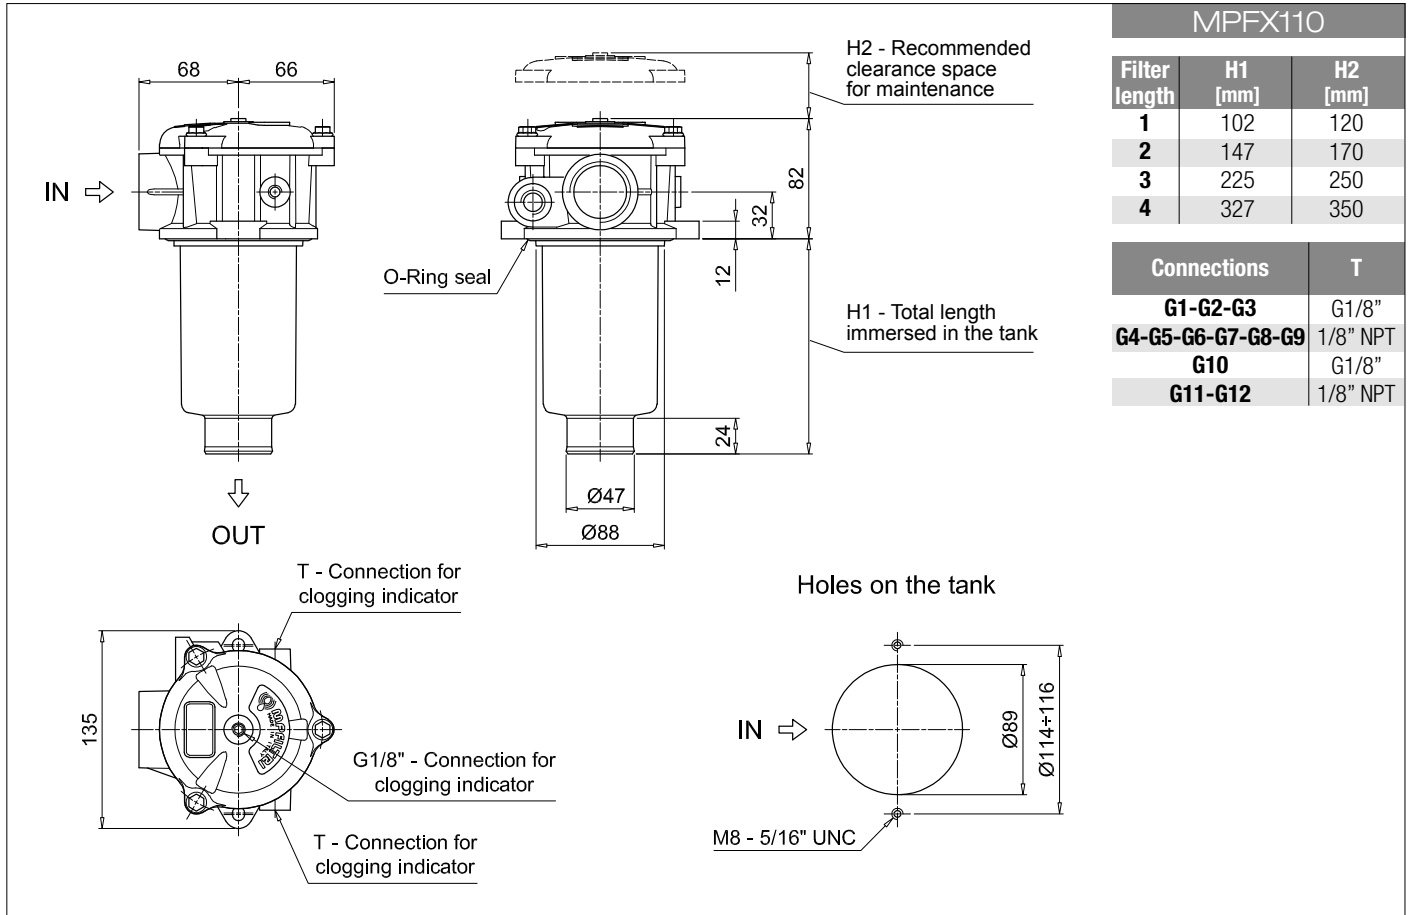

# MPFX MPFX181 - MPFX191

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>		Configuration example 1: <b>MPFX181</b>   1   A   G1   A25   H   E   P01							
<b>MPFX181   MPFX191</b> Filter element with private spigot		Configuration example 2: <b>MPFX191</b>   2   V   G2   P10   N   B   P01							
<b>Length</b>	<b>Size 181</b>	<b>Size 191</b>							
1	•								
2	•	•							
<b>Seals and treatments</b>									
<b>A</b> NBR	<b>B</b> NBR flat seal on head								
<b>V</b> FPM	<b>D</b> FPM flat seal on head								
<b>W</b> NBR head anodized	<b>L</b> NBR head anodized, flat seal on head								
<b>Z</b> FPM head anodized	<b>M</b> FPM head anodized, flat seal on head								
<b>Connections</b>									
<b>G1</b> G1 1/4"	<b>G5</b> 1 1/2" NPT								
<b>G2</b> G1 1/2"	<b>G7</b> SAE 20 - 1 5/8" - 12 UN								
<b>G4</b> 1 1/4" NPT	<b>G8</b> SAE 24 - 1 7/8" - 12 UN								
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm								
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm								
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm								
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm								
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm								
<b>Element Δp</b>	<b>Filter media</b>								
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>N</b> 10 bar		•	•						
<b>H</b> 10 bar	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•							
		<b>Bypass valve</b>	<b>Execution</b>						
		<b>E</b> 3 bar	<b>P01</b> MP Filtri standard						
		<b>B</b> 1.75 bar	<b>Pxx</b> Customized						



### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MFX180</b>   1   A25   H   B   E   P01							
<b>MFX180</b> Filter element with private spigot		Configuration example 2: <b>MFX180</b>   2   P10   N   V     P01							
<b>Element length</b>									
1									
2									
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm								
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm								
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm								
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm								
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm								
<b>Element Δp</b>	<b>Filter media</b>								
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>N</b> 10 bar		•	•						
<b>H</b> 10 bar	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•							
		<b>Seals</b>	<b>Bypass valve</b>	<b>Execution</b>					
		<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard					
		<b>V</b> FPM	1.75 bar	<b>Pxx</b> Customized					

### ACCESSORIES

<b>Indicators</b>	page				page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator			215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator			215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator			215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217				
<b>Additional features</b>	page				
<b>TE</b> Extension tube	224				
<b>T5</b> Filler plug M30x1.5	225				



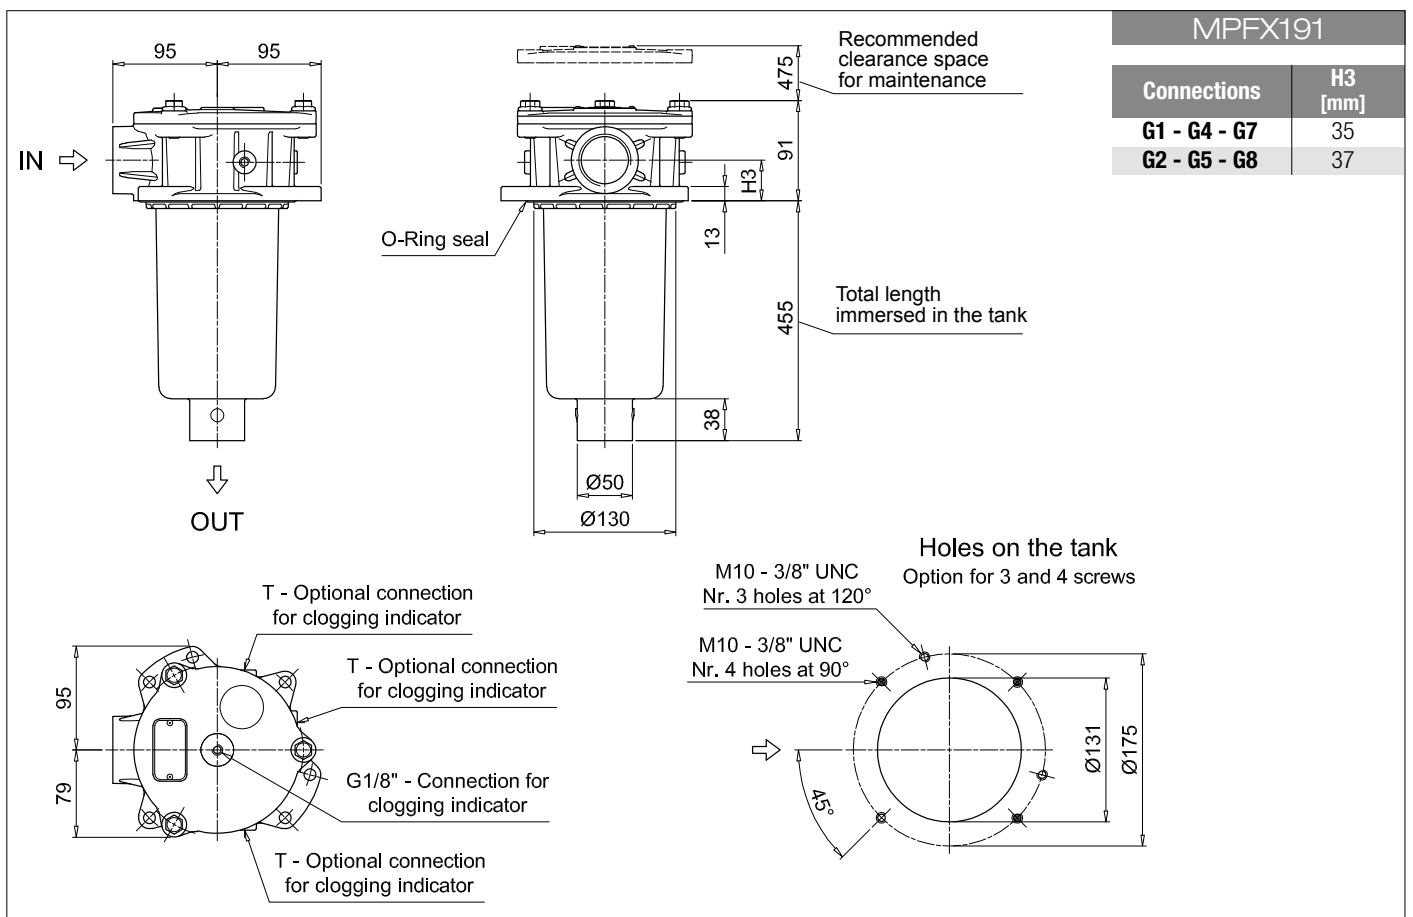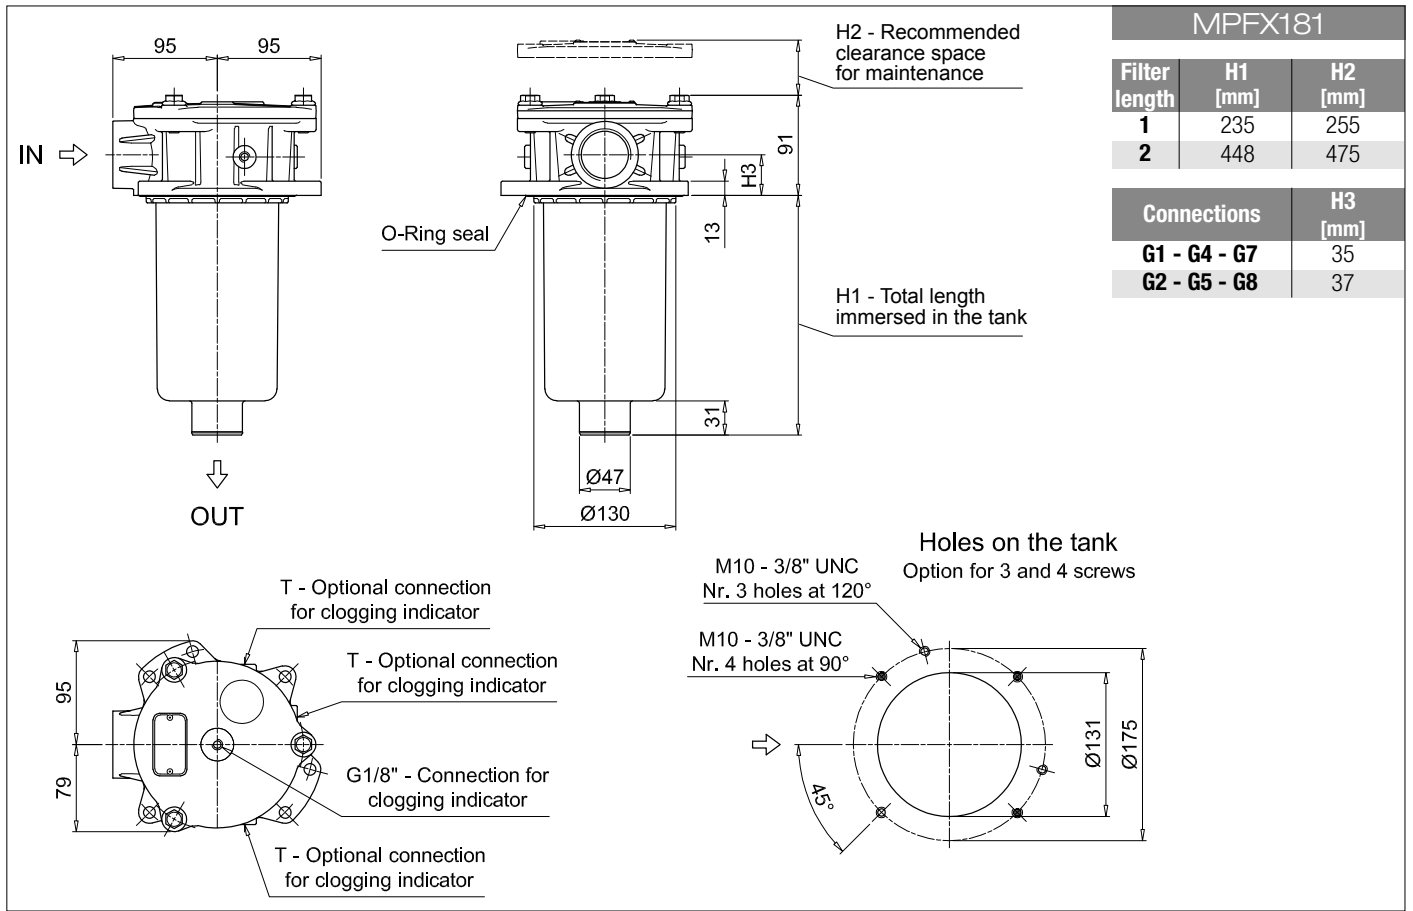

# MPFX MPFX182 - MPFX192

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>		Configuration example 1: <b>MPFX182</b>   1   A   G1   1   A25   H   E   P01										
<b>MPFX182 MPFX192</b> Filter element with private spigot		Configuration example 2: <b>MPFX192</b>   2   V   G2   2   P10   N   B   P01										
<b>Length</b>	<b>Size 182</b>	<b>Size 192</b>										
1	•											
2	•	•										
<b>Seals and treatments</b>												
<b>A</b> NBR	<b>B</b> NBR flat seal on head											
<b>V</b> FPM	<b>D</b> FPM flat seal on head											
<b>W</b> NBR head anodized	<b>L</b> NBR head anodized, flat seal on head											
<b>Z</b> FPM head anodized	<b>M</b> FPM head anodized, flat seal on head											
<b>Main Connections</b>		<b>Aux size 1</b>	<b>Aux size 2</b>									
<b>G1</b> G1 1/4"	G1/2"	G3/4"										
<b>G4</b> 1 1/4" NPT	1/2" NPT	3/4" NPT										
<b>G7</b> SAE 20 - 1 5/8" - 12 UN	SAE 8 - 3/16" - 16 UNF	SAE 12 - 1 1/16" - 12 UN										
<b>Aux connection</b> - see previous table												
<b>1</b> Aux size 1	<b>2</b> Aux size 2											
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm											
<b>Element Δp</b>		<b>Filter media</b>										
<b>N</b> 10 bar	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>									
<b>H</b> 10 bar		•	•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•										
		<b>Bypass valve</b>		<b>Execution</b>								
		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard								
		<b>B</b> 1.75 bar		<b>Pxx</b> Customized								

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MFX180</b>   1   A25   H   B   E   P01									
<b>MFX180</b> Filter element with private spigot		Configuration example 2: <b>MFX180</b>   2   P10   N   V     P01									
<b>Element length</b>											
1											
2											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm										
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm										
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm										
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm										
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm										
<b>Element Δp</b>		<b>Filter media</b>									
<b>N</b> 10 bar	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>								
<b>H</b> 10 bar		•	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•									
		<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>					
		<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard					
		<b>V</b> FPM		<b>1.75 bar</b>		<b>Pxx</b> Customized					

### ACCESSORIES

<b>Indicators</b>	page								page
<b>BVA</b> Axial pressure gauge	216				<b>BEA</b> Electrical pressure indicator				215
<b>BVR</b> Radial pressure gauge	216				<b>BEM</b> Electrical pressure indicator				215
<b>BVP</b> Visual pressure indicator with automatic reset	217				<b>BLA</b> Electrical / visual pressure indicator				215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217								
<b>Additional features</b>	page								
<b>TE</b> Extension tube	224								
<b>T5</b> Filler plug M30x1.5	225								

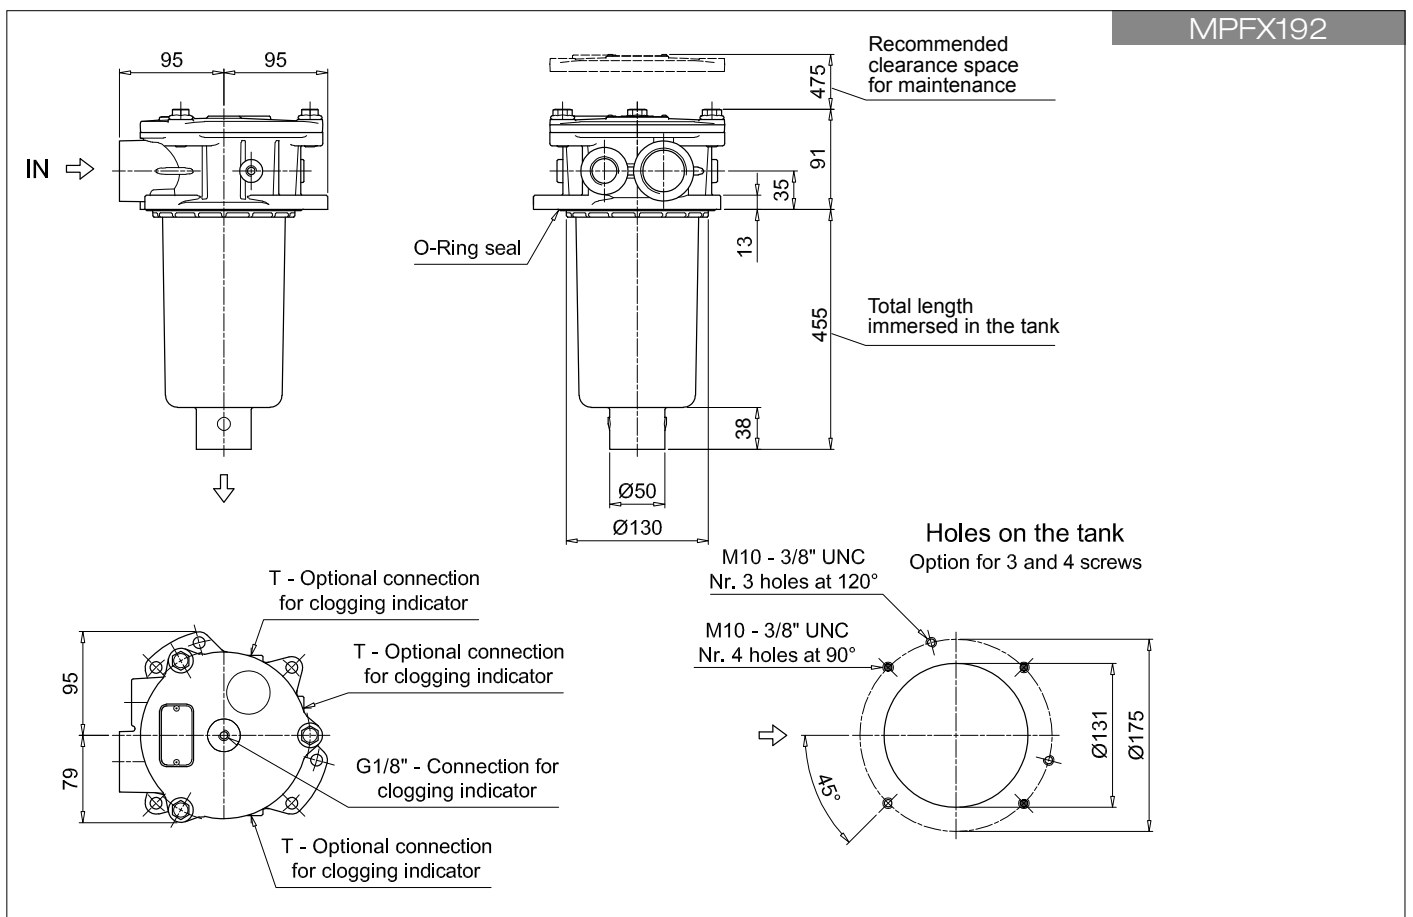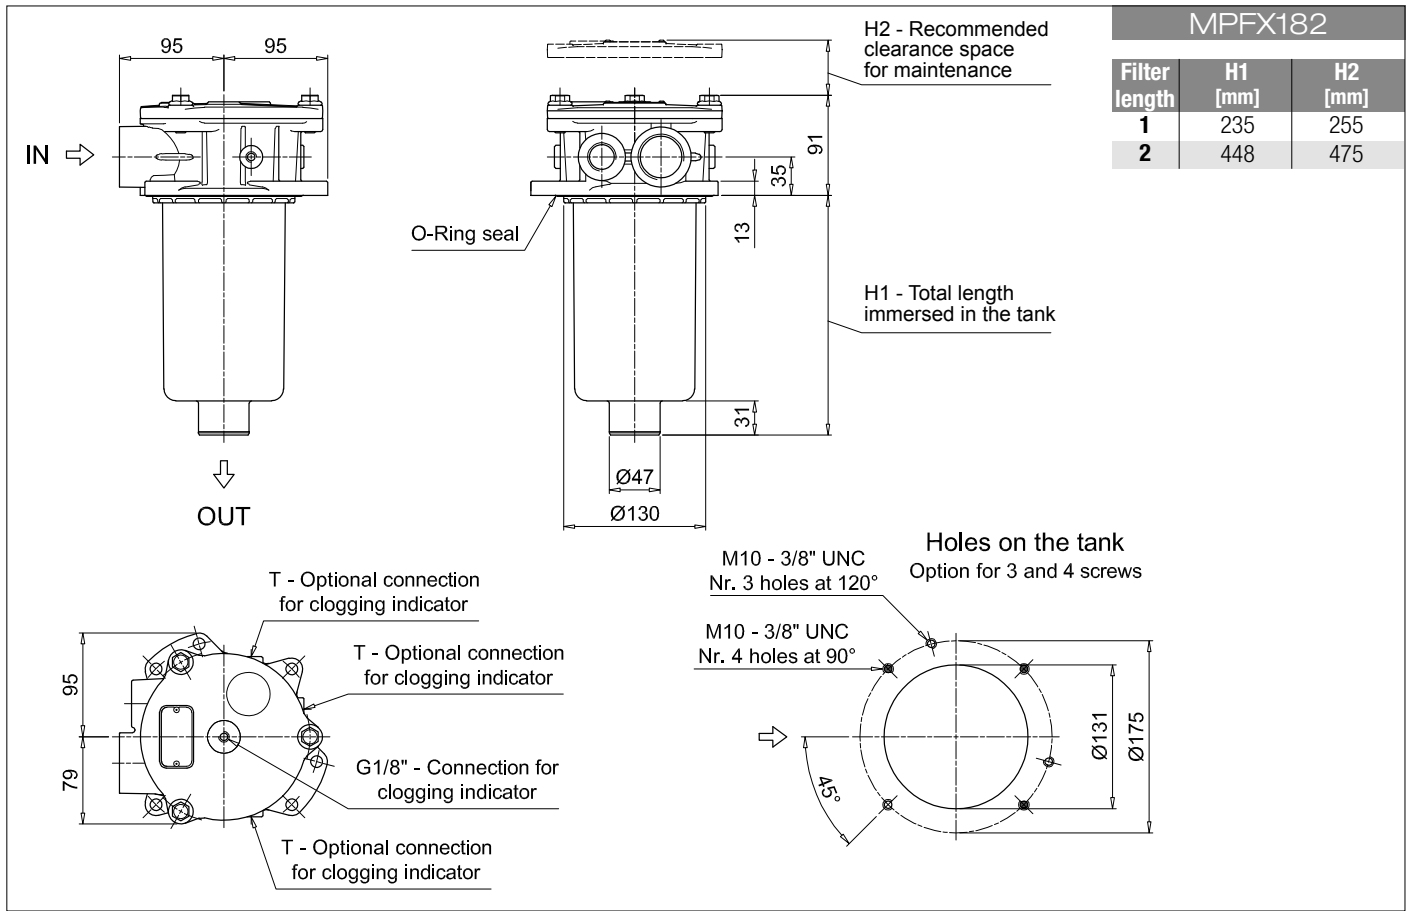

# MPFX MPFX184 - MPFX194

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>		Configuration example 1: <b>MPFX184</b>   1   A   G1   A25   H   E   P01										
<b>MPFX184   MPFX194</b> Filter element with private spigot		Configuration example 2: <b>MPFX194</b>   2   V   F3   P10   N   B   P01										
<b>Length</b>	<b>Size 184</b>	<b>Size 194</b>										
1	•											
2	•	•										
<b>Seals and treatments</b>												
<b>A</b> NBR	<b>W</b> NBR	head anodized										
<b>V</b> FPM	<b>Z</b> FPM	head anodized										
<b>Main Connections</b>		<b>Rear connections</b>		<b>Main Connections</b>		<b>Rear connections</b>						
<b>G1</b> G1 1/4"	-		<b>G13</b> G1 1/2"	-								
<b>G2</b> G1 1/4"	G1 1/4"		<b>G14</b> G1 1/2"	G1 1/4"								
<b>G4</b> 1 1/4" NPT	-		<b>G15</b> 1 1/2" NPT	-								
<b>G5</b> 1 1/4" NPT	1 1/4" NPT		<b>G16</b> 1 1/2" NPT	1 1/4" NPT								
<b>G7</b> SAE 20 - 1 5/8" - 12 UN	-		<b>F1</b> 1 1/2" SAE 3000 psi/M	-								
<b>G8</b> SAE 20 - 1 5/8" - 12 UN	SAE 20 - 1 5/8" - 12 UN		<b>F2</b> 1 1/2" SAE 3000 psi/UNC	-								
<b>G10</b> SAE 24 - 1 7/8" - 12 UN	-		<b>F3</b> 1 1/2" SAE 3000 psi/M	1 1/2" SAE 3000 psi/M								
<b>G11</b> SAE 24 - 1 7/8" - 12 UN	SAE 20 - 1 5/8" - 12 UN		<b>F4</b> 1 1/2" SAE 3000 psi/UNC	1 1/2" SAE 3000 psi/UNC								
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm			<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm			<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm			<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm			<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm			<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		<b>Filter media</b>										
<b>N</b> 10 bar	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>									
<b>H</b> 10 bar		•	•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•										
				<b>Bypass valve</b>		<b>Execution</b>						
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard						
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized						

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MPFX180</b>   1   A25   H   B   E   P01										
<b>MPFX180</b> Filter element with private spigot		Configuration example 2: <b>MPFX180</b>   2   P10   N   V     P01										
<b>Element length</b>												
1												
2												
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm			<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm			<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm			<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm			<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm			<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		<b>Filter media</b>										
<b>N</b> 10 bar	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>									
<b>H</b> 10 bar		•	•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•										
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>				
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard				
				<b>V</b> FPM		1.75 bar		<b>Pxx</b> Customized				



### ACCESSORIES

<b>Indicators</b>	page						page
<b>BVA</b> Axial pressure gauge	216			<b>BEA</b> Electrical pressure indicator			215
<b>BVR</b> Radial pressure gauge	216			<b>BEM</b> Electrical pressure indicator			215
<b>BVP</b> Visual pressure indicator with automatic reset	217			<b>BLA</b> Electrical / visual pressure indicator			215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217						
<b>Additional features</b>	page						
<b>TE</b> Extension tube	224						
<b>T5</b> Filler plug M30x1.5	225						

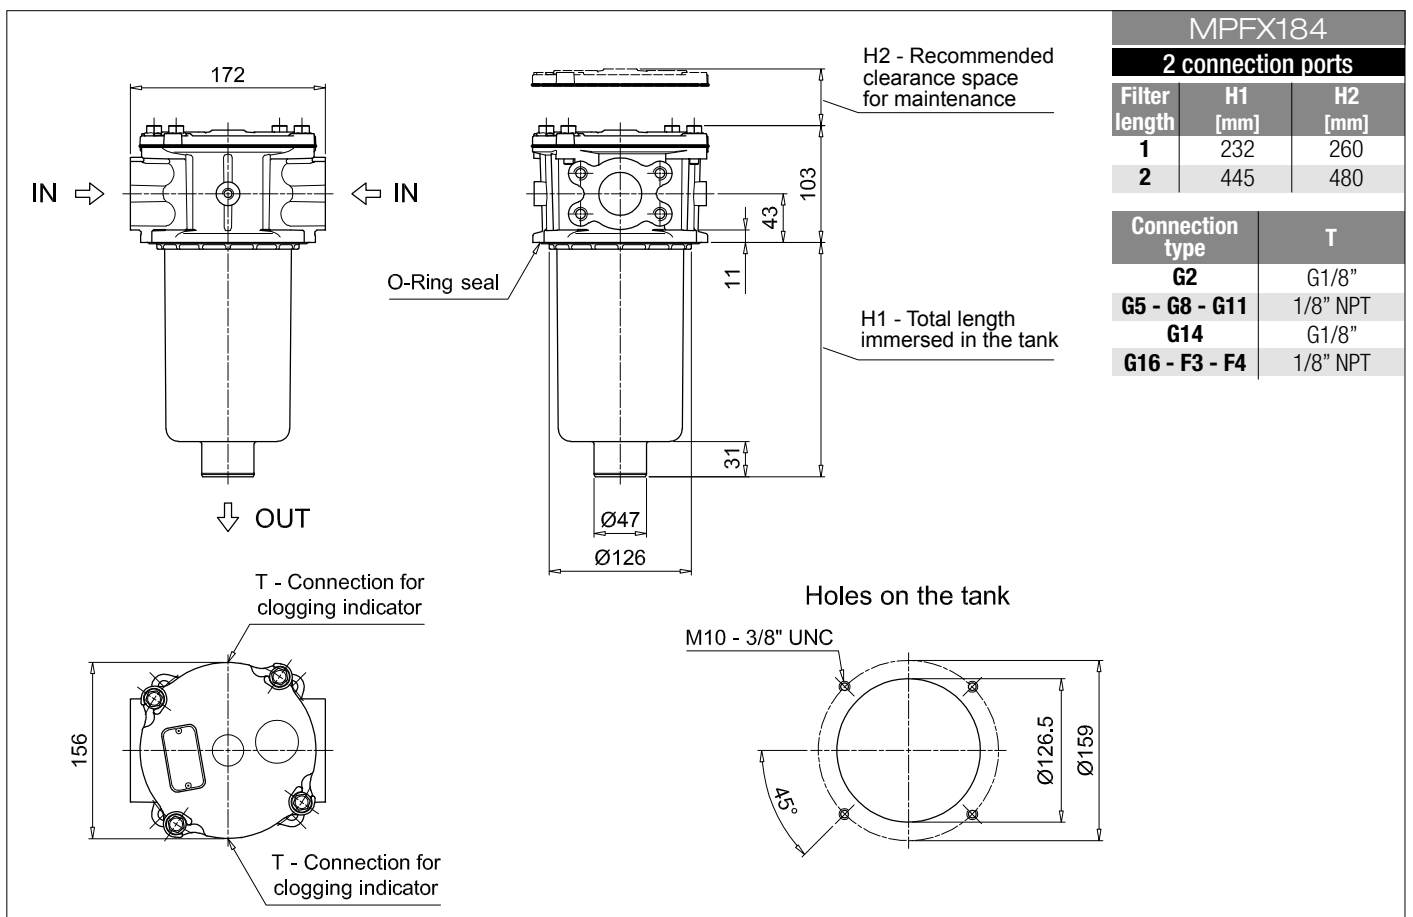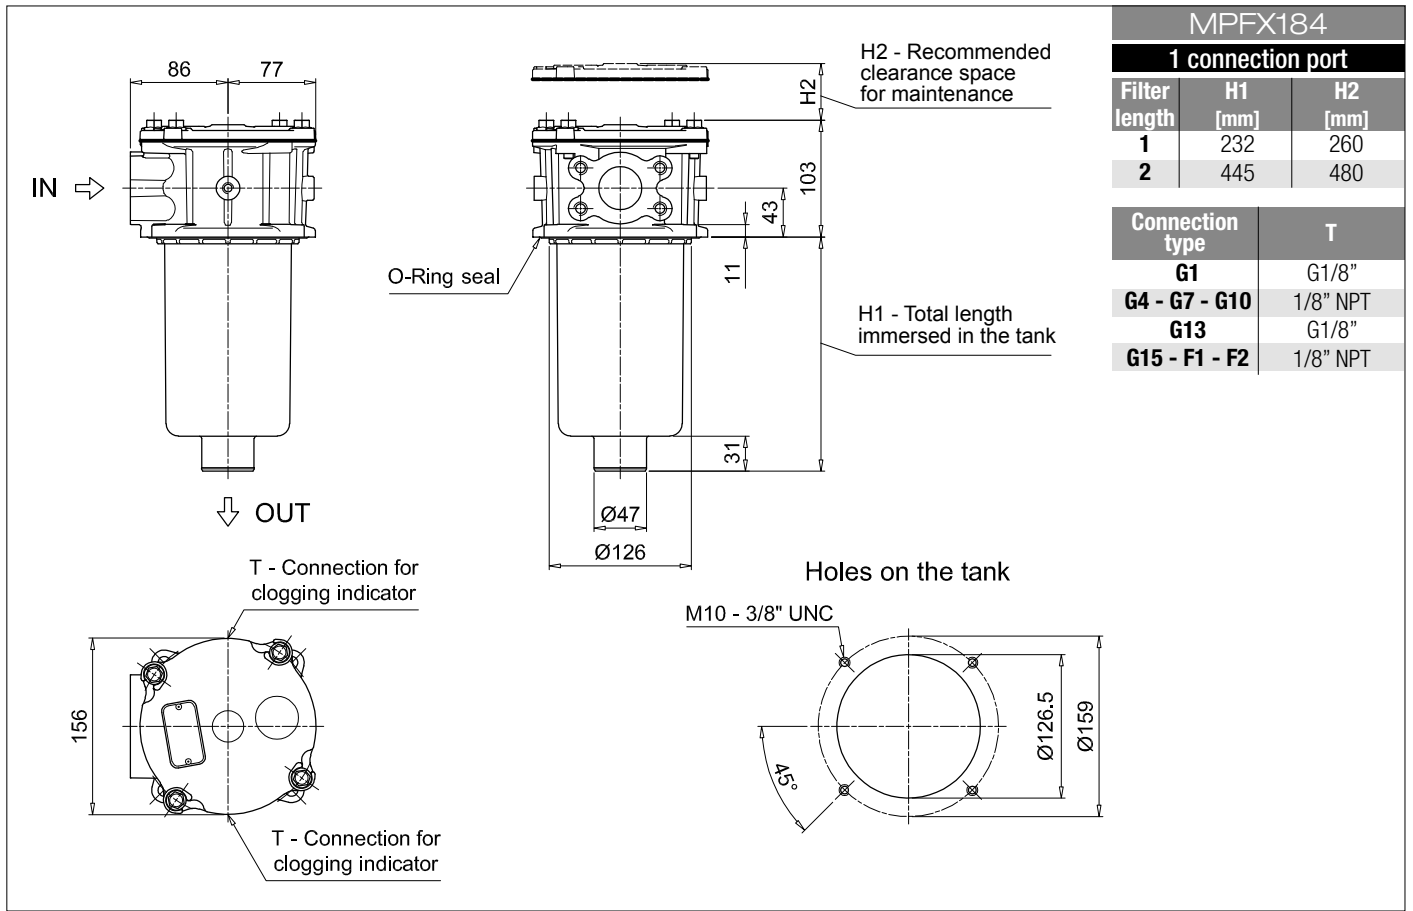

# MPFX MPFX184 - MPFX194

## Dimensions

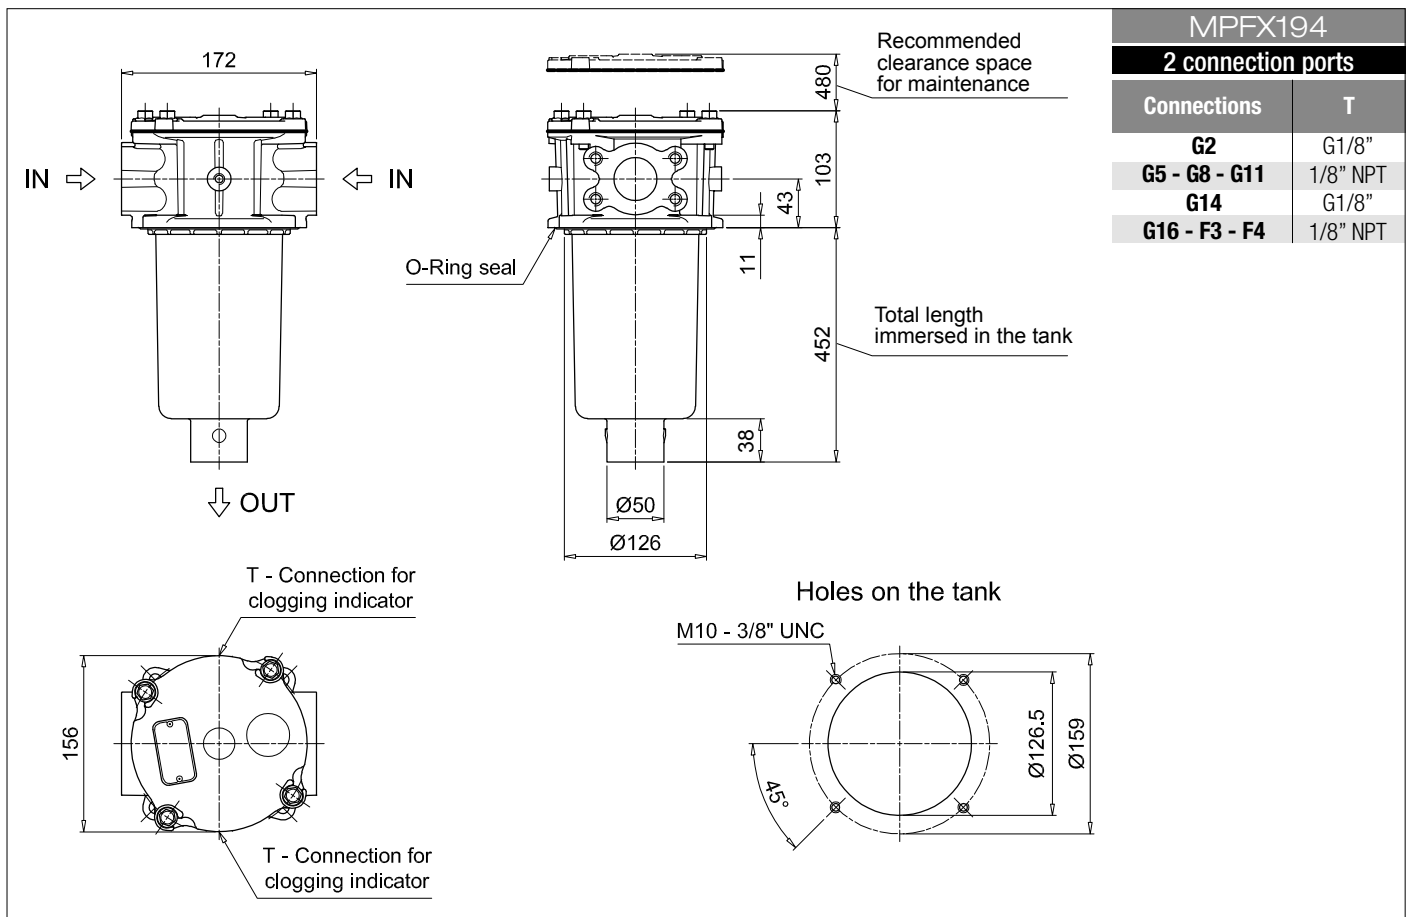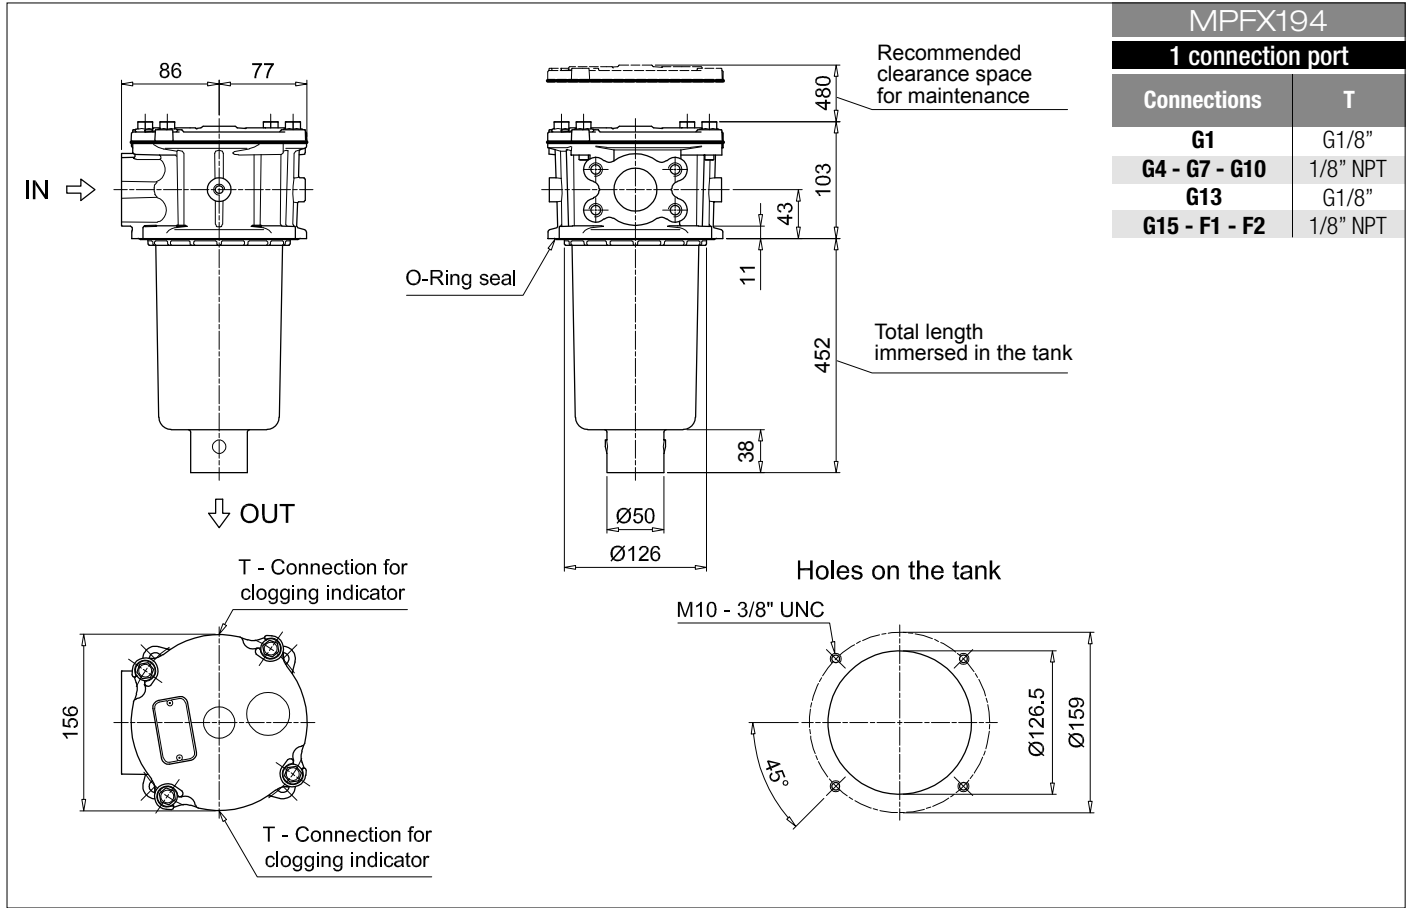



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>MPFX400</b>   <b>1</b>   <b>A</b>   <b>G9</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>																											
<b>MPFX400</b> Filter element with private spigot	Configuration example 2: <b>MPFX400</b>   <b>2</b>   <b>V</b>   <b>G4</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>																											
<b>Length</b>	1   2   3																											
<b>Seals and treatments</b>	<table border="0"> <tr><td><b>A</b></td><td>NBR</td></tr> <tr><td><b>V</b></td><td>FPM</td></tr> <tr><td><b>W</b></td><td>NBR head anodized</td></tr> <tr><td><b>Z</b></td><td>FPM head anodized</td></tr> </table>								<b>A</b>	NBR	<b>V</b>	FPM	<b>W</b>	NBR head anodized	<b>Z</b>	FPM head anodized												
<b>A</b>	NBR																											
<b>V</b>	FPM																											
<b>W</b>	NBR head anodized																											
<b>Z</b>	FPM head anodized																											
<b>Connections</b>	<table border="0"> <tr><td><b>G1</b></td><td>G1 1/4"</td><td><b>G6</b></td><td>2" NPT</td></tr> <tr><td><b>G2</b></td><td>G1 1/2"</td><td><b>G7</b></td><td>SAE 20 - 1 5/8" - 12 UN</td></tr> <tr><td><b>G3</b></td><td>G2"</td><td><b>G8</b></td><td>SAE 24 - 1 7/8" - 12 UN</td></tr> <tr><td><b>G4</b></td><td>1 1/4" NPT</td><td><b>G9</b></td><td>SAE 32 - 2 1/2" - 12 UN</td></tr> <tr><td><b>G5</b></td><td>1 1/2" NPT</td><td></td><td></td></tr> </table>								<b>G1</b>	G1 1/4"	<b>G6</b>	2" NPT	<b>G2</b>	G1 1/2"	<b>G7</b>	SAE 20 - 1 5/8" - 12 UN	<b>G3</b>	G2"	<b>G8</b>	SAE 24 - 1 7/8" - 12 UN	<b>G4</b>	1 1/4" NPT	<b>G9</b>	SAE 32 - 2 1/2" - 12 UN	<b>G5</b>	1 1/2" NPT		
<b>G1</b>	G1 1/4"	<b>G6</b>	2" NPT																									
<b>G2</b>	G1 1/2"	<b>G7</b>	SAE 20 - 1 5/8" - 12 UN																									
<b>G3</b>	G2"	<b>G8</b>	SAE 24 - 1 7/8" - 12 UN																									
<b>G4</b>	1 1/4" NPT	<b>G9</b>	SAE 32 - 2 1/2" - 12 UN																									
<b>G5</b>	1 1/2" NPT																											
<b>Filtration rating (filter media)</b>	<table border="0"> <tr><td><b>A03</b></td><td>Inorganic microfiber 3 µm</td><td><b>M25</b></td><td>Wire mesh 25 µm</td></tr> <tr><td><b>A06</b></td><td>Inorganic microfiber 6 µm</td><td><b>M60</b></td><td>Wire mesh 60 µm</td></tr> <tr><td><b>A10</b></td><td>Inorganic microfiber 10 µm</td><td><b>M90</b></td><td>Wire mesh 90 µm</td></tr> <tr><td><b>A16</b></td><td>Inorganic microfiber 16 µm</td><td><b>P10</b></td><td>Resin impregnated paper 10 µm</td></tr> <tr><td><b>A25</b></td><td>Inorganic microfiber 25 µm</td><td><b>P25</b></td><td>Resin impregnated paper 25 µm</td></tr> </table>								<b>A03</b>	Inorganic microfiber 3 µm	<b>M25</b>	Wire mesh 25 µm	<b>A06</b>	Inorganic microfiber 6 µm	<b>M60</b>	Wire mesh 60 µm	<b>A10</b>	Inorganic microfiber 10 µm	<b>M90</b>	Wire mesh 90 µm	<b>A16</b>	Inorganic microfiber 16 µm	<b>P10</b>	Resin impregnated paper 10 µm	<b>A25</b>	Inorganic microfiber 25 µm	<b>P25</b>	Resin impregnated paper 25 µm
<b>A03</b>	Inorganic microfiber 3 µm	<b>M25</b>	Wire mesh 25 µm																									
<b>A06</b>	Inorganic microfiber 6 µm	<b>M60</b>	Wire mesh 60 µm																									
<b>A10</b>	Inorganic microfiber 10 µm	<b>M90</b>	Wire mesh 90 µm																									
<b>A16</b>	Inorganic microfiber 16 µm	<b>P10</b>	Resin impregnated paper 10 µm																									
<b>A25</b>	Inorganic microfiber 25 µm	<b>P25</b>	Resin impregnated paper 25 µm																									
<b>Element Δp</b>	Filter media			Bypass valve		Execution																						
<b>N</b> 10 bar	Axx	Mxx	Pxx	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard																							
<b>H</b> 10 bar		•	•	<b>B</b> 1.75 bar	<b>Pxx</b> Customized																							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•																										


### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1: <b>MPFX400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b></b>   <b>P01</b>																											
<b>MPFX400</b> Filter element with private spigot	Configuration example 2: <b>MPFX400</b>   <b>2</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b>																											
<b>Element length</b>	1   2   3																											
<b>Filtration rating (filter media)</b>	<table border="0"> <tr><td><b>A03</b></td><td>Inorganic microfiber 3 µm</td><td><b>M25</b></td><td>Wire mesh 25 µm</td></tr> <tr><td><b>A06</b></td><td>Inorganic microfiber 6 µm</td><td><b>M60</b></td><td>Wire mesh 60 µm</td></tr> <tr><td><b>A10</b></td><td>Inorganic microfiber 10 µm</td><td><b>M90</b></td><td>Wire mesh 90 µm</td></tr> <tr><td><b>A16</b></td><td>Inorganic microfiber 16 µm</td><td><b>P10</b></td><td>Resin impregnated paper 10 µm</td></tr> <tr><td><b>A25</b></td><td>Inorganic microfiber 25 µm</td><td><b>P25</b></td><td>Resin impregnated paper 25 µm</td></tr> </table>								<b>A03</b>	Inorganic microfiber 3 µm	<b>M25</b>	Wire mesh 25 µm	<b>A06</b>	Inorganic microfiber 6 µm	<b>M60</b>	Wire mesh 60 µm	<b>A10</b>	Inorganic microfiber 10 µm	<b>M90</b>	Wire mesh 90 µm	<b>A16</b>	Inorganic microfiber 16 µm	<b>P10</b>	Resin impregnated paper 10 µm	<b>A25</b>	Inorganic microfiber 25 µm	<b>P25</b>	Resin impregnated paper 25 µm
<b>A03</b>	Inorganic microfiber 3 µm	<b>M25</b>	Wire mesh 25 µm																									
<b>A06</b>	Inorganic microfiber 6 µm	<b>M60</b>	Wire mesh 60 µm																									
<b>A10</b>	Inorganic microfiber 10 µm	<b>M90</b>	Wire mesh 90 µm																									
<b>A16</b>	Inorganic microfiber 16 µm	<b>P10</b>	Resin impregnated paper 10 µm																									
<b>A25</b>	Inorganic microfiber 25 µm	<b>P25</b>	Resin impregnated paper 25 µm																									
<b>Element Δp</b>	Filter media			Bypass valve		Execution																						
<b>N</b> 10 bar	Axx	Mxx	Pxx	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard																							
<b>H</b> 10 bar		•	•	<b>V</b> FPM	<b>Pxx</b> Customized																							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•																										

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
<b>Additional features</b>	page		
<b>T5</b> Filler plug M30x1.5	225		



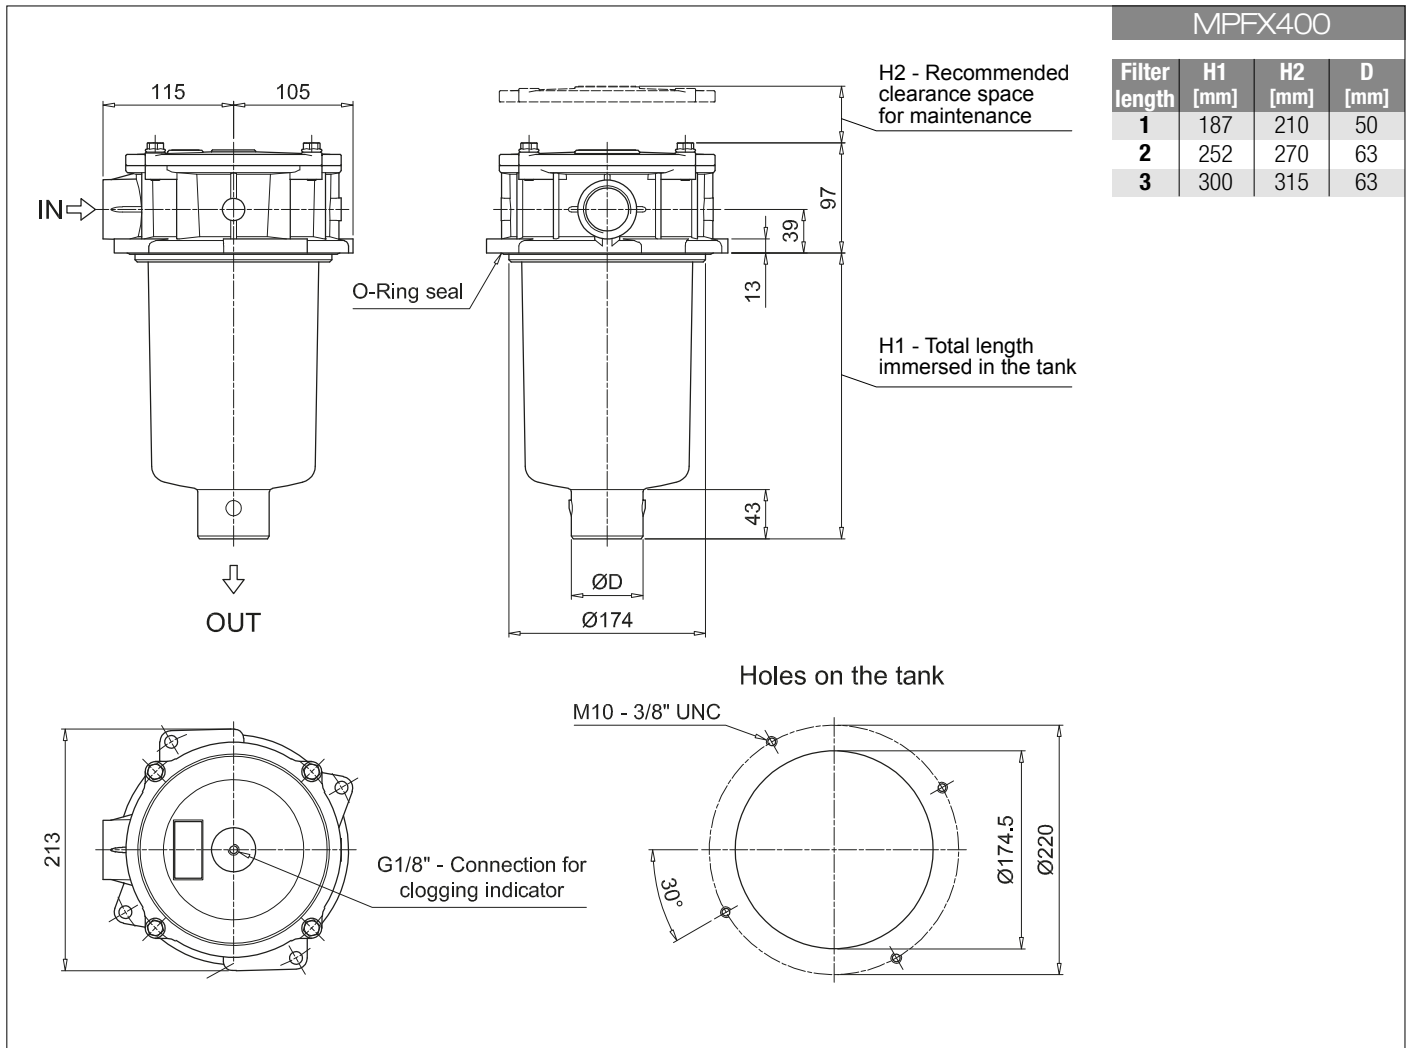

# MPFX MPFX410

## Designation & Ordering code

### COMPLETE FILTER


<b>Series and size</b>	Configuration example 1:	MPFX410	1	V	G4	1	P10	N	E	P01
<b>MPFX410</b> Filter element with private spigot	Configuration example 2:	MPFX410	1	A	G9	1	A25	H	B	P01
<b>Length</b>										
1   2   3										
<b>Seals and treatments</b>										
A NBR										
V FPM										
W NBR head anodized										
Z FPM head anodized										
<b>Main Connections</b>	<b>Aux size 1</b>									
G1 G1 1/4"	G1"									
G4 1 1/4" NPT	1" NPT									
G7 SAE 20 - 1 5/8" - 12 UN	SAE 16 - 1 5/16" - 12 UN									
<b>Aux connection</b> - see previous table										
1 Aux size 1										
<b>Filtration rating (filter media)</b>										
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm									
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm									
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm									
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm									
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm									
<b>Element Δp</b>	<b>Filter media</b>									
N 10 bar	Axx	Mxx	Pxx							
H 10 bar		•	•							
W 10 bar, compatible with fluids HFA, HFB and HFC	•	•								
				<b>Bypass valve</b>	<b>Execution</b>					
				E 3 bar	P01 MP Filtri standard					
				B 1.75 bar	Pxx Customized					

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1:	MFX400	1	P10	N	V	E	P01
<b>MFX400</b> Filter element with private spigot	Configuration example 2:	MFX400	1	A25	H	B		P01
<b>Element length</b>								
1   2   3								
<b>Filtration rating (filter media)</b>								
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm							
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm							
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm							
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm							
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm							
<b>Element Δp</b>	<b>Filter media</b>							
N 10 bar	Axx	Mxx	Pxx					
H 10 bar		•	•					
W 10 bar, compatible with fluids HFA, HFB and HFC	•	•						
			<b>Seals</b>	<b>Bypass valve</b>	<b>Execution</b>			
			B NBR	E 3 bar	P01 MP Filtri standard			
			V FPM	1.75 bar	Pxx Customized			

### ACCESSORIES

<b>Indicators</b>	page		page
BVA Axial pressure gauge	216	BEA Electrical pressure indicator	215
BVR Radial pressure gauge	216	BEM Electrical pressure indicator	215
BVP Visual pressure indicator with automatic reset	217	BLA Electrical / visual pressure indicator	215-216
BVQ Visual pressure indicator with manual reset	217		
<b>Additional features</b>	page		
T5 Filler plug M30x1.5	225		

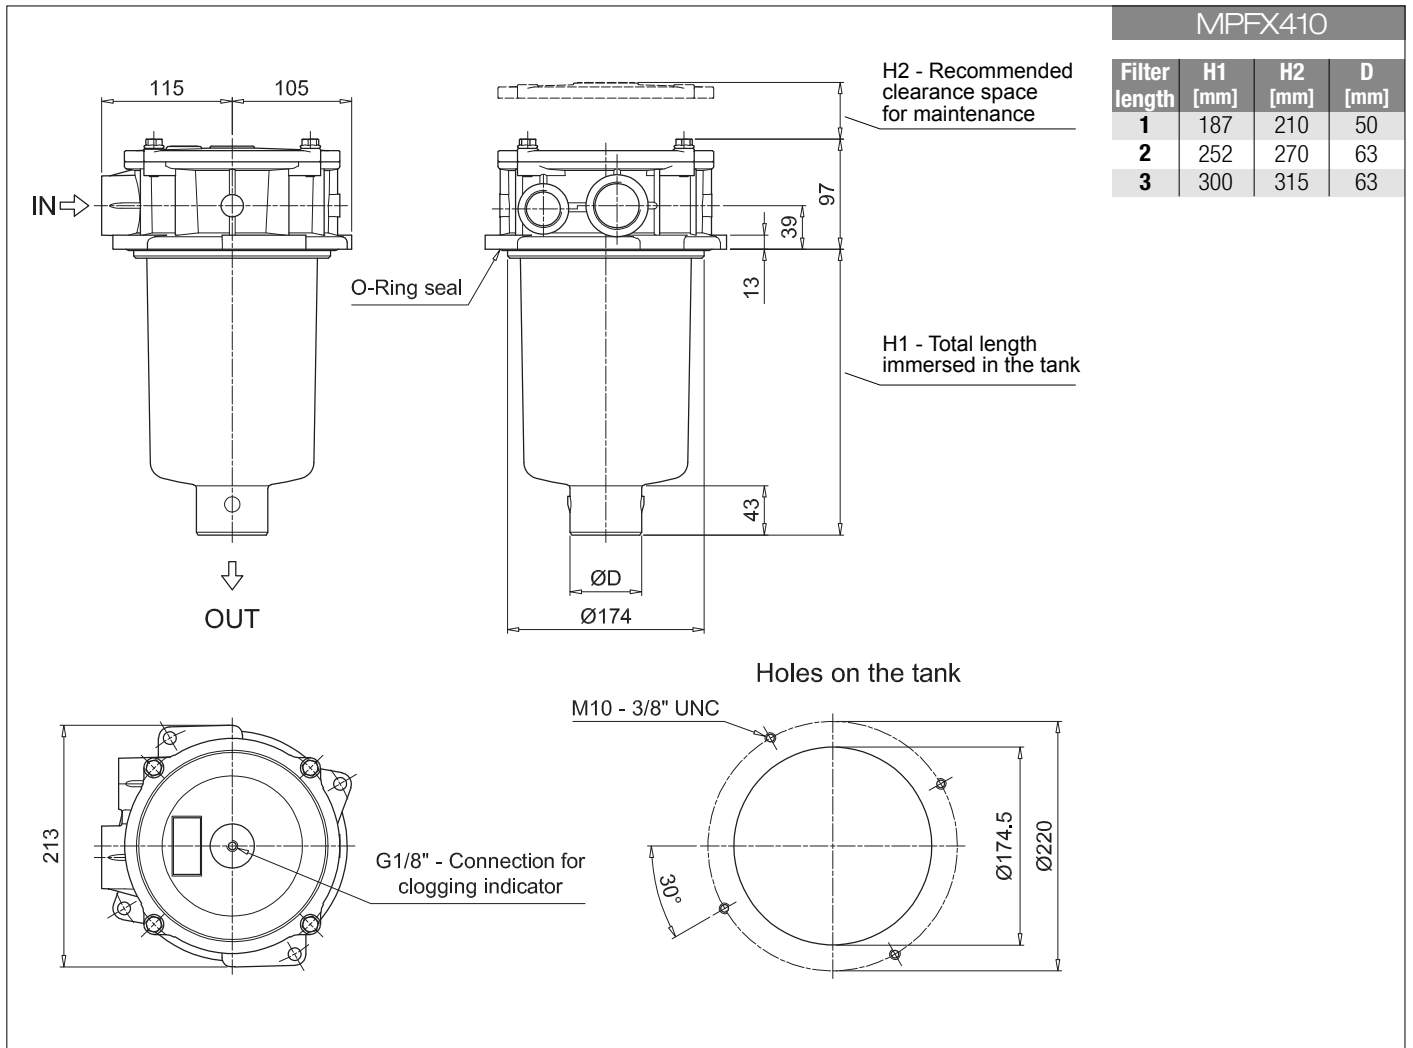

# MPFX MPFX450 - MPFX451 - MPFX750

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>				Configuration example 1: <b>MPFX450</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>								
<b>MPFX450   MPFX451   MPFX750</b> Filter element with private spigot				Configuration example 2: <b>MPFX750</b>   <b>1</b>   <b>V</b>   <b>F</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>								
<b>Length</b>		<b>MPFX 450</b>	<b>MPFX 451</b>	<b>MPFX 750</b>								
<b>1</b>		•	•	•								
<b>2</b>		•	•									
<b>3</b>		•	•									
<b>Seals and treatments</b>												
<b>A</b> NBR		<b>W</b> NBR head anodized										
<b>V</b> FPM		<b>Z</b> FPM head anodized										
<b>Connections</b>				<b>Aux (only size 451)</b>								
<b>G1</b> G2"		<b>G3/4"</b>										
<b>G4</b> 2" NPT		<b>3/4" NPT</b>										
<b>G7</b> SAE 32 - 2 1/2" - 12 UN		<b>SAE 12 - 1 1/16" - 12 UN</b>										
<b>F1</b> 2" SAE 3000 psi/M		<b>G3/4"</b>										
<b>F2</b> 2" SAE 3000 psi/UN		<b>3/4" NPT</b>										
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm										
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm										
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm										
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm										
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm										
				<b>Filter media</b>								
<b>Element Δp</b>		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>								
<b>N</b> 10 bar			•	•								
<b>H</b> 10 bar			•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•									
				<b>Bypass valve</b>		<b>Execution</b>						
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard						
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized						

### FILTER ELEMENT

<b>Element series and size</b>				Configuration example 1: <b>MFx400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>								
<b>MFx400   MFx750</b> Filter element with private spigot				Configuration example 2: <b>MFx750</b>   <b>1</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b>								
<b>Element length</b>		<b>MPFX 450</b>	<b>MPFX 451</b>	<b>MPFX 750</b>								
<b>1</b>		•	•	•								
<b>2</b>		•	•									
<b>3</b>		•	•									
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm										
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm										
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm										
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm										
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm										
				<b>Filter media</b>								
<b>Element Δp</b>		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>								
<b>N</b> 10 bar			•	•								
<b>H</b> 10 bar			•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•									
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>				
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard				
				<b>V</b> FPM		<b>1.75 bar</b>		<b>Pxx</b> Customized				

### ACCESSORIES





<b>Indicators</b>		page			page
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		page			
<b>T5</b> Filler plug M30x1.5		225			

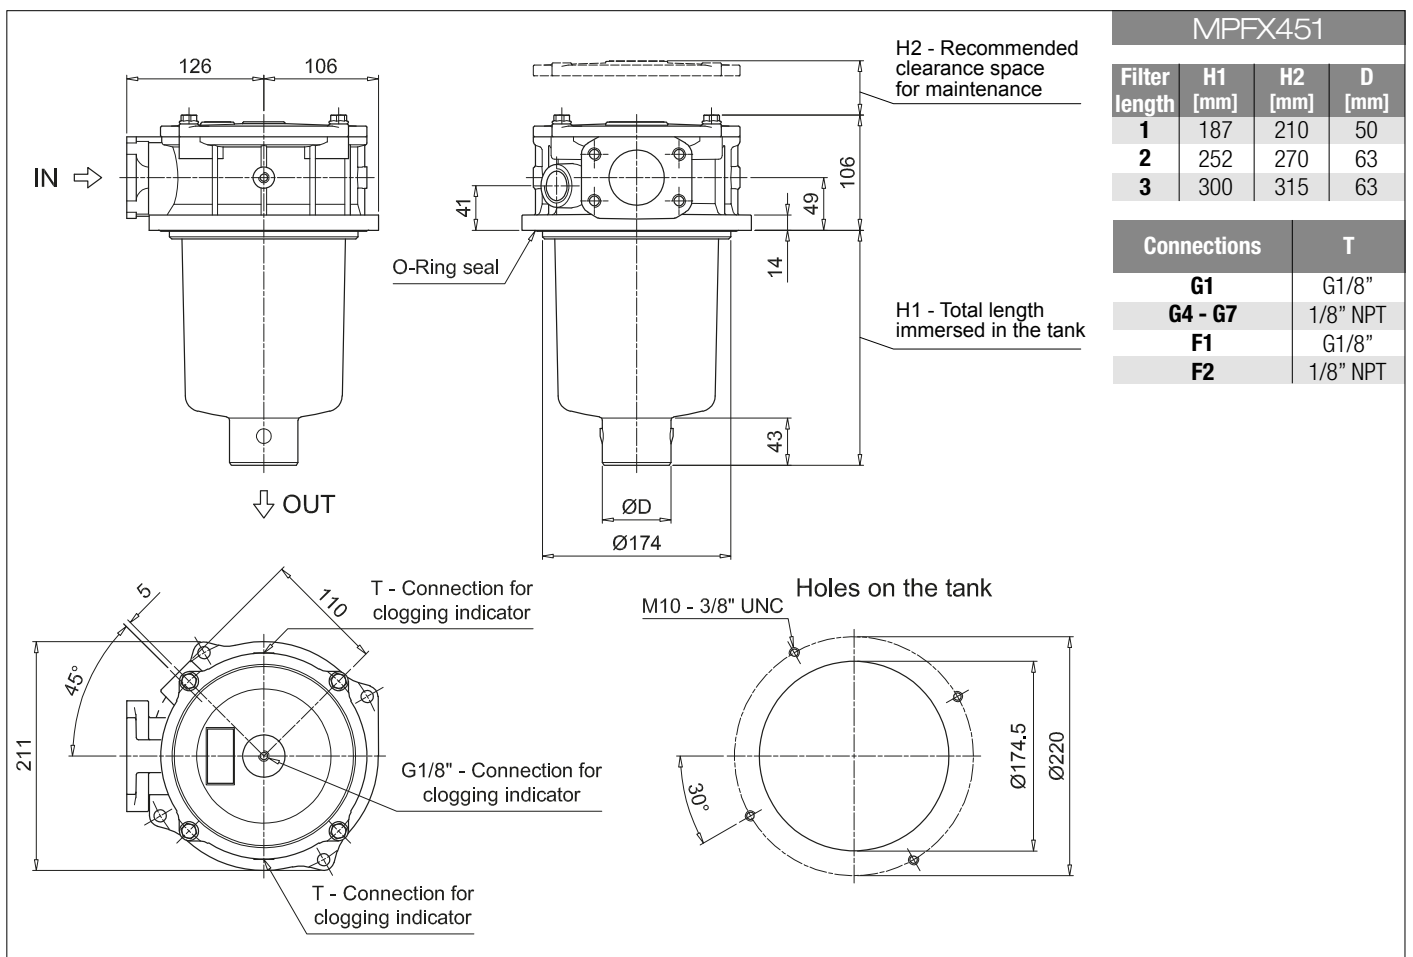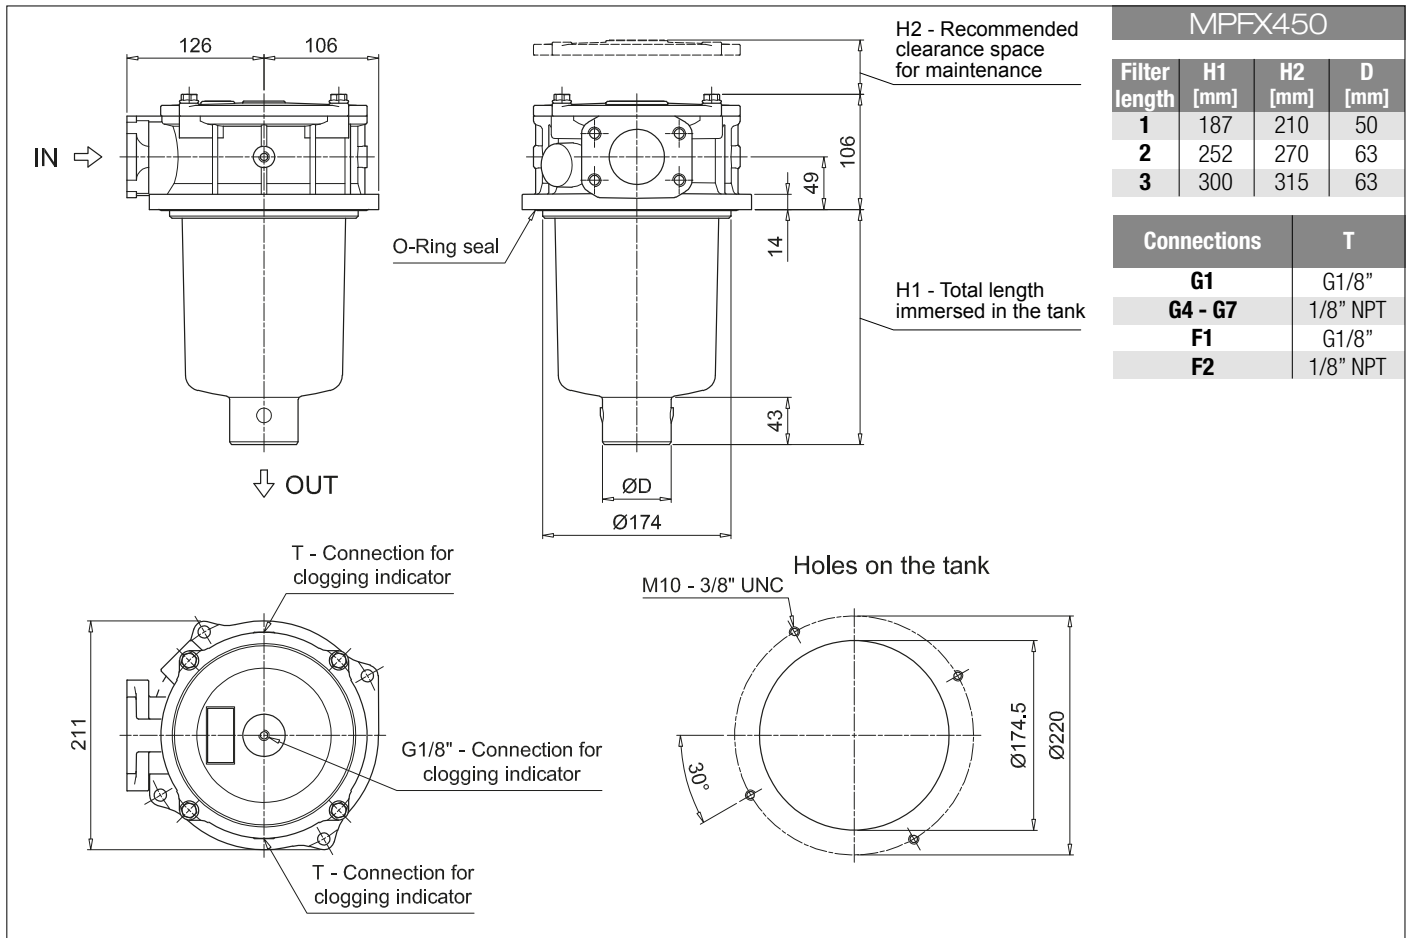

# MPFX MPFX450 - MPFX451 - MPFX750

## Dimensions

MPFX750

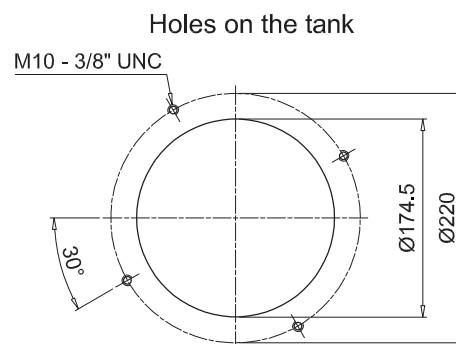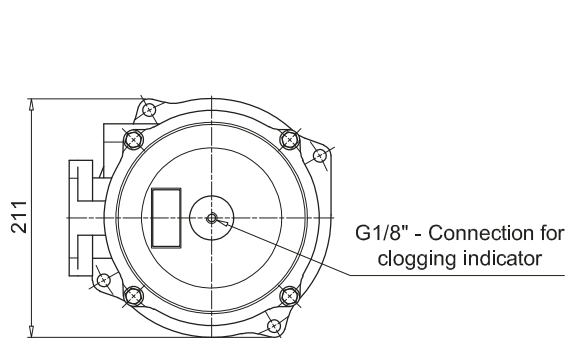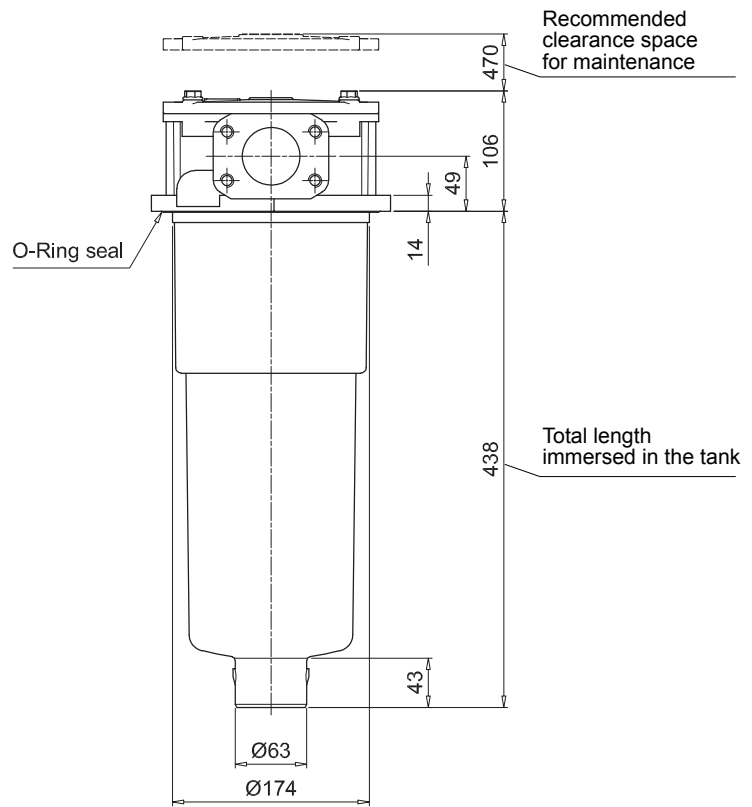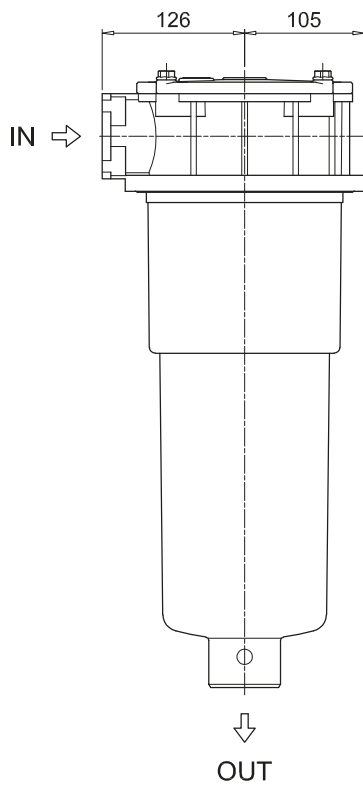

**MPFX 100**

**MPFX 181**

O-RING SEAL			
	Q.ty: 1 pc.	Q.ty: 1 pc.	
Item:	<b>2</b>	<b>3</b> (3a ÷ 3d)	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
<b>MPFX 030</b>	See order table	02050675	02050676
<b>MPFX 100-110</b>		02050677	02050678
<b>MPFX 181-182</b>		02050681	02050682
<b>MPFX 184</b>		02050685	02050686
<b>MPFX 191-192</b>		02050683	02050684
<b>MPFX 194</b>		02050687	02050688
<b>MPFX 400-410</b>		02050695	02050696
<b>MPFX 450-451</b>		02050697	02050698
<b>MPFX 750</b>		02050699	02050700

**MPFX 104**

**MPFX 181**

FLAT SEAL			
	Q.ty: 1 pc.	Q.ty: 1 pc.	
Item:	<b>2</b>	<b>3</b> (3a ÷ 3d)	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
<b>MPFX 104</b>	See order table	02050679	02050680
<b>MPFX 181-182</b>		02050691	02050692
<b>MPFX 191-192</b>		02050693	02050694





# MPTX series

Maximum pressure up to 8 bar - Flow rate up to 300 l/min



## Technical data

**Return filter** Maximum pressure up to 8 bar - Flow rate up to 300 l/min

### Filter housing materials

- Head: Aluminium
- Cover: Nylon
- Bowl: Nylon

### Seals

- Standard NBR series A
- Optional FPM series V

### Pressure

Working pressure: 800 kPa (8 bar)

### Temperature

From -25 °C to +110 °C

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)
- Opening pressure 300 kPa (3 bar)

### Note

MPTX filters are provided for vertical mounting

### Δp element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN.

## Weights [kg] and volumes [dm<sup>3</sup>]






	Weights [kg]					Volumes [dm <sup>3</sup> ]				
	Length	1	2	3	4	Length	1	2	3	4
<b>MPTX 025</b>		0.41	0.45	0.50	-		0.24	0.35	0.42	-
<b>MPTX 027</b>		0.44	0.48	0.55	-		0.24	0.35	0.42	-
<b>MPTX 101</b>		1.00	1.05	1.15	1.40		0.72	0.93	1.28	1.74
<b>MPTX 104</b>		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74
<b>MPTX 110-120</b>		1.00	1.05	1.15	1.40		0.72	0.93	1.28	1.74
<b>MPTX 114</b>		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.



$\Delta p$  varies proportionally with density.

Pressure drop

Filter housings  $\Delta p$  pressure drop

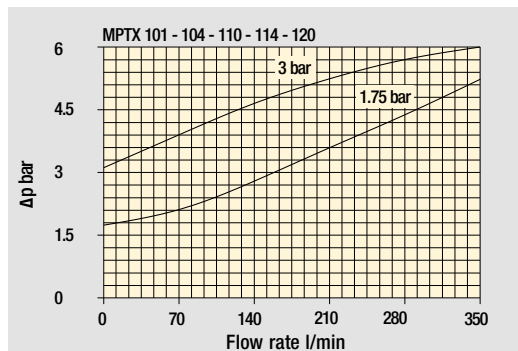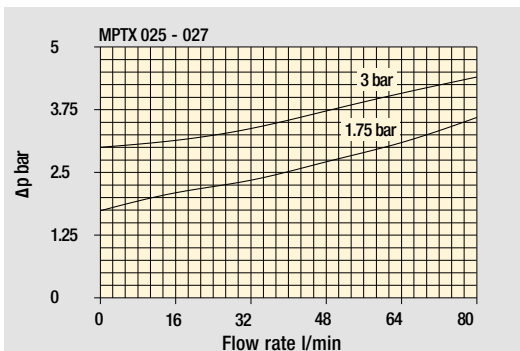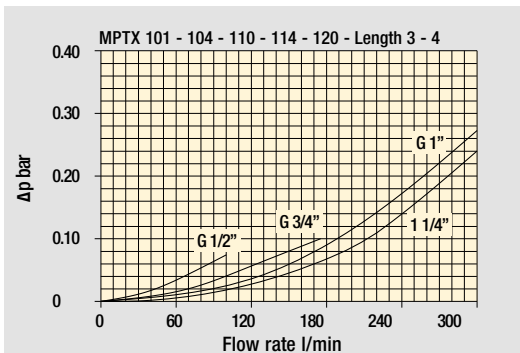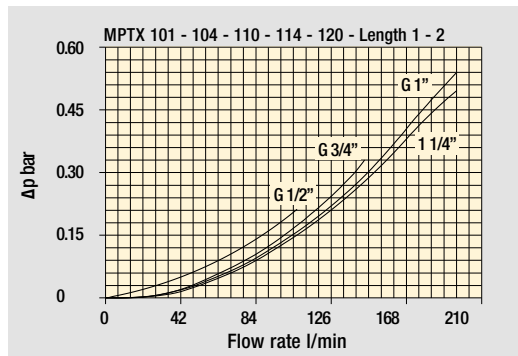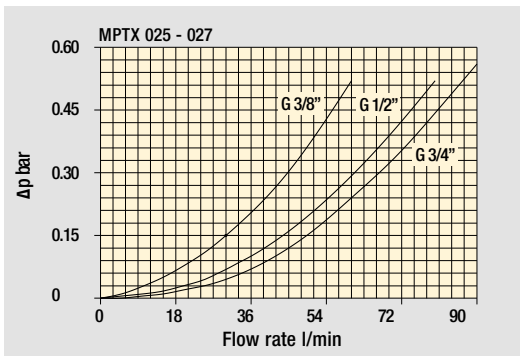


Bypass valve pressure drop

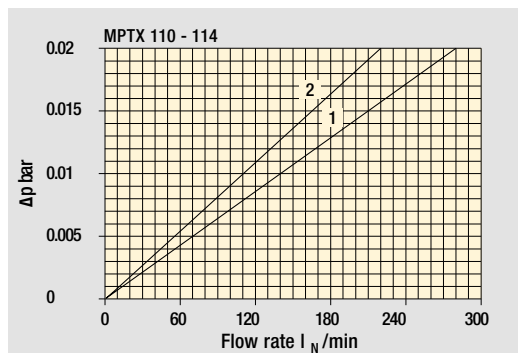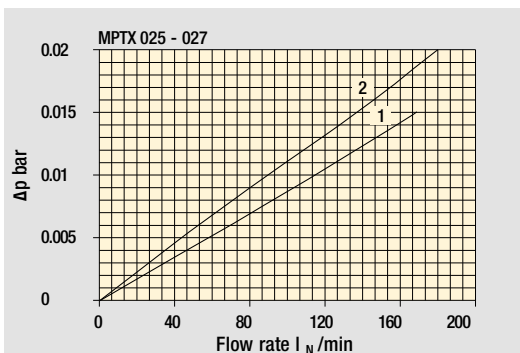

Air breather pressure drop

- 1  C With air breather 10  $\mu$ m
- 2  D With anti-splash and SAP50 10  $\mu$ m

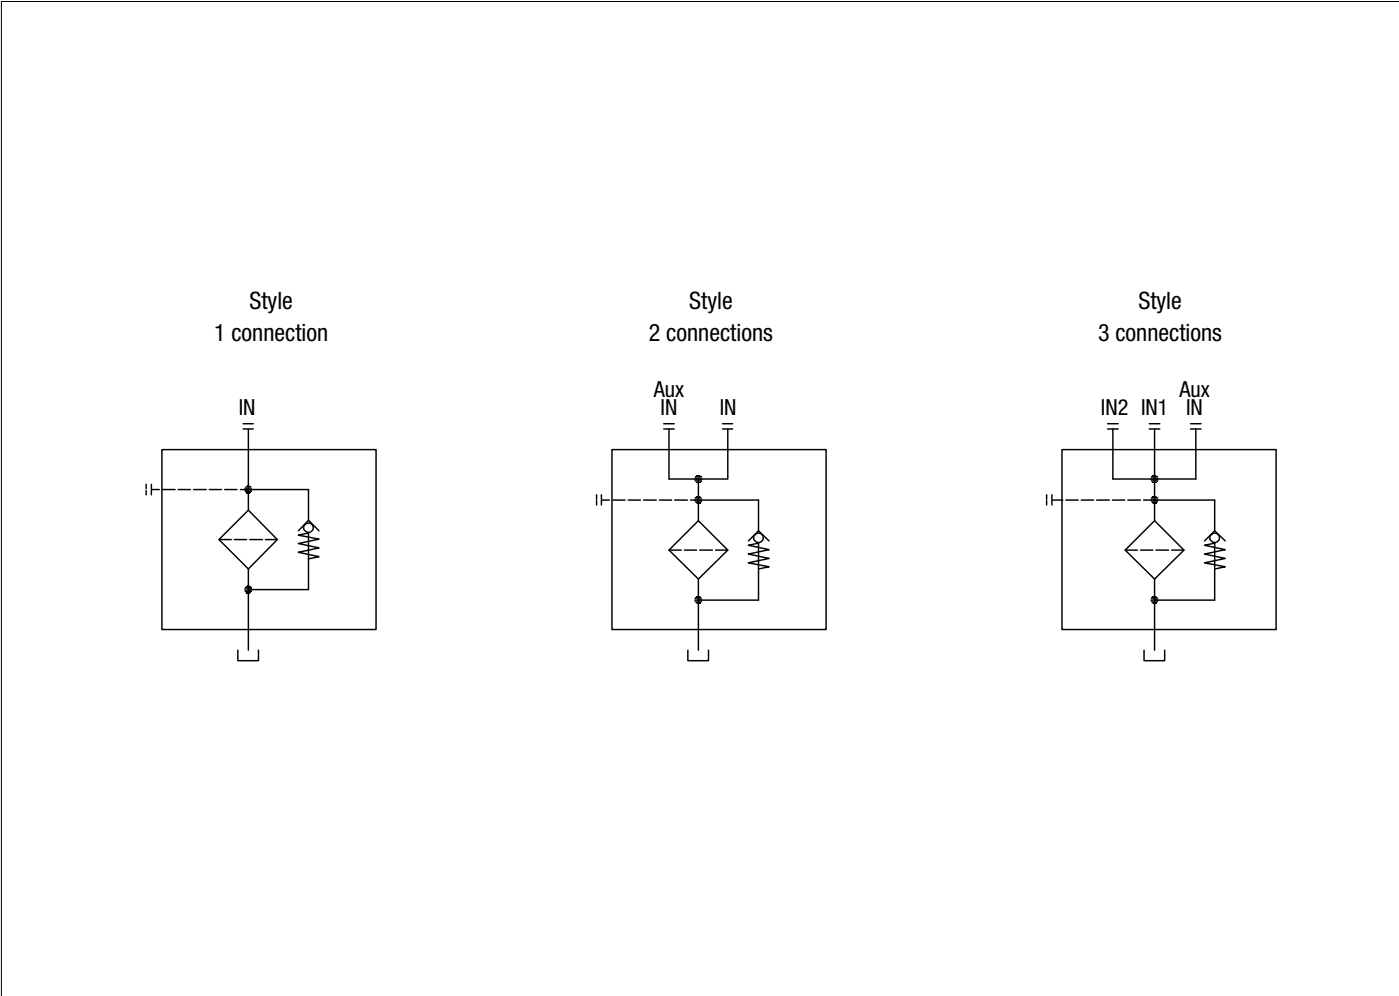

### Multifunction

#### MPT 025 -027

Air breather port plugged  
Indicator port



Air breather standard  
Indicator port



Anti-splash air breather & pressurized  
Double indicator port



### Multiport - Multifunction

#### MPT 110

Standard - Single IN Port



Double IN Port - Double indicator port



Double IN Port - Indicator port



Option:  
drain port

Double IN Port



Option:  
double drain port

#### MPT 120

Triple IN port



Option:  
double drain port

# MPTX MPTX025 - MPTX027

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b> <b>MPTX025   MPTX027</b> Filter element with private spigot	Configuration example 1: <b>MPTX025</b>   <b>1</b>   <b>S</b>   <b>A</b>   <b>G3</b>   <b>A10</b>   <b>E</b>   <b>P01</b>
	Configuration example 2: <b>MPTX027</b>   <b>3</b>   <b>C</b>   <b>W</b>   <b>G6</b>   <b>A03</b>   <b>B</b>   <b>P01</b>
<b>Length</b> <b>1</b>   <b>2</b>   <b>3</b>	
<b>Air breather</b> <b>S</b> Without air breather <b>C</b> With air breather 10 µm <b>D</b> With anti-splash and air breather SAP050 10 µm <b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar	
<b>Seals and treatments</b>	<b>Filtration rating</b>
<b>A</b> NBR	<b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>
<b>V</b> FPM	•   •   •
<b>W</b> NBR head anodized filter element compatible with fluids HFA-HFB-HFC	•   •   •
<b>Z</b> FPM head anodized	•   •   •
<b>Connections</b>	
<b>G1</b> G3/8"   <b>G6</b> 3/4" NPT	
<b>G2</b> G1/2"   <b>G7</b> SAE 6 - 9/16" - 18 UNF	
<b>G3</b> G3/4"   <b>G8</b> SAE 8 - 3/4" - 16 UNF	
<b>G4</b> 3/8" NPT   <b>G9</b> SAE 12 - 1 1/16" - 12 UN	
<b>G5</b> 1/2" NPT	
<b>Filtration rating (filter media)</b>	
<b>A03</b> Inorganic microfiber 3 µm   <b>M25</b> Wire mesh 25 µm	
<b>A06</b> Inorganic microfiber 6 µm   <b>M60</b> Wire mesh 60 µm	
<b>A10</b> Inorganic microfiber 10 µm   <b>M90</b> Wire mesh 90 µm	
<b>A16</b> Inorganic microfiber 16 µm   <b>P10</b> Resin impregnated paper 10 µm	
<b>A25</b> Inorganic microfiber 25 µm   <b>P25</b> Resin impregnated paper 25 µm	
	<b>Bypass valve</b> <b>E</b> 3 bar <b>B</b> 1.75 bar
	<b>Execution</b> <b>P01</b> MP Filtri standard <b>Pxx</b> Customized

### FILTER ELEMENT

<b>Element series and size</b> <b>MFXX020</b> Filter element with private spigot	Configuration example 2: <b>MFXX020</b>   <b>1</b>   <b>A10</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>
	Configuration example 1: <b>MFXX020</b>   <b>3</b>   <b>A03</b>   <b>H</b>   <b>W</b>   <b>P01</b>
<b>Element length</b> <b>1</b>   <b>2</b>   <b>3</b>	
<b>Filtration rating (filter media)</b>	
<b>A03</b> Inorganic microfiber 3 µm   <b>M25</b> Wire mesh 25 µm	
<b>A06</b> Inorganic microfiber 6 µm   <b>M60</b> Wire mesh 60 µm	
<b>A10</b> Inorganic microfiber 10 µm   <b>M90</b> Wire mesh 90 µm	
<b>A16</b> Inorganic microfiber 16 µm   <b>P10</b> Resin impregnated paper 10 µm	
<b>A25</b> Inorganic microfiber 25 µm   <b>P25</b> Resin impregnated paper 25 µm	
<b>Element Δp</b>	<b>Filter media</b>
<b>N</b> 10 bar	<b>Axx</b>   <b>Mxx</b>   <b>Pxx</b>
<b>H</b> 10 bar	•   •   •
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•   •   •
	<b>Seals</b> <b>B</b> NBR <b>V</b> FPM
	<b>Bypass valve</b> <b>E</b> 3 bar <b>B</b> 1.75 bar
	<b>Execution</b> <b>P01</b> MP Filtri standard <b>Pxx</b> Customized

### ACCESSORIES

<b>Indicators</b>	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
<b>Additional features</b>	page		
<b>TE</b> Extension tube	224		
<b>DPT</b> Dipstick	225		

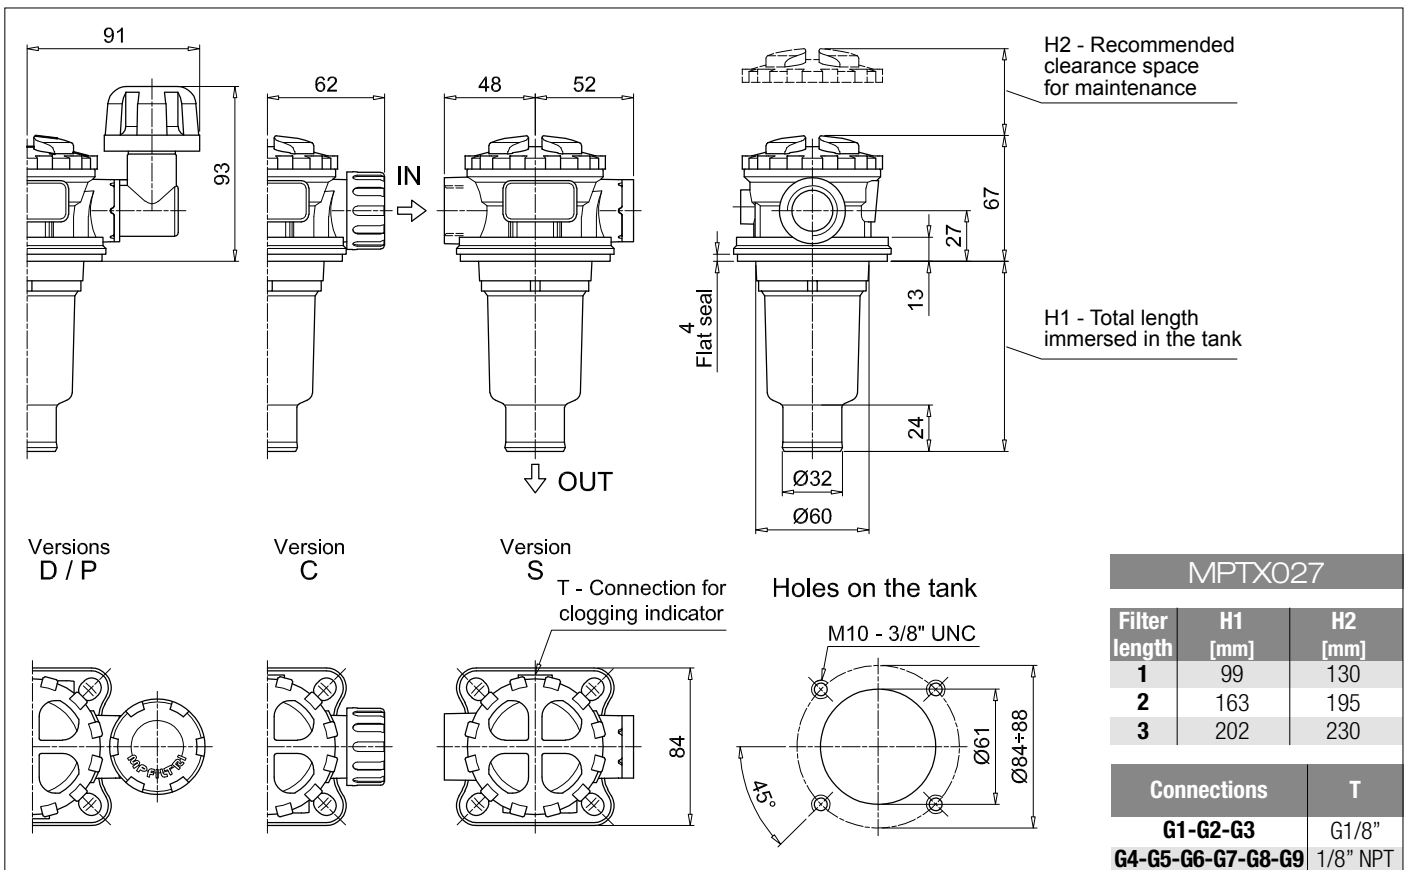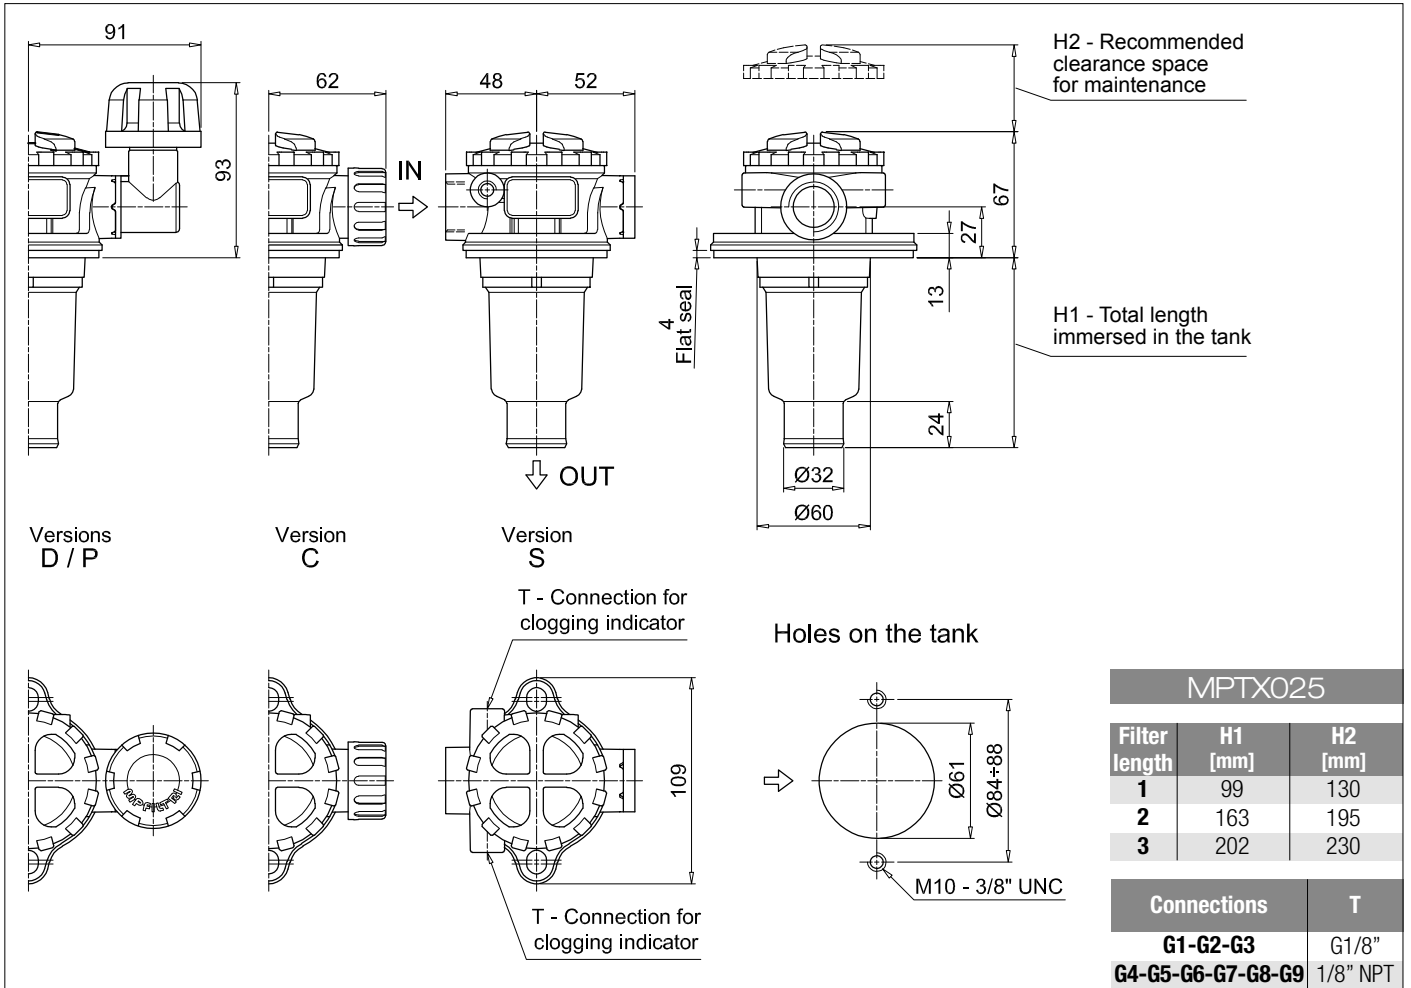

# MPTX MPTX101 - MPTX104 - MPTX114

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>MPTX101</b>   <b>4</b>   <b>S</b>   <b>A</b>   <b>G3</b>   <b>A10</b>   <b>E</b>   <b>P01</b>							
<b>MPTX101   MPTX104   MPTX114</b> Filter element with private spigot	Configuration example 2: <b>MPTX114</b>   <b>3</b>   <b>C</b>   <b>W</b>   <b>G6</b>   <b>A03</b>   <b>B</b>   <b>P01</b>							
<b>Length</b>	1   2   3   4							
<b>Air breather</b>	MPTX101	MPTX104	MPTX114					
<b>S</b> Without air breather	•	•	•					
<b>C</b> With air breather 10 µm			•					
<b>D</b> With anti-splash and air breather SAPO50 10 µm			•					
<b>P</b> With anti-splash and air breather SAPO50 10 µm pressurization 0.5 bar			•					
<b>Seals and treatments</b>	Filtration rating							
	Axx	Mxx	Pxx					
<b>A</b> NBR	•	•	•					
<b>V</b> FPM	•	•	•					
<b>W</b> NBR head anodized	•	•		filter element compatible with fluids HFA-HFB-HFC				
<b>Z</b> FPM head anodized	•	•						
<b>Connections</b>								
<b>G1</b> G3/4"	<b>G6</b> 1 1/4" NPT							
<b>G2</b> G1"	<b>G7</b> SAE 12 - 1 1/16" - 12 UN							
<b>G3</b> G1 1/4"	<b>G8</b> SAE 16 - 1 5/16" - 12 UN							
<b>G4</b> 3/4" NPT	<b>G9</b> SAE 20 - 1 5/8" - 12 UN							
<b>G5</b> 1" NPT								
<b>Filtration rating (filter media)</b>								
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm							
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm							
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm							
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm							
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm							
	<b>Bypass valve</b>	<b>Execution</b>						
	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard						
	<b>B</b> 1.75 bar	<b>Pxx</b> Customized						


### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 2: <b>MFX100</b>   <b>4</b>   <b>A10</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>							
<b>MFX100</b> Filter element with private spigot	Configuration example 1: <b>MFX100</b>   <b>3</b>   <b>A03</b>   <b>W</b>   <b>B</b>   <b></b>   <b>P01</b>							
<b>Element length</b>	1   2   3   4							
<b>Filtration rating (filter media)</b>								
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm							
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm							
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm							
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm							
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm							
<b>Element Δp</b>	Filter media							
	Axx	Mxx	Pxx					
<b>N</b> 10 bar		•	•					
<b>H</b> 10 bar	•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•						
	<b>Seals</b>	<b>Bypass valve</b>	<b>Execution</b>					
	<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard					
	<b>V</b> FPM	1.75 bar	<b>Pxx</b> Customized					

### ACCESSORIES

<b>Indicators</b>	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
<b>Additional features</b>	page		page
<b>TE</b> Extension tube	224	<b>DPT</b> Dipstick	225
<b>DFS</b> Diffuser with fast lock connection	225		




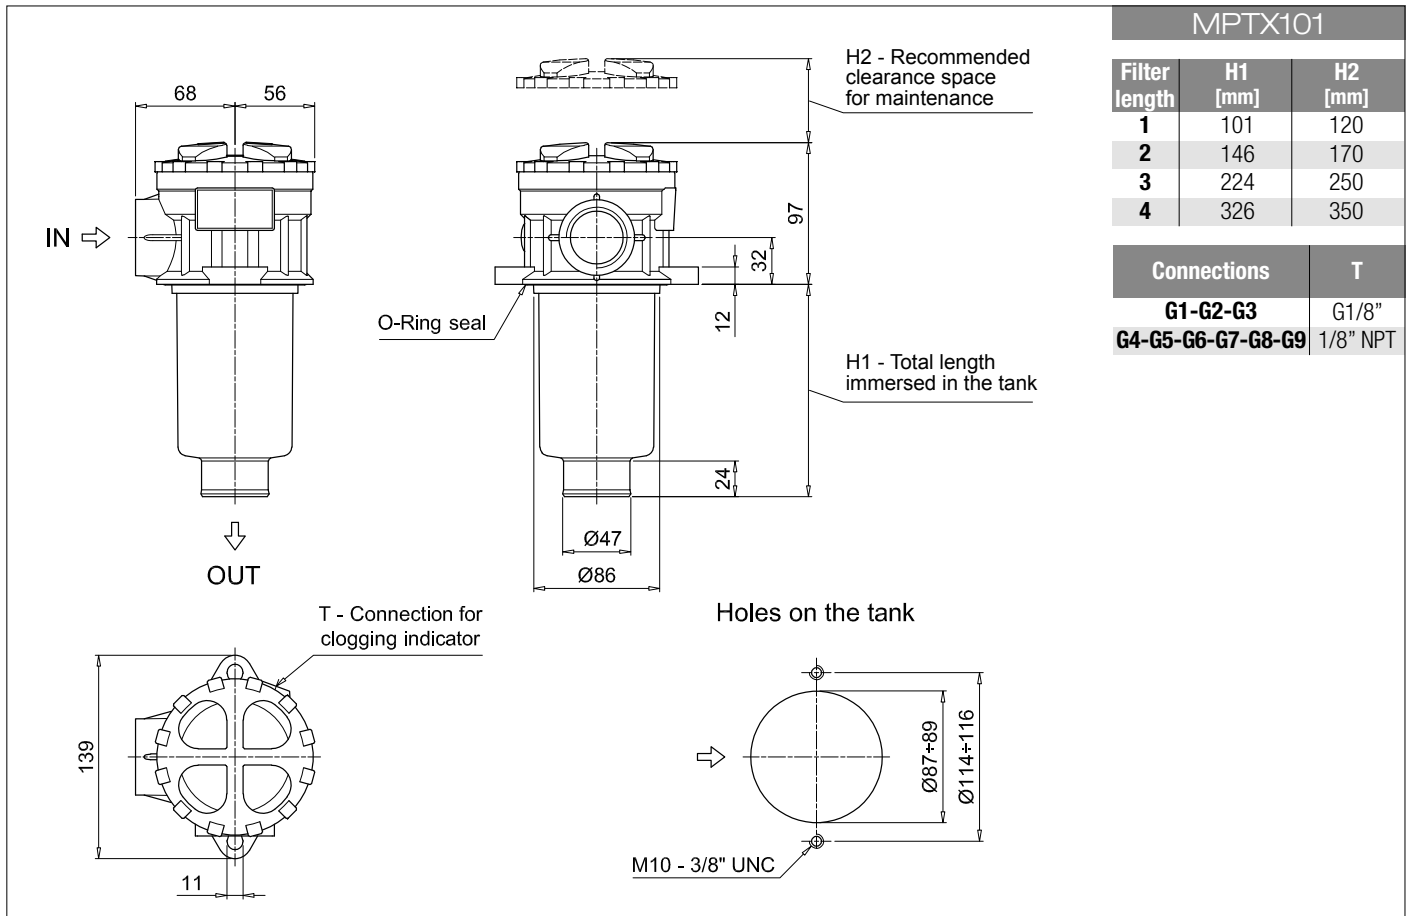

MPTX101		
Filter length	H1 [mm]	H2 [mm]
1	101	120
2	146	170
3	224	250
4	326	350

Connections	T
G1-G2-G3	G1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT

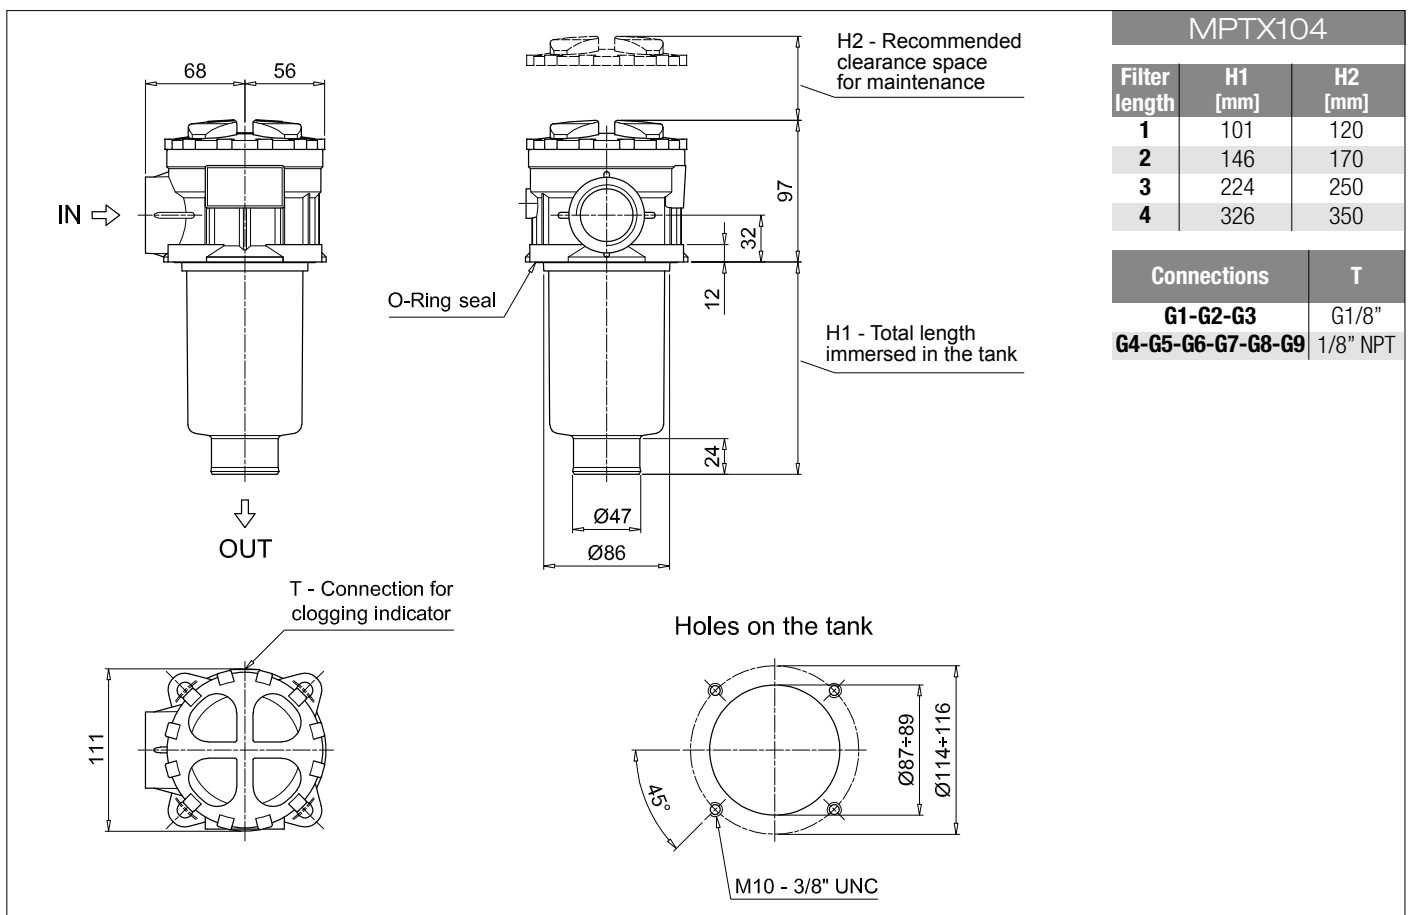

MPTX104		
Filter length	H1 [mm]	H2 [mm]
1	101	120
2	146	170
3	224	250
4	326	350

Connections	T
G1-G2-G3	G1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT


# MPTX MPTX101 - MPTX104 - MPTX114

## Dimensions


### MPTX114

Filter length	H1 [mm]	H2 [mm]
<b>1</b>	99	120
<b>2</b>	144	170
<b>3</b>	222	250
<b>4</b>	324	350


Connections	T
<b>G1-G2-G3</b>	G1/8"
<b>G4-G5-G6-G7-G8-G9</b>	1/8" NPT

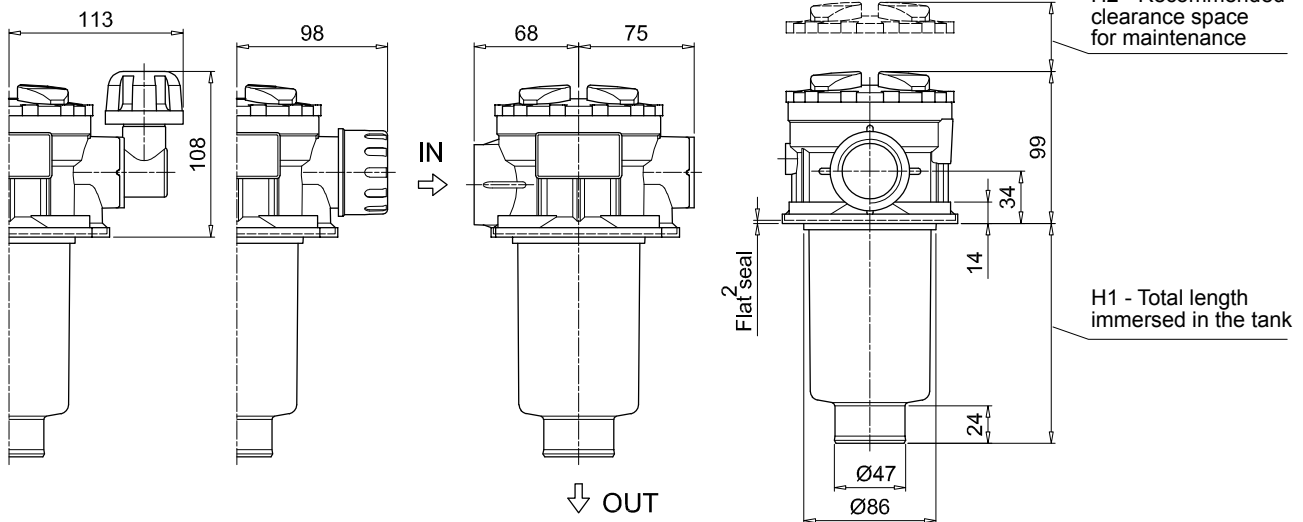


Versions D / P




Version C



Version S T - Connection for clogging indicator

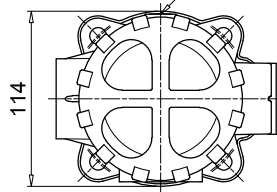

Holes on the tank

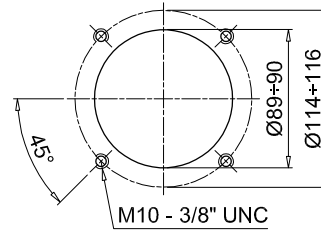



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>		Configuration example 1: <b>MPTX110</b> <b>3</b> <b>P</b> <b>V</b> <b>G4</b> <b>1</b> <b>M25</b> <b>B</b> <b>P01</b>									
<b>MPTX110</b> Filter element with private spigot		Configuration example 2: <b>MPTX110</b> <b>1</b> <b>S</b> <b>A</b> <b>G1</b> <b>0</b> <b>A06</b> <b>E</b> <b>P01</b>									
<b>Length</b>											
<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>											
<b>Air breather</b>											
<b>S</b> Without air breather											
<b>C</b> With air breather 10 µm											
<b>D</b> With anti-splash and air breather SAP050 10 µm											
<b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar											
<b>Seals and treatments</b>		Filtration rating									
		Axx   Mxx   Pxx									
<b>A</b> NBR		• • •									
<b>V</b> FPM		• • •									
<b>W</b> NBR head anodized		• •									
<b>Z</b> FPM head anodized		• •									
		filter element compatible with fluids HFA-HFB-HFC									
<b>Main Connections</b>		<b>Aux size 1</b>		<b>Aux size 2</b>		<b>Main Connections</b>		<b>Aux size 2</b>		<b>Aux size 2</b>	
<b>G1</b> G3/4"		G3/8"		G1/2"		<b>G6</b> 1 1/4" NPT		3/8" NPT		1/2" NPT	
<b>G2</b> G1"						<b>G7</b> SAE 12 - 1 1/16" - 12 UN		SAE 6 - 9/16" - 18 UNF		SAE 8 - 3/4" - 16 UNF	
<b>G3</b> G1 1/4"						<b>G8</b> SAE 16 - 1 5/16" - 12 UN					
<b>G4</b> 3/4" NPT		3/8" NPT		1/2" NPT		<b>G9</b> SAE 20 - 1 5/8" - 12 UN					
<b>G5</b> 1" NPT											
<b>Aux connection</b> - see previous table											
<b>0</b> Not machined		<b>1</b> Aux size 1		<b>2</b> Aux size 2							
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
		<b>Bypass valve</b>									
		<b>E</b> 3 bar									
		<b>B</b> 1.75 bar									
		<b>Execution</b>									
		<b>P01</b> MP Filtri standard									
		<b>Pxx</b> Customized									

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MFX100</b> <b>3</b> <b>M25</b> <b>N</b> <b>V</b> <b></b> <b>P01</b>									
<b>MFX100</b> Filter element with private spigot		Configuration example 2: <b>MFX100</b> <b>1</b> <b>A06</b> <b>H</b> <b>B</b> <b>E</b> <b>P01</b>									
<b>Element length</b>											
<b>1</b>   <b>2</b>   <b>3</b>   <b>4</b>											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		Filter media									
		Axx   Mxx   Pxx									
<b>N</b> 10 bar		• • •									
<b>H</b> 10 bar		•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		• •									
		<b>Seals</b>									
		<b>B</b> NBR									
		<b>V</b> FPM									
		<b>Bypass valve</b>									
		<b>E</b> 3 bar									
		<b>B</b> 1.75 bar									
		<b>Execution</b>									
		<b>P01</b> MP Filtri standard									
		<b>Pxx</b> Customized									


### ACCESSORIES

<b>Indicators</b>		page		page	
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215		
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215		
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216		
<b>BVQ</b> Visual pressure indicator with manual reset	217				
<b>Additional features</b>		page		page	
<b>TE</b> Extension tube	224	<b>DPT</b> Dipstick	225		
<b>DFS</b> Diffuser with fast lock connection	225				

MPTX110		
Filter length	H1 [mm]	H2 [mm]
<b>1</b>	99	120
<b>2</b>	144	170
<b>3</b>	222	250
<b>4</b>	324	350

Connections	T
<b>G1-G2-G3</b>	G1/8"
<b>G4-G5-G6-G7-G8-G9</b>	1/8" NPT

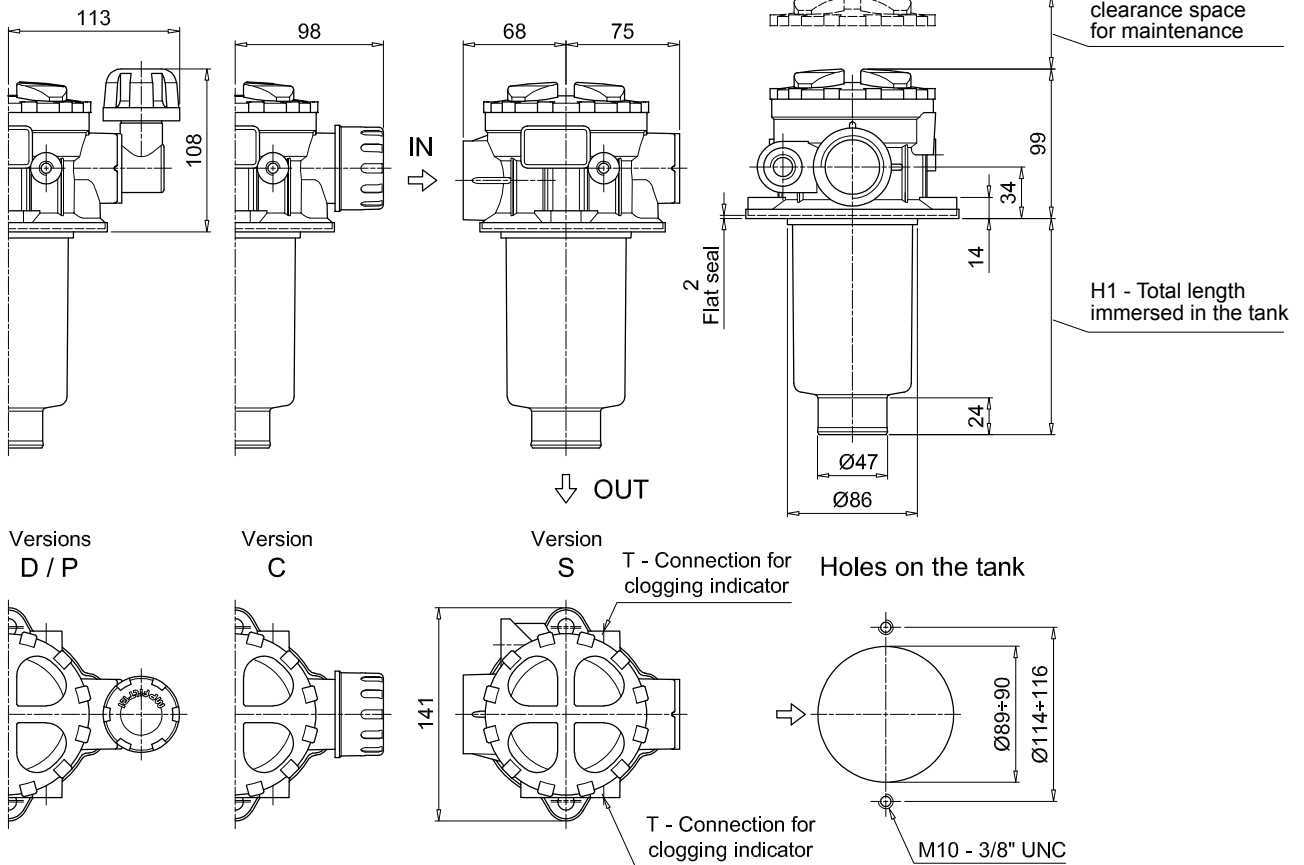

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1:	MPTX120	3	V	G4	1	M25	B	P01
<b>MPTX120</b> Filter element with private spigot	Configuration example 2:	MPTX120	1	A	G1	0	A06	E	P01

<b>Length</b>	
1   2   3   4	

Seals and treatments	Filtration rating		
	Axx	Mxx	Pxx
<b>A</b> NBR	•	•	•
<b>V</b> FPM	•	•	•
<b>W</b> NBR head anodized	•	•	
<b>Z</b> FPM head anodized	•	•	

Main Connections	Rear connections	Aux size 1	Aux size 2
<b>G1</b> G3/4"	G3/4"	G3/8"	G1/2"
<b>G2</b> G1"	G1"		
<b>G3</b> G1 1/4"	G3/4"		
<b>G4</b> 3/4" NPT	3/4" NPT	3/8" NPT	1/2" NPT
<b>G5</b> 1" NPT	1" NPT		
<b>G6</b> 1 1/4" NPT	3/4" NPT	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF
<b>G7</b> SAE 12 - 1 1/16" - 12 UN	SAE 12 - 1 1/16" - 12 UN		
<b>G8</b> SAE 16 - 1 5/16" - 12 UN	SAE 16 - 1 5/16" - 12 UN		
<b>G9</b> SAE 20 - 1 5/8" - 12 UN	SAE 12 - 1 1/16" - 12 UN		

<b>Aux connection</b> - see previous table
0 Not machined   1 Aux size 1   2 Aux size 2

Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Bypass valve	Execution
<b>E</b> 3 bar	<b>P01</b> MP Filtri standard
<b>B</b> 1.75 bar	<b>Pxx</b> Customized

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1:	MFX100	3	M25	N	V		P01
<b>MFX100</b> Filter element with private spigot	Configuration example 2:	MFX100	1	A10	H	B	E	P01

<b>Element length</b>	
1   2   3   4	


Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Element Δp	Filter media		
	Axx	Mxx	Pxx
<b>N</b> 10 bar		•	•
<b>H</b> 10 bar	•		
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•	

Seals	Bypass valve	Execution
<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard
<b>V</b> FPM	1.75 bar	<b>Pxx</b> Customized

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		page
<b>TE</b> Extension tube	224	<b>DPT</b> Dipstick	225
<b>DFS</b> Diffuser with fast lock connection	225		

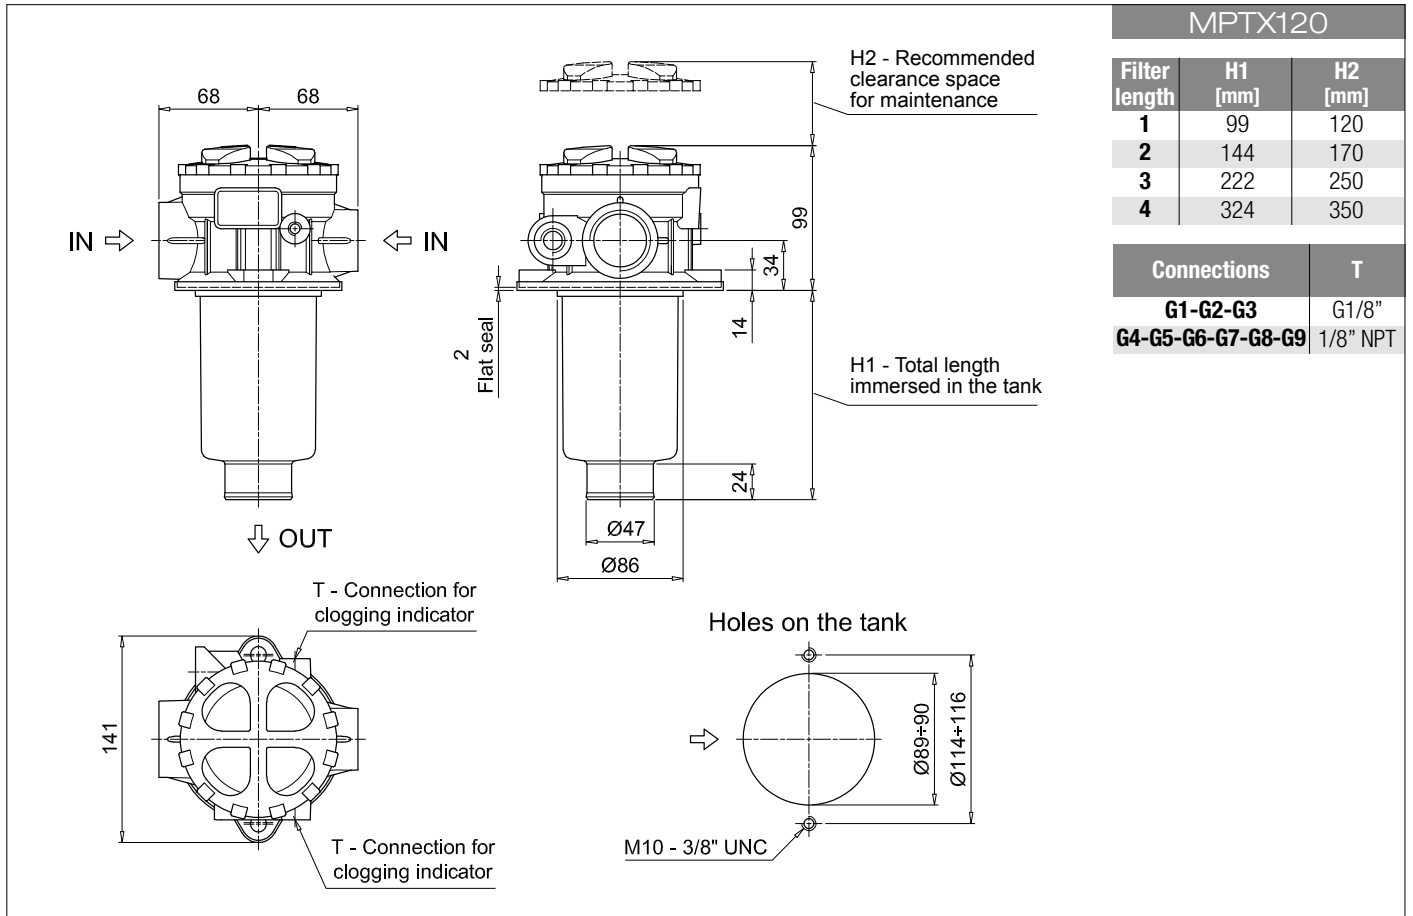

MPTX120		
Filter length	H1 [mm]	H2 [mm]
1	99	120
2	144	170
3	222	250
4	324	350


  

Connections	T
G1-G2-G3	G1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT


# MPTX SPARE PARTS

Order number for spare parts

MPTX 025 - 027 - 110

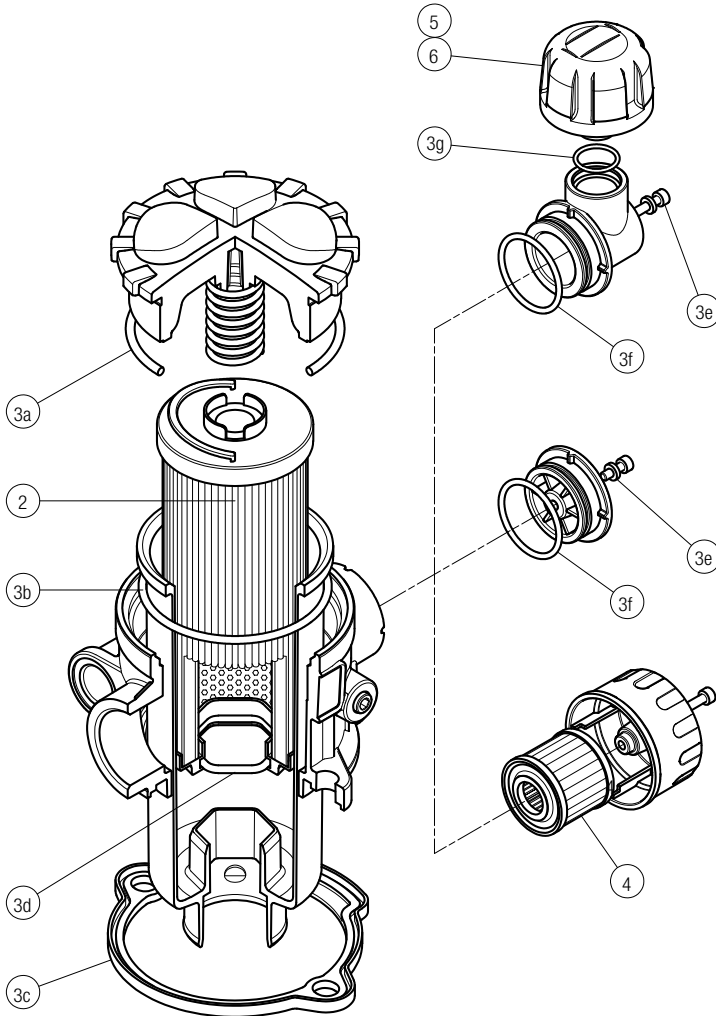



MPTX 101S - 104S

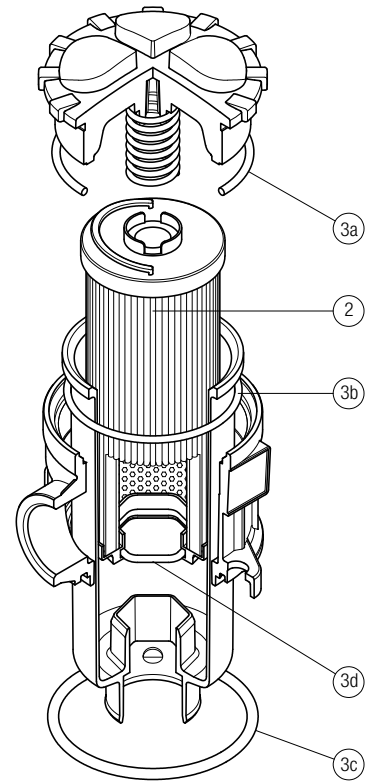

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number	Air breather filter element - version:			
		NBR	FPM	C	D	P
MPTX 025	See order table	02050701	02050702	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01
MPTX 027		02050703	02050704	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01
MPTX 110		02050709	02050710	10 µm A5L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
MPTX 101S-104S	See order table	02050705	02050706



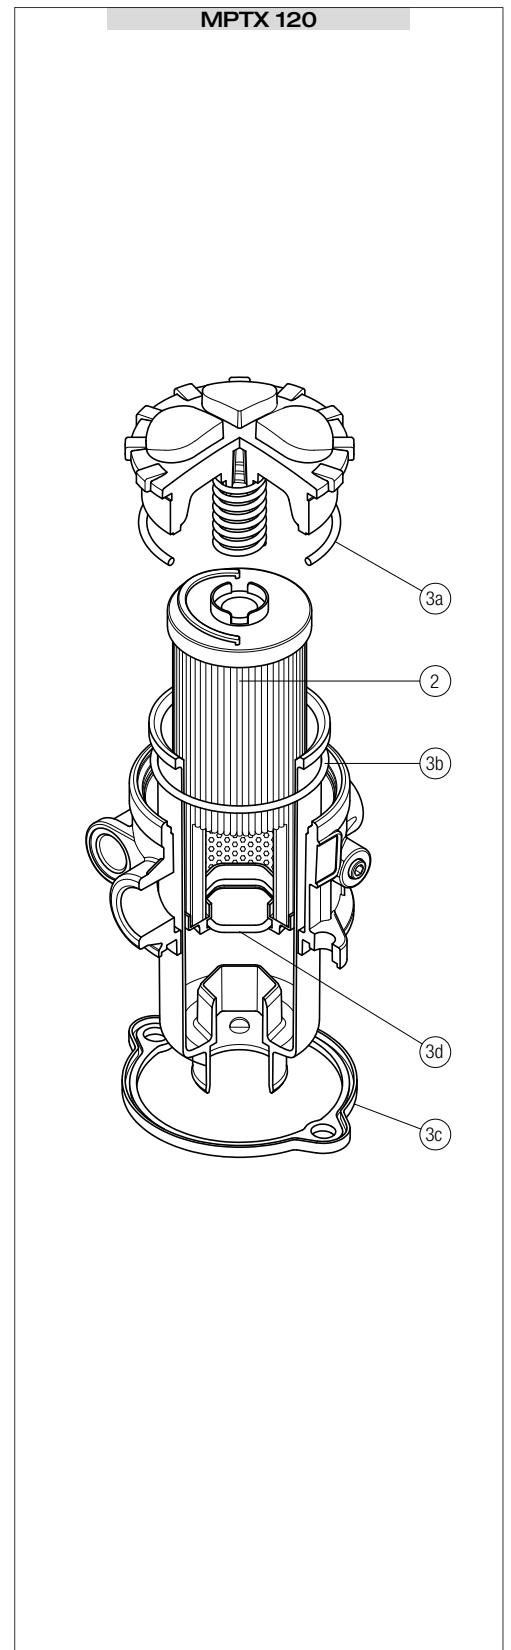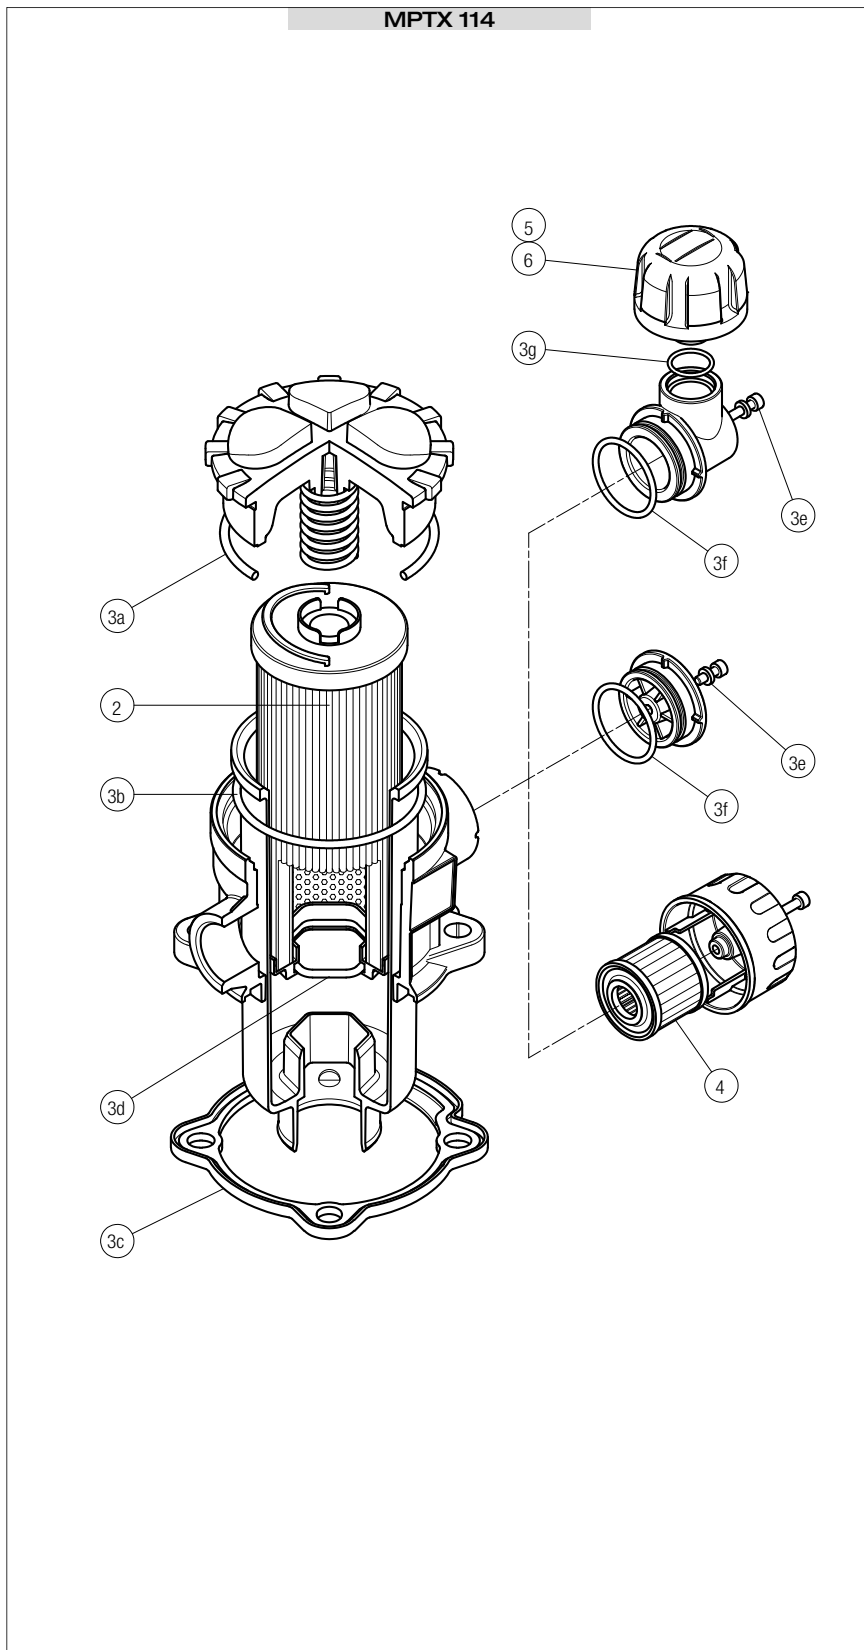

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	
	2	3 (3a ÷ 3g)	4	5	6	
<b>Filter series</b>		<b>Seal Kit code number</b>		<b>Air breather filter element - version:</b>		
	<b>Filter element</b>	<b>NBR</b>	<b>FPM</b>	<b>C</b>	<b>D</b>	<b>P</b>
<b>MPTX 114</b>	See order table	02050707	02050708	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µmm SAP50G3L03A1P01

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
	2	3 (3a ÷ 3d)	
<b>Filter series</b>		<b>Seal Kit code number</b>	
	<b>Filter element</b>	<b>NBR</b>	<b>FPM</b>
<b>MPTX 120</b>	See order table	02050711	02050712



# MFBX series

BOWL ASSEMBLY



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>						Configuration example 1: <b>MFBX180</b>   <b>2</b>   <b>V</b>   <b>1</b>   <b>M25</b>   <b>H</b>   <b>B</b>   <b>P01</b>							
<b>MFBX020</b>   <b>MFBX030</b>   <b>MFBX100</b>   <b>MFBX180</b>   <b>MFBX190</b>						Configuration example 2: <b>MFBX100</b>   <b>1</b>   <b>A</b>   <b>2</b>   <b>A10</b>   <b>N</b>   <b>E</b>   <b>P01</b>							
Filter element with private spigot													
<b>Length</b>	MFBX020	MFBX030	MFBX100	MFBX180	MFBX190								
1	•	•	•	•									
2	•		•	•	•								
3	•		•										
4			•										
<b>Seals</b>													
<b>A</b> NBR													
<b>V</b> FPM													
<b>Version</b>													
<b>1</b> Without cover													
<b>2</b> With flanged cover type MPF													
<b>3</b> With threaded cover type MPT													
<b>Filtration rating (filter media)</b>													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
<b>Element Δp</b>													
<b>N</b> 10 bar													
<b>H</b> 10 bar													
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC													
										<b>Bypass valve</b>			
										<b>E</b> 3 bar			
										<b>B</b> 1.75 bar			
										<b>Execution</b>			
										<b>P01</b> MP Filtri standard			
										<b>Pxx</b> Customized			


### FILTER ELEMENT

<b>Element series and size</b>						Configuration example 1: <b>MFX180</b>   <b>2</b>   <b>M25</b>   <b>H</b>   <b>V</b>   <b></b>   <b>P01</b>							
<b>MFX020</b>   <b>MFX030</b>   <b>MFX100</b>   <b>MFX180</b>						Configuration example 2: <b>MFX100</b>   <b>1</b>   <b>A10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b>							
Filter element with private spigot													
<b>Element length</b>	MFX020	MFX030	MFX100	MFX180	MFX190								
1	•	•	•	•									
2	•		•	•	•								
3	•		•										
4			•										
<b>Filtration rating (filter media)</b>													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
<b>Element Δp</b>													
<b>N</b> 10 bar													
<b>H</b> 10 bar													
										<b>Seals</b>			
										<b>B</b> NBR			
										<b>V</b> FPM			
										<b>Bypass valve</b>			
										<b>E</b> 3 bar			
										<b>B</b> 1.75 bar			
										<b>Execution</b>			
										<b>P01</b> MP Filtri standard			
										<b>Pxx</b> Customized			



### ACCESSORIES

<b>Additional features</b>											page
						MFBX020	MFBX030	MFBX100	MFBX180	MFBX190	
<b>TE</b>	Extension tube	•	•	•	•	•					224
<b>DFS</b>	Diffuser with fast lock connection			•							225



MFBX

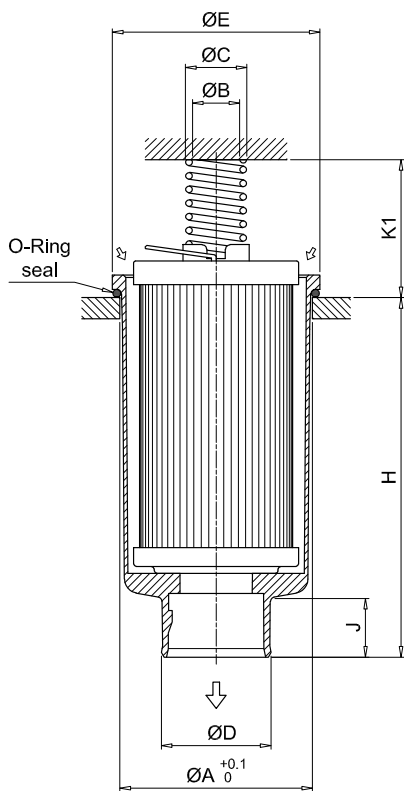


Version 1

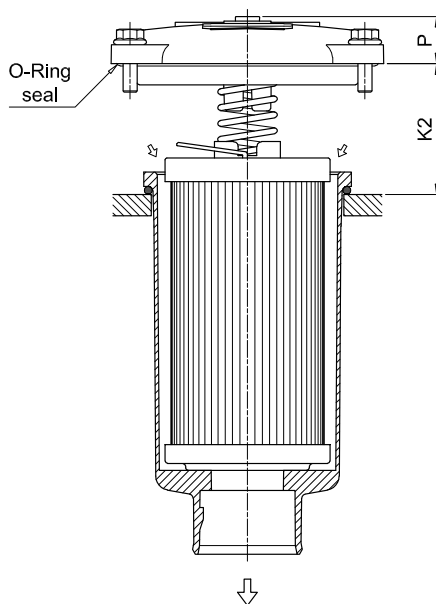

Version 2

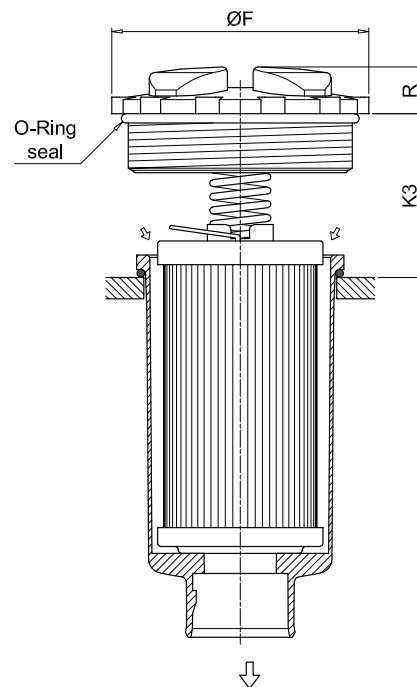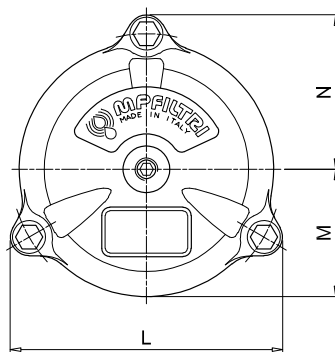


Version 3

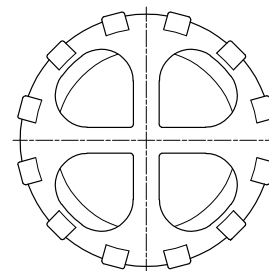


Filter size	Filter length	ø A [mm]	ø B [mm]	ø C [mm]	ø D [mm]	ø E [mm]	ø F [mm]	H [mm]	J [mm]	K1 [mm]	K2 [mm]	K3 [mm]	L [mm]	M [mm]	N [mm]	P [mm]	R [mm]
020	1	52	20.5	26	32	56	75	111	24	42	-	36	-	-	-	-	18
	2	52	20.5	26	32	56	75	175	24	42	-	36	-	-	-	-	18
	3	52	20.5	26	32	56	75	214	24	42	-	36	-	-	-	-	18
030	1	60.5	20	25.5	32	68	-	93	21	33	35	-	92	42	52	18	-
100	1	80.5	20	26	47	88	111	109	24	58	55	69	116	54	66	20	20
	2	80.5	20	26	47	88	111	154	24	58	55	69	116	54	66	20	20
	3	80.5	20	26	47	88	111	232	24	58	55	69	116	54	66	20	20
	4	80.5	20	26	47	88	111	334	24	58	55	69	116	54	66	20	20
180	1	112.5	26	33.5	47	121	-	234	31	58	69	-	159	76	95	21	-
	2	112.5	26	33.5	47	121	-	447	31	58	69	-	159	76	95	21	-
190	2	112.5	26	33.5	50	121	-	454	38	58	69	-	159	76	95	21	-

# MFBX GENERAL INFORMATION

## Hydraulic symbol

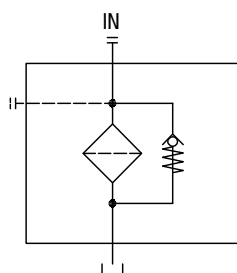

## Order number for spare parts

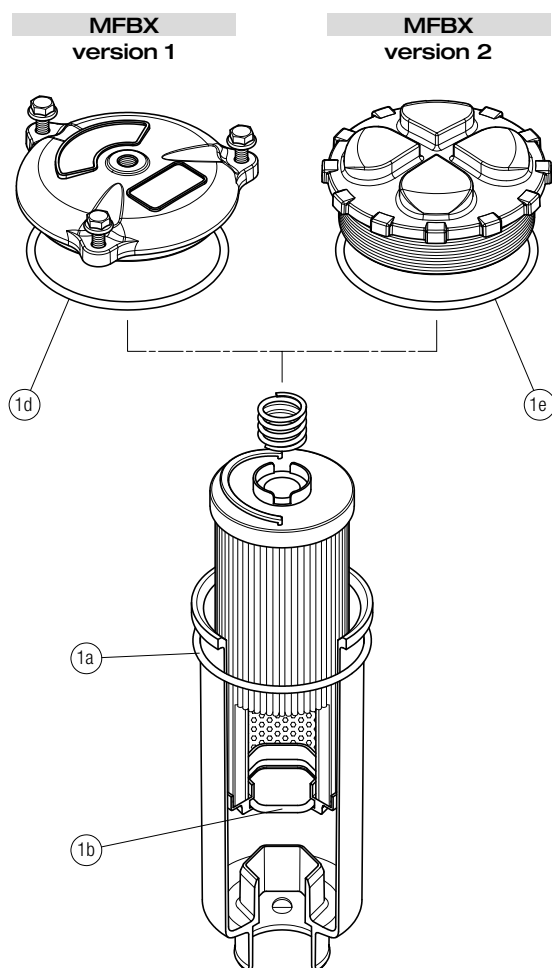

Q.ty: 1 pc.		
Item:	1 (1a ÷ 1d)	
Filter series	Seal Kit code number	
	NBR	FPM
<b>MFBX 020</b>	02050713	02050714
<b>MFBX 030</b>	02050715	02050716
<b>MFBX 100</b>	02050717	02050718
<b>MFBX 180-190</b>	02050719	02050720







# MPF series

Maximum pressure up to 8 bar - Flow rate up to 750 l/min



## Technical data

**Return filter** Maximum pressure up to 8 bar - Flow rate up to 750 l/min

### Filter housing materials

- Head: Aluminium
- Cover: Nylon (only for: MPF 020-030-100-104-110)  
Aluminium (the other insert assemblies)
- Bowl: Nylon

### Seals

- Standard NBR series A
- Optional FPM series V

### Pressure

Working pressure: up to 800 kPa (8 bar)

### Temperature

From -25 °C to +110 °C

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)
- Opening pressure 300 kPa (3 bar)

### Note

MPF filters are provided for vertical mounting

### Δp element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN.

## Weights [kg] and volumes [dm<sup>3</sup>]











	Weights [kg]				Volumes [dm <sup>3</sup> ]					
	Lenght	1	2	3	4	Lenght	1	2	3	4
<b>MPF 020</b>		0.30	-	-	-		0.26	-	-	-
<b>MPF 030</b>		0.40	-	-	-		0.29	-	-	-
<b>MPF 100</b>		0.61	0.64	0.67	0.74		0.64	0.85	1.20	1.65
<b>MPF 104</b>		0.82	0.96	1.02	1.25		0.64	0.85	1.20	1.65
<b>MPF 110</b>		0.64	0.68	0.71	0.78					
<b>MPF 181</b>		2.20	3.00	-	-		2.50	4.00	-	-
<b>MPF 182</b>		2.30	3.10	-	-		2.50	4.00	-	-
<b>MPF 184</b>		2.55	3.45	-	-		2.65	4.45	-	-
<b>MPF 191</b>		-	3.00	-	-		-	4.25	-	-
<b>MPF 192</b>		-	3.10	-	-		-	4.25	-	-
<b>MPF 194</b>		-	3.45	-	-		-	4.45	-	-
<b>MPF 400</b>		3.35	3.65	3.90	-		3.70	4.60	5.40	-
<b>MPF 410</b>		3.55	3.85	4.10	-		3.70	4.60	5.40	-
<b>MPF 450-451</b>		3.95	4.25	4.50	-		3.70	4.60	5.40	-
<b>MPF 750</b>		6.30	-	-	-		8.45	-	-	-

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.

$\Delta p$  varies proportionally with density.


Pressure drop

Filter housings  $\Delta p$  pressure drop

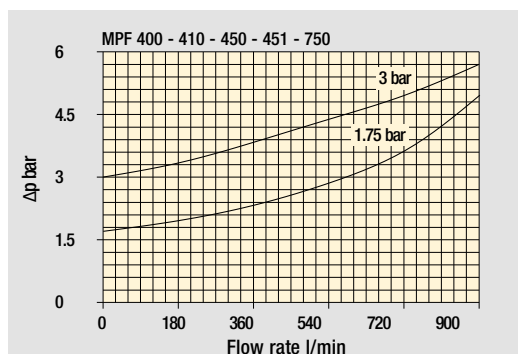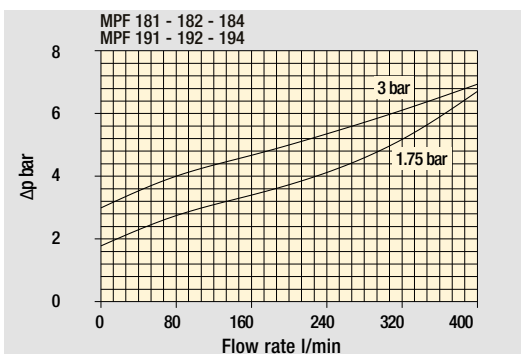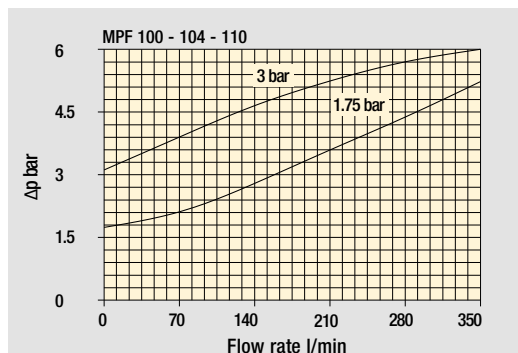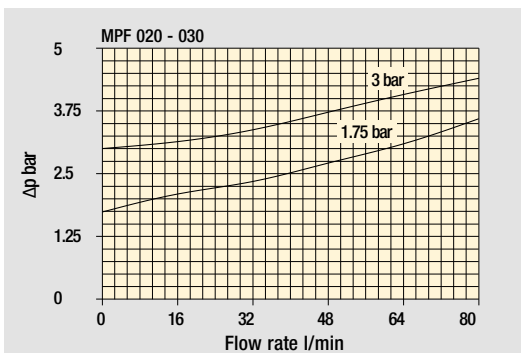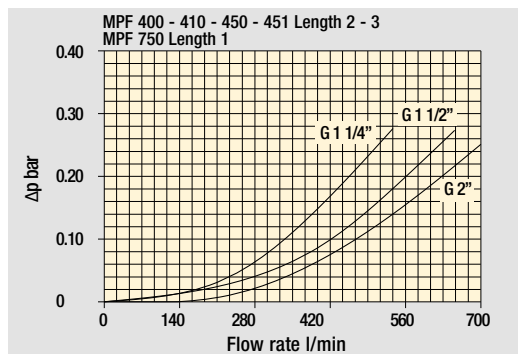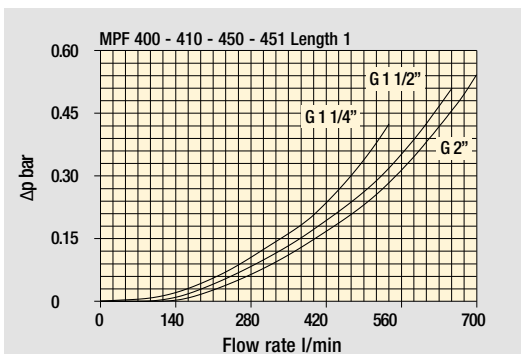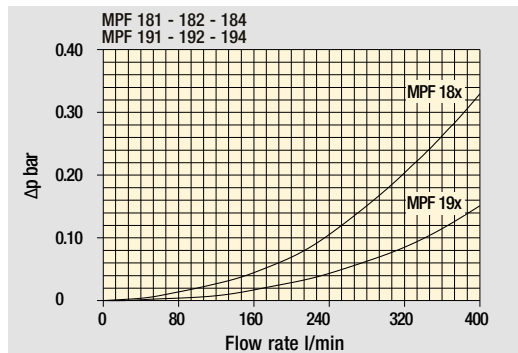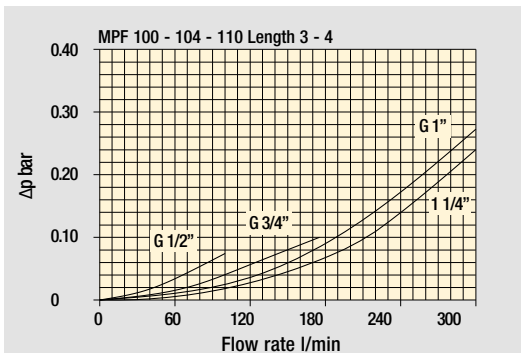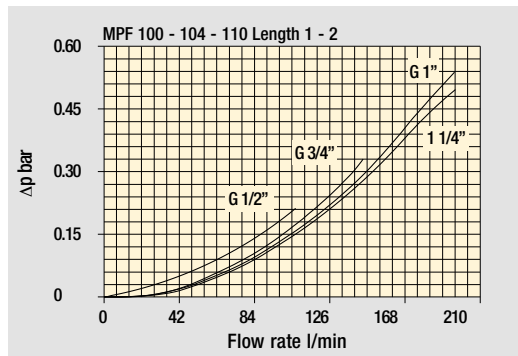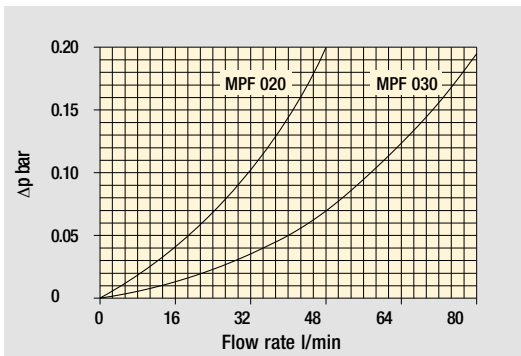


Bypass valve pressure drop


Style  
1 connection

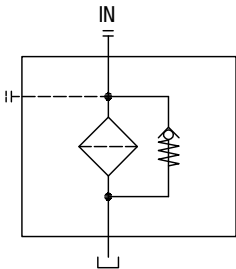

Style  
2 connections

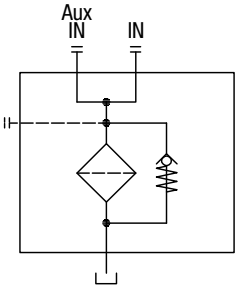

Style  
3 connections

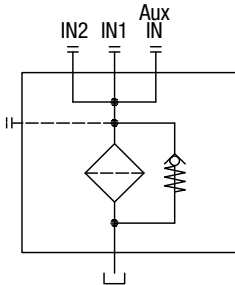


Standard - Single IN port



Double IN port  
Option: double indicator port



Double IN port - Drain port  
Option: indicator port

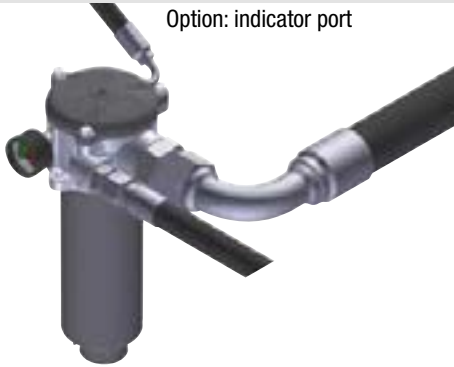

Double IN port - Double drain port



# MPF MPF020 - MPF030

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1:	<b>MPF020</b>	<b>1</b>	<b>A</b>	<b>P1</b>	<b>A10</b>	<b>H</b>	<b>E</b>	<b>P01</b>
<b>MPF020 MPF030</b> Filter element with standard spigot	Configuration example 2:	<b>MPF030</b>	<b>1</b>	<b>V</b>	<b>G1</b>	<b>M25</b>	<b>N</b>	<b>B</b>	<b>P01</b>
<b>Length</b>									
<b>1</b>									
<b>Seals and treatments</b>									
<b>A</b> NBR									
<b>V</b> FPM									
<b>W</b> NBR head anodized									
<b>Z</b> FPM head anodized									
<b>Connections</b>	<b>Size 20</b>	<b>Size 30</b>							
<b>P1</b> Hose barb ø12	•								
<b>G1</b> G1/2"		•							
<b>G4</b> 1/2" NPT		•							
<b>G7</b> SAE 8 - 3/4" - 16 UNF		•							
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm									
<b>A06</b> Inorganic microfiber 6 µm									
<b>A10</b> Inorganic microfiber 10 µm									
<b>A16</b> Inorganic microfiber 16 µm									
<b>A25</b> Inorganic microfiber 25 µm									
<b>M25</b> Wire mesh 25 µm									
<b>M60</b> Wire mesh 60 µm									
<b>M90</b> Wire mesh 90 µm									
<b>P10</b> Resin impregnated paper 10 µm									
<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>	<b>Filter media</b>								
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>N</b> 10 bar		•	•						
<b>H</b> 10 bar	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•							
				<b>Bypass valve</b>		<b>Execution</b>			
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard			
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized			


### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1:	<b>MF030</b>	<b>1</b>	<b>A10</b>	<b>H</b>	<b>B</b>	<b>E</b>	<b>P01</b>	
<b>MF030</b> Filter element with standard spigot	Configuration example 2:	<b>MF030</b>	<b>1</b>	<b>M25</b>	<b>N</b>	<b>V</b>		<b>P01</b>	
<b>Element length</b>									
<b>1</b>									
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm									
<b>A06</b> Inorganic microfiber 6 µm									
<b>A10</b> Inorganic microfiber 10 µm									
<b>A16</b> Inorganic microfiber 16 µm									
<b>A25</b> Inorganic microfiber 25 µm									
<b>M25</b> Wire mesh 25 µm									
<b>M60</b> Wire mesh 60 µm									
<b>M90</b> Wire mesh 90 µm									
<b>P10</b> Resin impregnated paper 10 µm									
<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>	<b>Filter media</b>								
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>N</b> 10 bar		•	•						
<b>H</b> 10 bar	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•							
			<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>		
			<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard		
			<b>V</b> FPM		<b>1.75 bar</b>		<b>Pxx</b> Customized		


### ACCESSORIES

<b>Indicators</b>	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
<b>Additional features</b>	page		
<b>TE</b> Extension tube	224		
<b>T5</b> Filler plug M30x1.5	225		

### MPF020

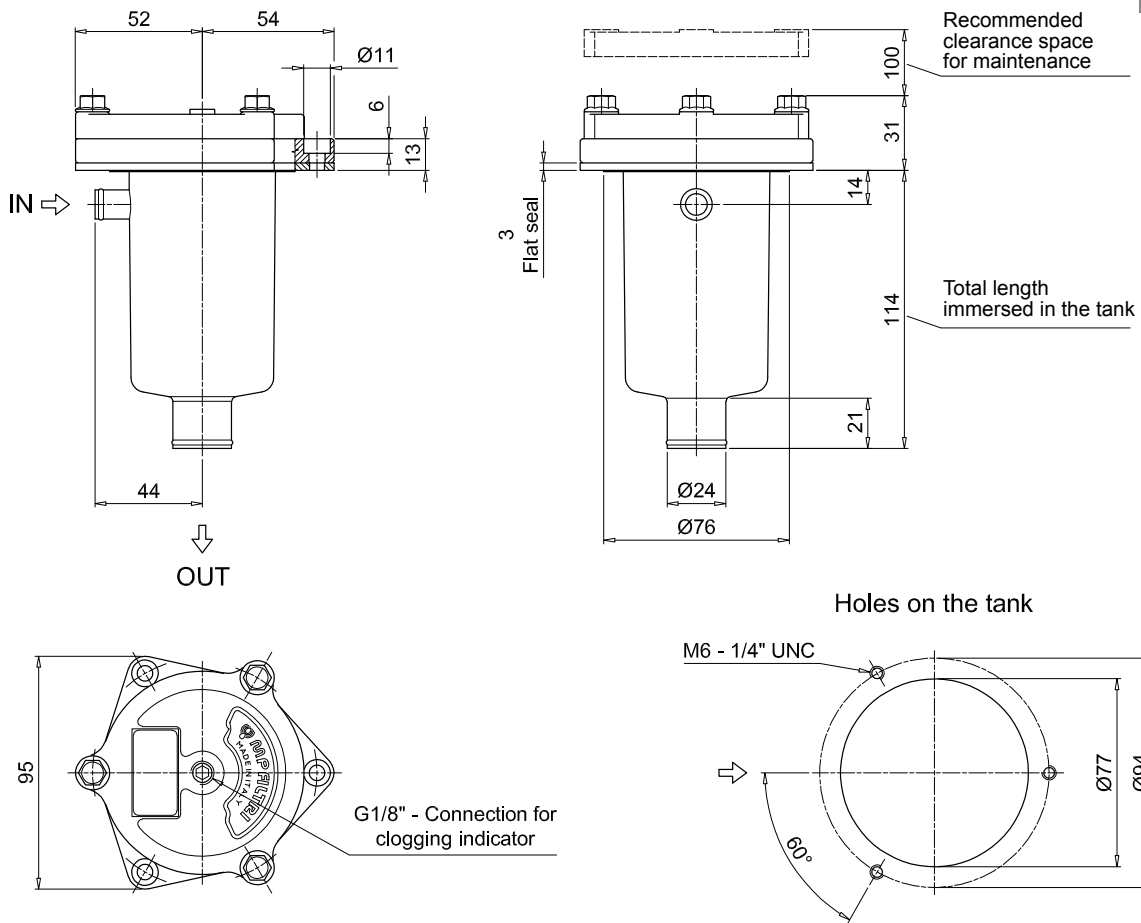

### MPF030

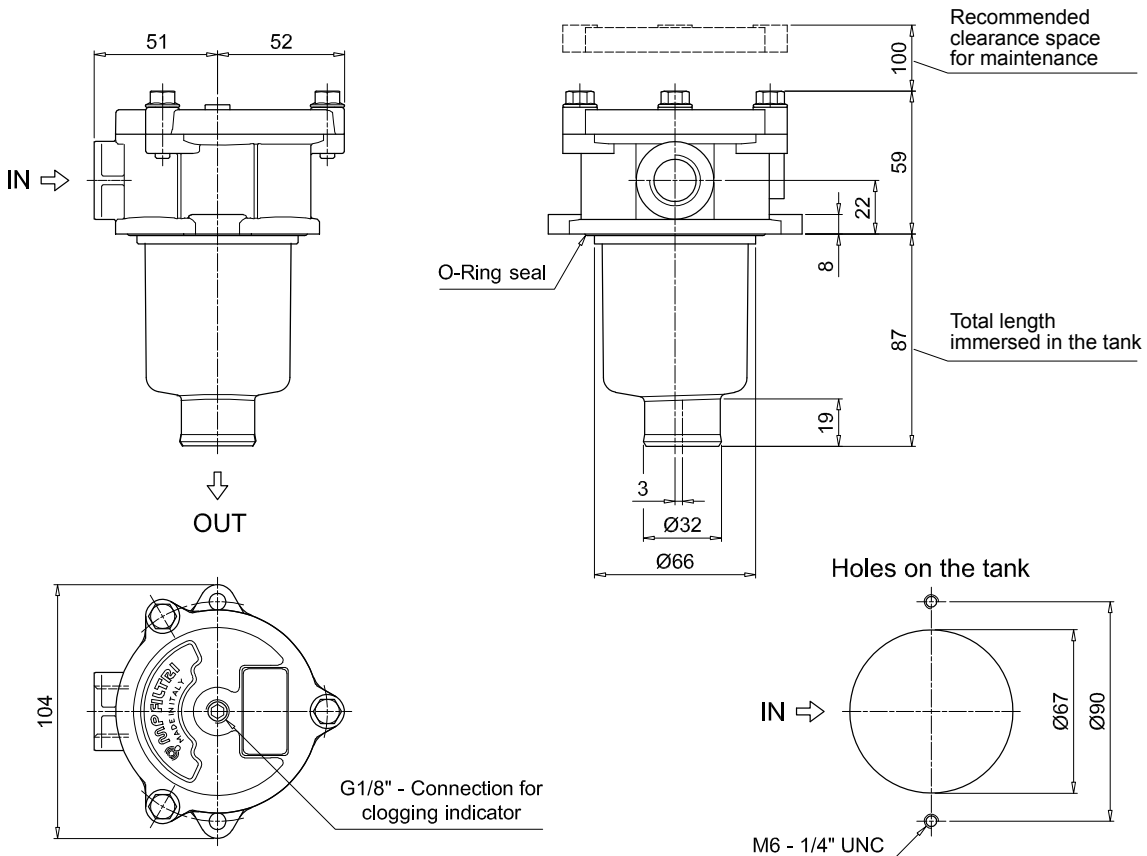

# MPF MPF100 - MPF104

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>		Configuration example 1: <b>MPF100</b>   <b>2</b>   <b>W</b>   <b>G3</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b>P01</b>									
<b>MPF100</b>   <b>MPF104</b> Filter element with standard spigot		Configuration example 2: <b>MPF104</b>   <b>4</b>   <b>A</b>   <b>G8</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>									
<b>Length</b>											
1   2   3   4											
<b>Seals and treatments</b>											
<b>A</b> NBR											
<b>V</b> FPM											
<b>W</b> NBR head anodized											
<b>Z</b> FPM head anodized											
<b>Connections</b>		<b>Size 100</b>		<b>Size 104</b>		<b>Connections</b>		<b>Size 100</b>		<b>Size 104</b>	
<b>G1</b> G1/2"		•		•		<b>G7</b> SAE 8 - 3/4" - 16 UNF		•		•	
<b>G2</b> G3/4"		•		•		<b>G8</b> SAE 12 - 1 1/16" - 12 UN		•		•	
<b>G3</b> G1"		•		•		<b>G9</b> SAE 16 - 1 5/16" - 12 UN		•		•	
<b>G4</b> 1/2" NPT		•		•		<b>G10</b> G1 1/4"		•			
<b>G5</b> 3/4" NPT		•		•		<b>G11</b> 1 1/4" NPT		•			
<b>G6</b> 1" NPT		•		•		<b>G12</b> SAE 20 - 1 5/8" - 12 UN		•			
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>				<b>Filter media</b>							
<b>N</b> 10 bar				Axx   Mxx   Pxx		•		•			
<b>H</b> 10 bar						•					
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC						•		•			
										<b>Bypass valve</b>	
										<b>E</b> 3 bar	
										<b>B</b> 1.75 bar	
										<b>Execution</b>	
										<b>P01</b> MP Filtri standard	
										<b>Pxx</b> Customized	



### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MF100</b>   <b>2</b>   <b>A06</b>   <b>W</b>   <b>B</b>   <b></b>   <b>P01</b>									
<b>MF100</b> Filter element with standard spigot		Configuration example 2: <b>MF100</b>   <b>4</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>E</b>   <b>P01</b>									
<b>Element length</b>											
1   2   3   4											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>				<b>Filter media</b>							
<b>N</b> 10 bar				Axx   Mxx   Pxx		•		•			
<b>H</b> 10 bar						•					
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC						•		•			
										<b>Seals</b>	
										<b>B</b> NBR	
										<b>V</b> FPM	
										<b>Bypass valve</b>	
										<b>E</b> 3 bar	
										<b></b> 1.75 bar	
										<b>Execution</b>	
										<b>P01</b> MP Filtri standard	
										<b>Pxx</b> Customized	

### ACCESSORIES

<b>Indicators</b>		<b>page</b>		<b>page</b>	
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		<b>page</b>		<b>page</b>	
<b>TE</b> Extension tube		224	<b>T5</b> Filler plug M30x1.5		225
<b>DFS</b> Diffuser with fast lock connection		225	<b>DPT</b> Dipstick		225



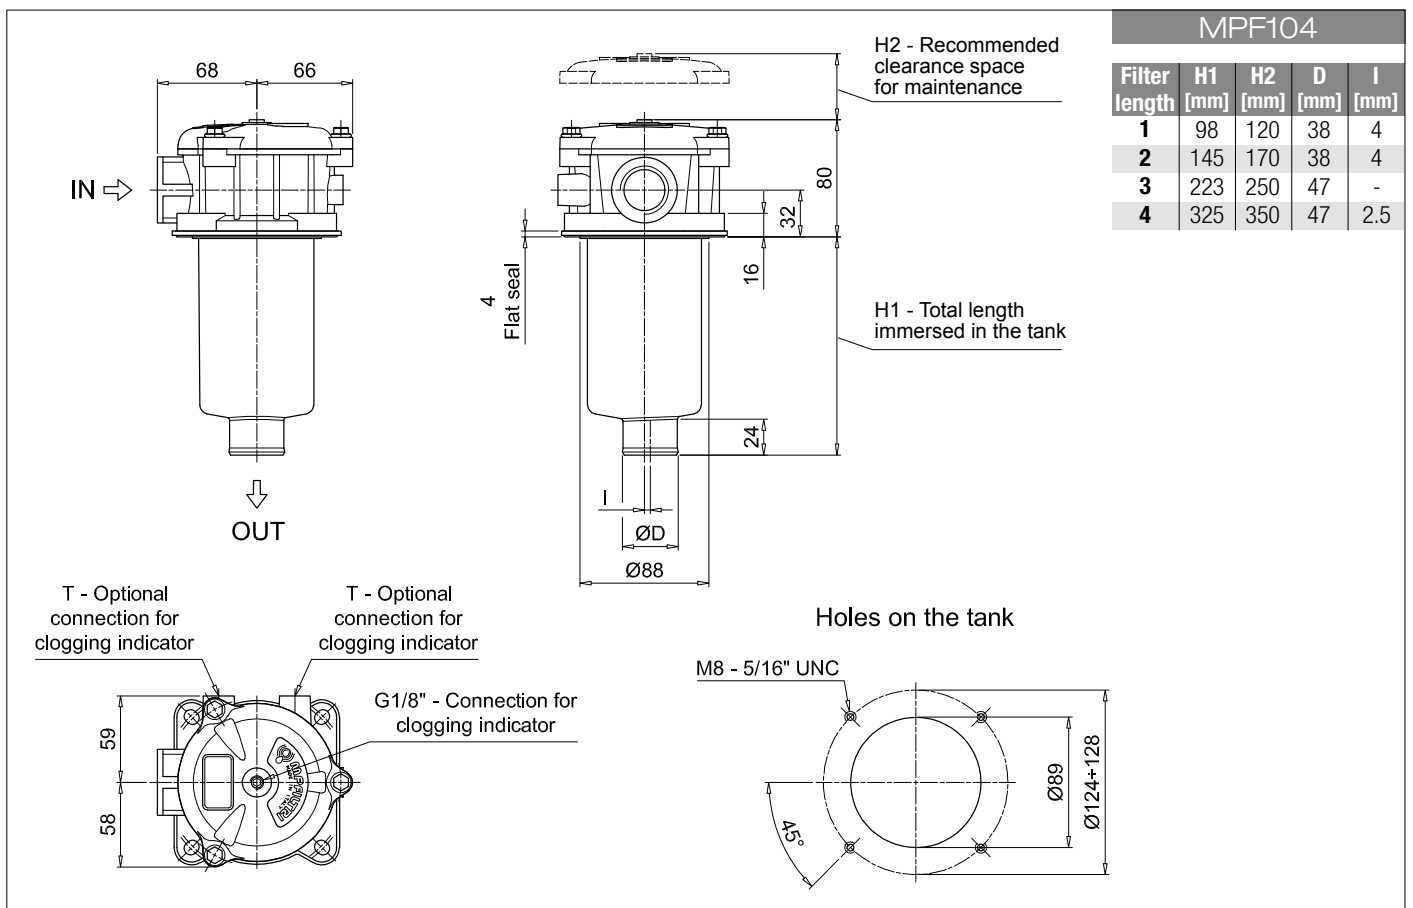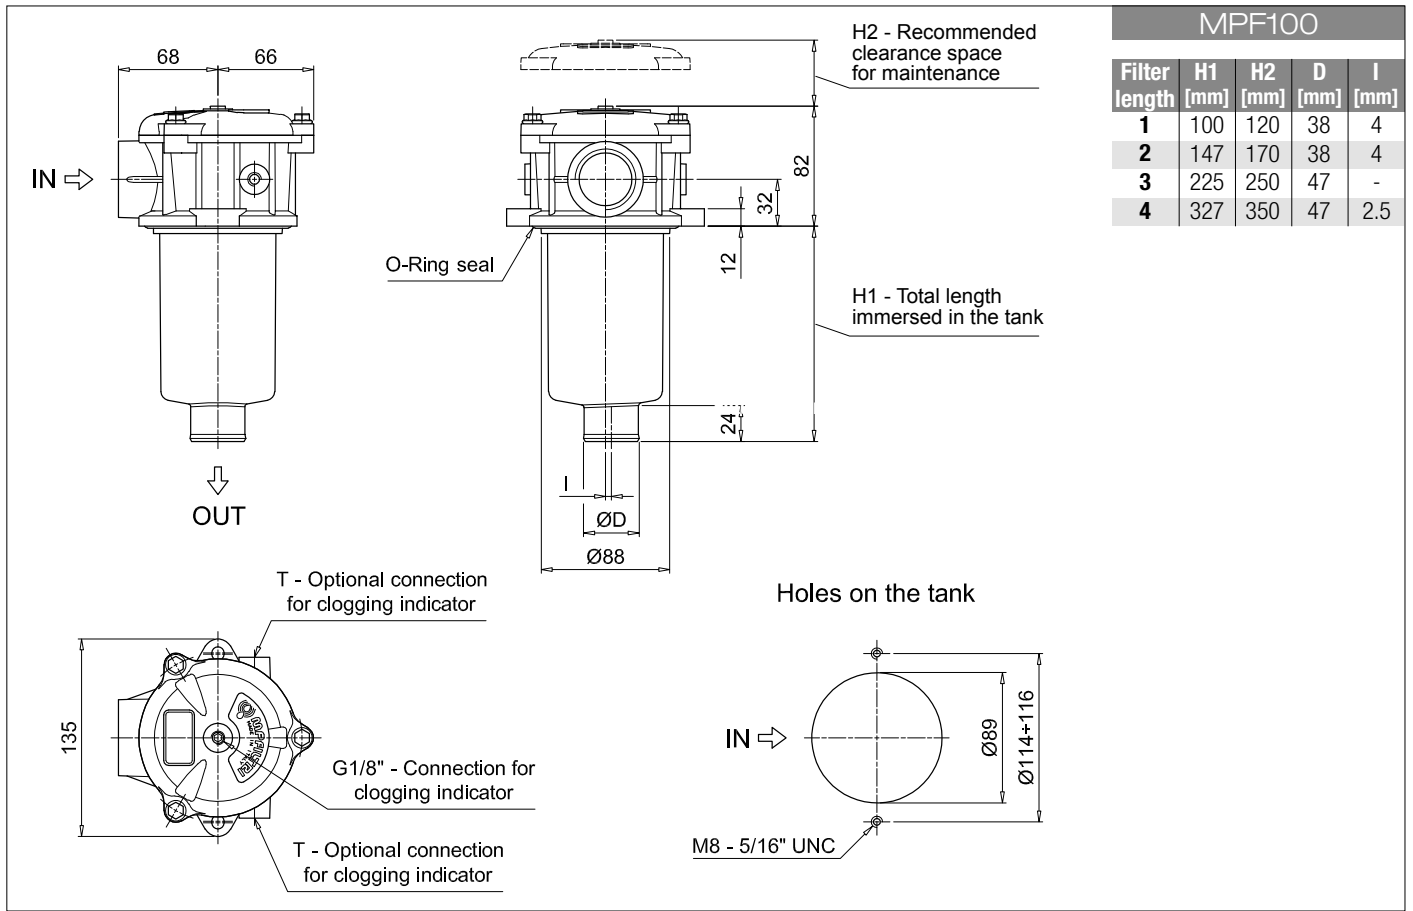

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b> <b>MPF110</b> Filter element with standard spigot	Configuration example 1:	MPF110	2	A	G2	1	A16	H	E	P01
	Configuration example 2:	MPF110	4	V	G12	1	M60	N	B	P01

<b>Length</b>	1	2	3	4
---------------	---	---	---	---

<b>Seals and treatments</b>	<b>A</b> NBR	<b>W</b> NBR head anodized
	<b>V</b> FPM	<b>Z</b> FPM head anodized

Main Connections	Aux size 1	Aux size 2	Main Connections	Aux size 1	Aux size 2
<b>G1</b> G1/2"	G3/8"	G1/2"	<b>G7</b> SAE 8 - 3/4" - 16 UNF	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF
<b>G2</b> G3/4"			<b>G8</b> SAE 12 - 1 1/16" - 12 UN		
<b>G3</b> G1"			<b>G9</b> SAE 16 - 1 5/16" - 12 UN		
<b>G4</b> 1/2" NPT	3/8" NPT	1/2" NPT	<b>G10</b> G1 1/4"	G3/8"	G1/2"
<b>G5</b> 3/4" NPT			<b>G11</b> 1 1/4" NPT	3/8" NPT	1/2" NPT
<b>G6</b> 1" NPT			<b>G12</b> SAE 20 - 1 5/8" - 12 UN	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF

<b>Aux connection</b> - see previous table	1 Aux size 1	2 Aux size 2
--	--------------	--------------

<b>Filtration rating (filter media)</b>	<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
	<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
	<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
	<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
	<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Element Δp	Filter media		
	Axx	Mxx	Pxx
<b>N</b> 10 bar		•	•
<b>H</b> 10 bar	•		
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•	

<b>Bypass valve</b>	<b>Execution</b>
<b>E</b> 3 bar	<b>P01</b> MP Filtri standard
<b>B</b> 1.75 bar	<b>Pxx</b> Customized

### FILTER ELEMENT

<b>Element series and size</b> <b>MF100</b> Filter element with standard spigot	Configuration example 1:	MF100	2	A16	H	B	E	P01
	Configuration example 2:	MF100	4	M60	N	V		P01

<b>Element length</b>	1	2	3	4
-----------------------	---	---	---	---


<b>Filtration rating (filter media)</b>	<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
	<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
	<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
	<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
	<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Element Δp	Filter media		
	Axx	Mxx	Pxx
<b>N</b> 10 bar		•	•
<b>H</b> 10 bar	•		
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•	

<b>Seals</b>	<b>Bypass valve</b>	<b>Execution</b>
<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard
<b>V</b> FPM	1.75 bar	<b>Pxx</b> Customized

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		page
<b>TE</b> Extension tube	224	<b>T5</b> Filler plug M30x1.5	225
<b>DFS</b> Diffuser with fast lock connection	225	<b>DPT</b> Dipstick	225

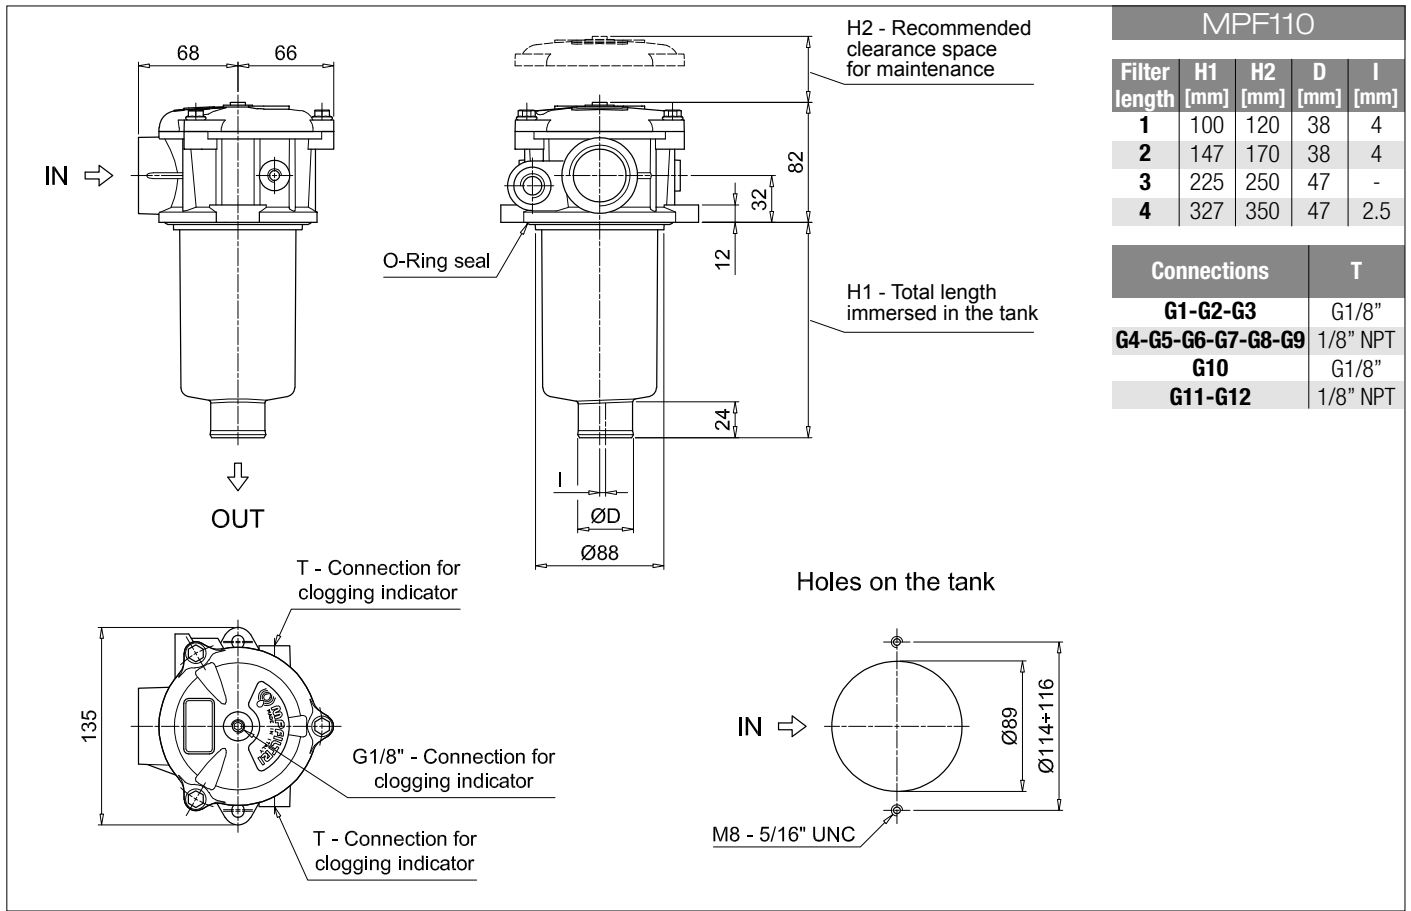

MPF110				
Filter length	H1 [mm]	H2 [mm]	D [mm]	I [mm]
1	100	120	38	4
2	147	170	38	4
3	225	250	47	-
4	327	350	47	2.5

Connections	T
G1-G2-G3	G1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT
G10	G1/8"
G11-G12	1/8" NPT

# MPF MPF181 - MPF191

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>			Configuration example 1: <b>MPF181</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>A25</b>   <b>H</b>   <b>E</b>   <b>P01</b>								
<b>MPF181</b>   <b>MPF191</b> Filter element with standard spigot			Configuration example 2: <b>MPF191</b>   <b>2</b>   <b>V</b>   <b>G2</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>P01</b>								
<b>Length</b>		<b>Size 181</b>	<b>Size 191</b>								
<b>1</b>		•									
<b>2</b>		•	•								
<b>Seals and treatments</b>											
<b>A</b> NBR	<b>B</b> NBR flat seal on head										
<b>V</b> FPM	<b>D</b> FPM flat seal on head										
<b>W</b> NBR head anodized	<b>L</b> NBR head anodized, flat seal on head										
<b>Z</b> FPM head anodized	<b>M</b> FPM head anodized, flat seal on head										
<b>Connections</b>											
<b>G1</b> G1 1/4"	<b>G5</b> 1 1/2" NPT										
<b>G2</b> G1 1/2"	<b>G7</b> SAE 20 - 1 5/8" - 12 UN										
<b>G4</b> 1 1/4" NPT	<b>G8</b> SAE 24 - 1 7/8" - 12 UN										
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm										
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm										
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm										
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm										
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm										
<b>Element Δp</b>			<b>Filter media</b>								
<b>N</b> 10 bar	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>								
<b>H</b> 10 bar		•	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•									
			<b>Bypass valve</b>			<b>Execution</b>					
			<b>E</b> 3 bar			<b>P01</b> MP Filtri standard					
			<b>B</b> 1.75 bar			<b>Pxx</b> Customized					

### FILTER ELEMENT

<b>Element series and size</b>			Configuration example 1: <b>MF180</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>								
<b>MF180</b>   <b>MF190</b> Filter element with standard spigot			Configuration example 2: <b>MF190</b>   <b>2</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b></b>   <b>P01</b>								
<b>Element length</b>		<b>Size 180</b>	<b>Size 190</b>								
<b>1</b>		•									
<b>2</b>		•	•								
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm										
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm										
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm										
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm										
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm										
<b>Element Δp</b>			<b>Filter media</b>								
<b>N</b> 10 bar	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>								
<b>H</b> 10 bar		•	•								
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•									
			<b>Seals</b>			<b>Bypass valve</b>			<b>Execution</b>		
			<b>B</b> NBR			<b>E</b> 3 bar			<b>P01</b> MP Filtri standard		
			<b>V</b> FPM			<b></b> 1.75 bar			<b>Pxx</b> Customized		

### ACCESSORIES

<b>Indicators</b>		page			page
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		page			
<b>TE</b> Extension tube		224			
<b>Sxx</b> Extension tube		224			
<b>T5</b> Filler plug M30x1.5		225			

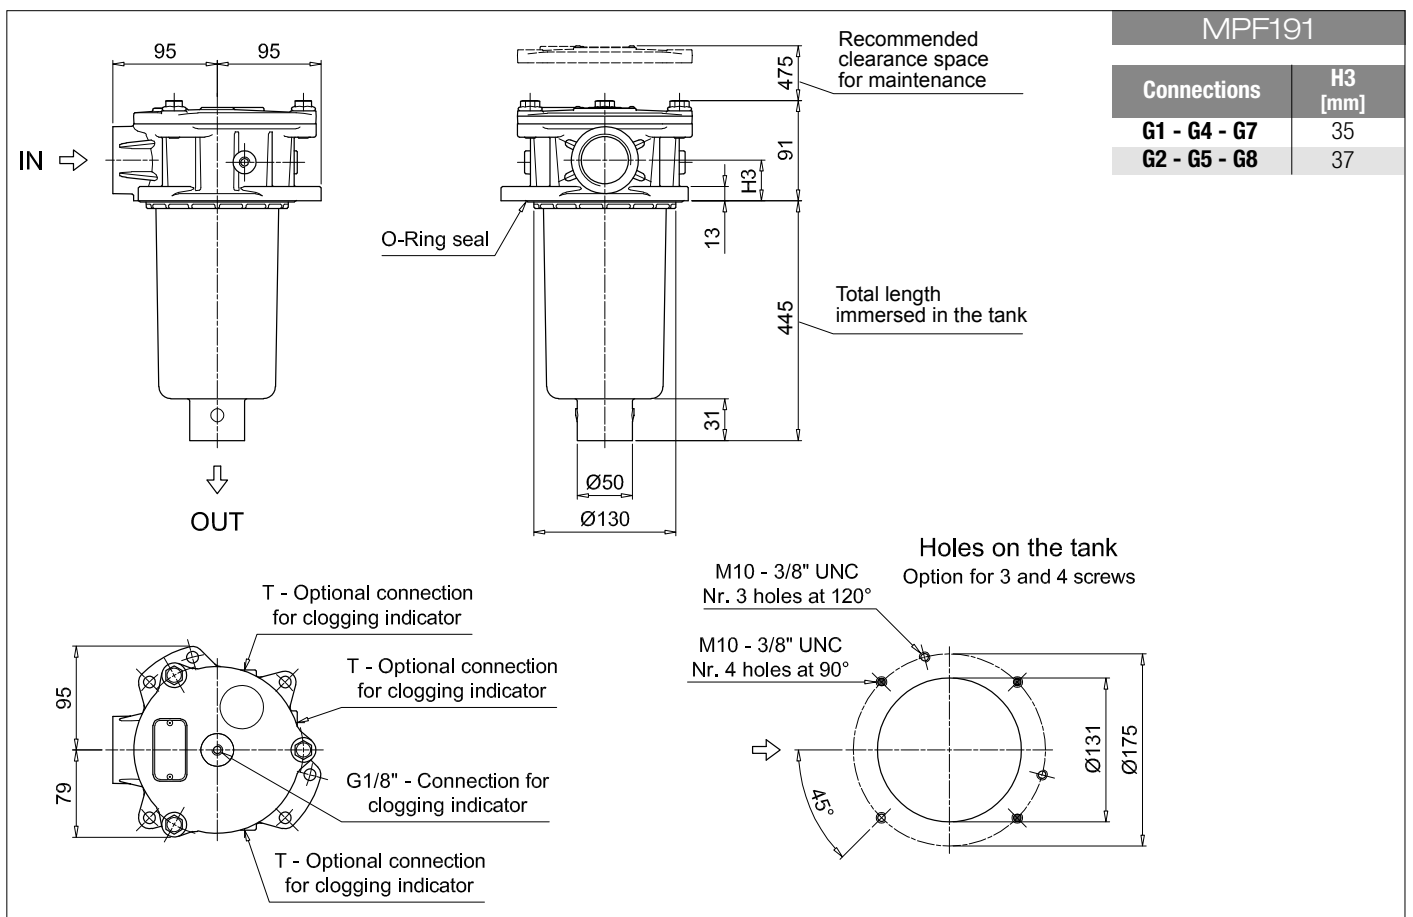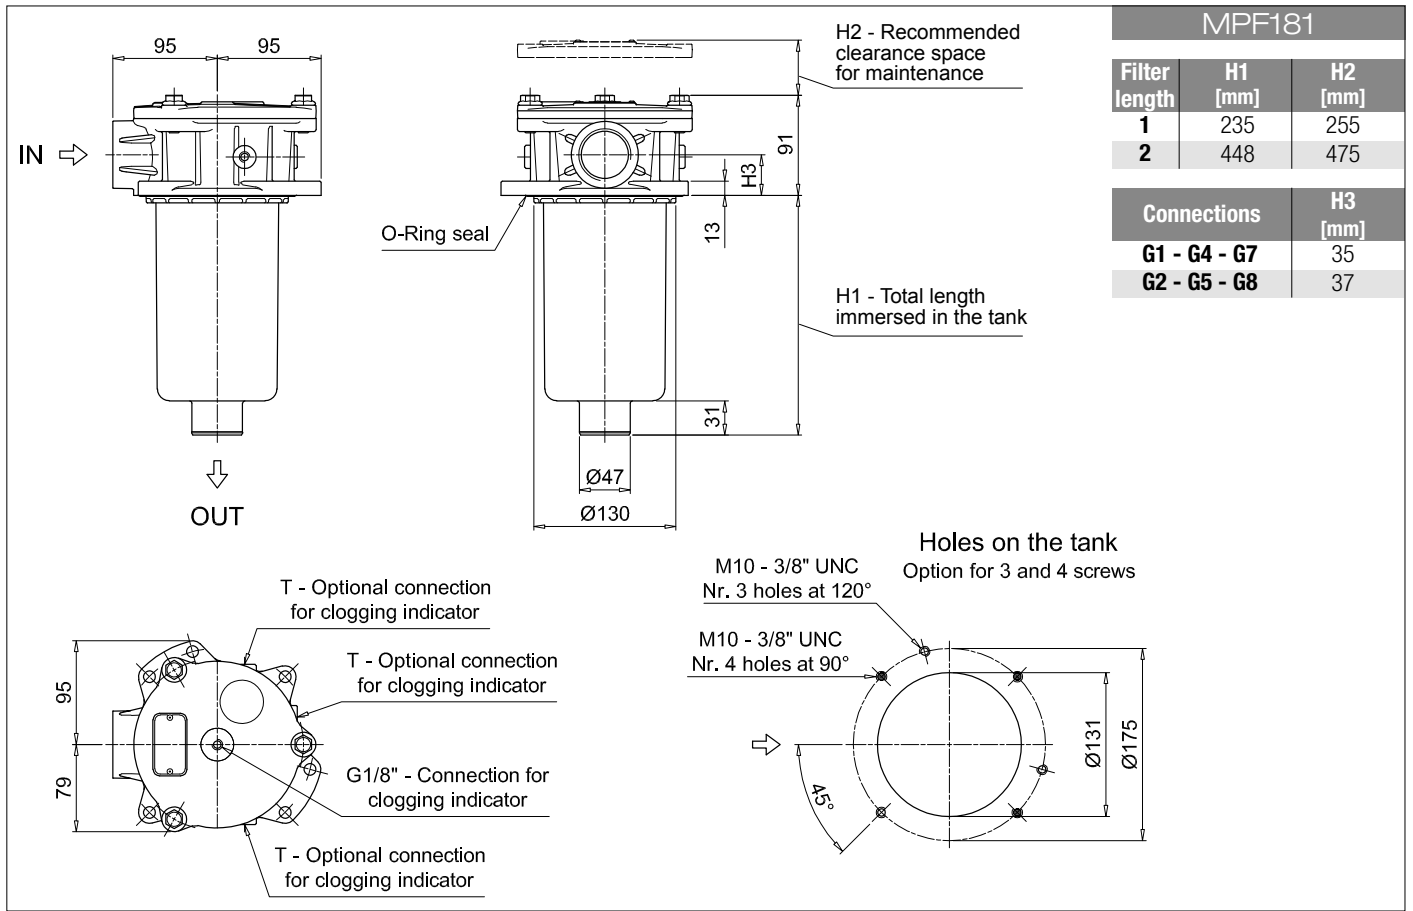

# MPF MPF182 - MPF192

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>			Configuration example 1: <b>MPF182</b>   1   A   G1   1   A25   H   E   P01										
<b>MPF182 MPF192</b> Filter element with standard spigot			Configuration example 2: <b>MPF192</b>   2   V   G2   2   P10   N   B   P01										
<b>Length</b>		<b>Size 182</b>	<b>Size 192</b>										
1		•											
2		•	•										
<b>Seals and treatments</b>													
<b>A</b> NBR	<b>B</b> NBR	flat seal on head											
<b>V</b> FPM	<b>D</b> FPM	flat seal on head											
<b>W</b> NBR head anodized	<b>L</b> NBR	head anodized, flat seal on head											
<b>Z</b> FPM head anodized	<b>M</b> FPM	head anodized, flat seal on head											
<b>Main Connections</b>		<b>Aux size 1</b>	<b>Aux size 2</b>										
<b>G1</b> G1 1/4"		G1/2"	G3/4"										
<b>G4</b> 1 1/4" NPT		1/2" NPT	3/4" NPT										
<b>G7</b> SAE 20 - 1 5/8" - 12 UN		SAE 8 - 3/16" - 16 UNF	SAE 12 - 1 1/16" - 12 UN										
<b>Aux connection</b> - see previous table													
1 Aux size 1		2 Aux size 2											
<b>Filtration rating (filter media)</b>													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
<b>Element Δp</b>		<b>Filter media</b>											
		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>									
<b>N</b> 10 bar			•	•									
<b>H</b> 10 bar			•										
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•										
				<b>Bypass valve</b>		<b>Execution</b>							
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard							
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized							

### FILTER ELEMENT

<b>Element series and size</b>			Configuration example 1: <b>MF180</b>   1   A25   H   B   E   P01										
<b>MF180 MF190</b> Filter element with standard spigot			Configuration example 2: <b>MF190</b>   2   P10   N   V     P01										
<b>Element length</b>		<b>Size 180</b>	<b>Size 190</b>										
1		•											
2		•	•										
<b>Filtration rating (filter media)</b>													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
<b>Element Δp</b>		<b>Filter media</b>											
		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>									
<b>N</b> 10 bar			•	•									
<b>H</b> 10 bar			•										
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•										
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>					
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard					
				<b>V</b> FPM		1.75 bar		<b>Pxx</b> Customized					

### ACCESSORIES

<b>Indicators</b>		page			page
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		page			
<b>TE</b> Extension tube		224			
<b>Sxx</b> Extension tube		224			
<b>T5</b> Filler plug M30x1.5		225			

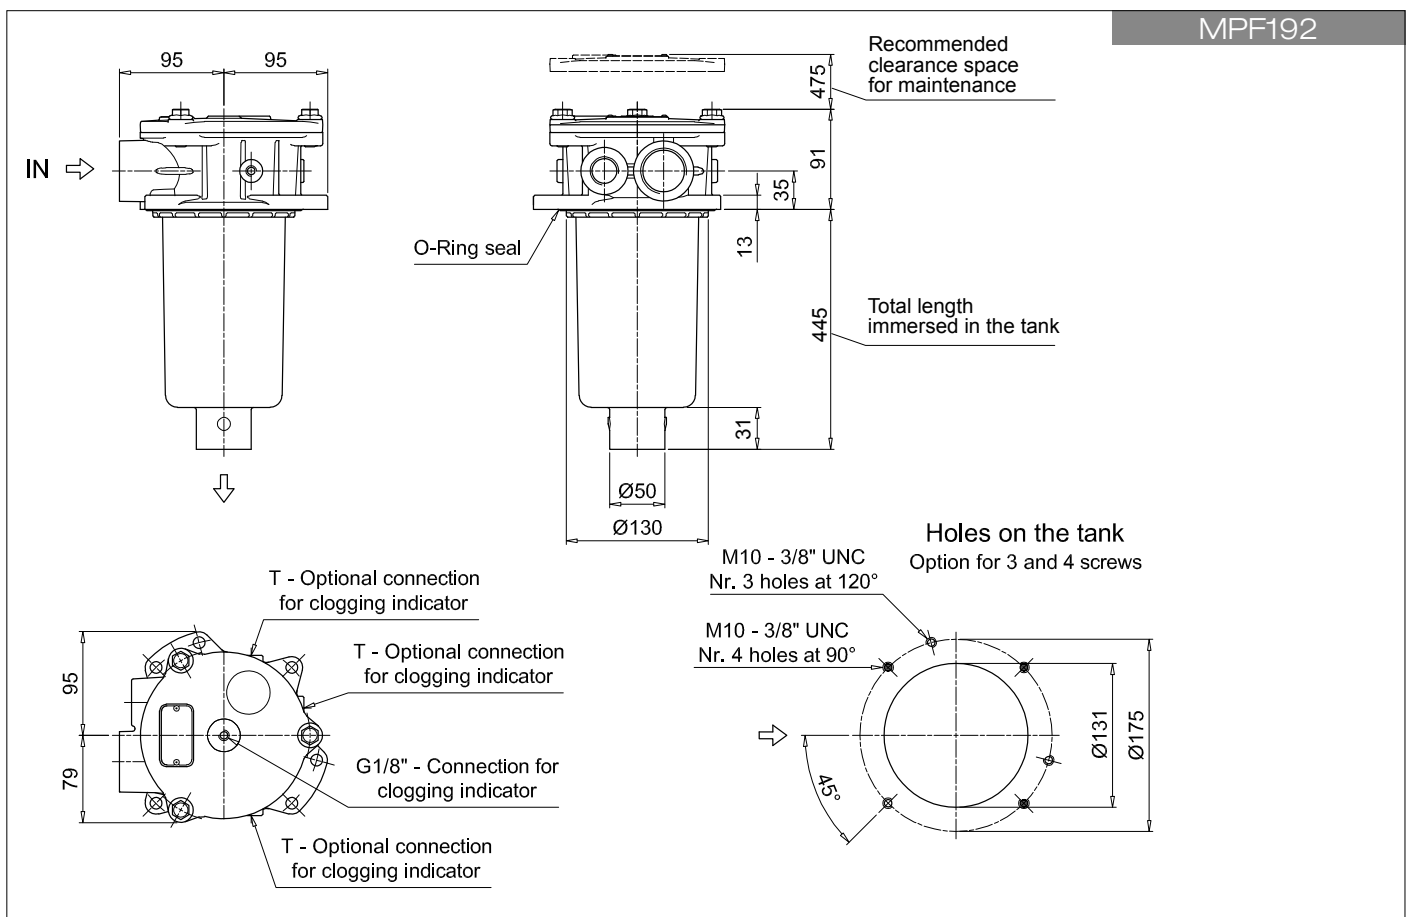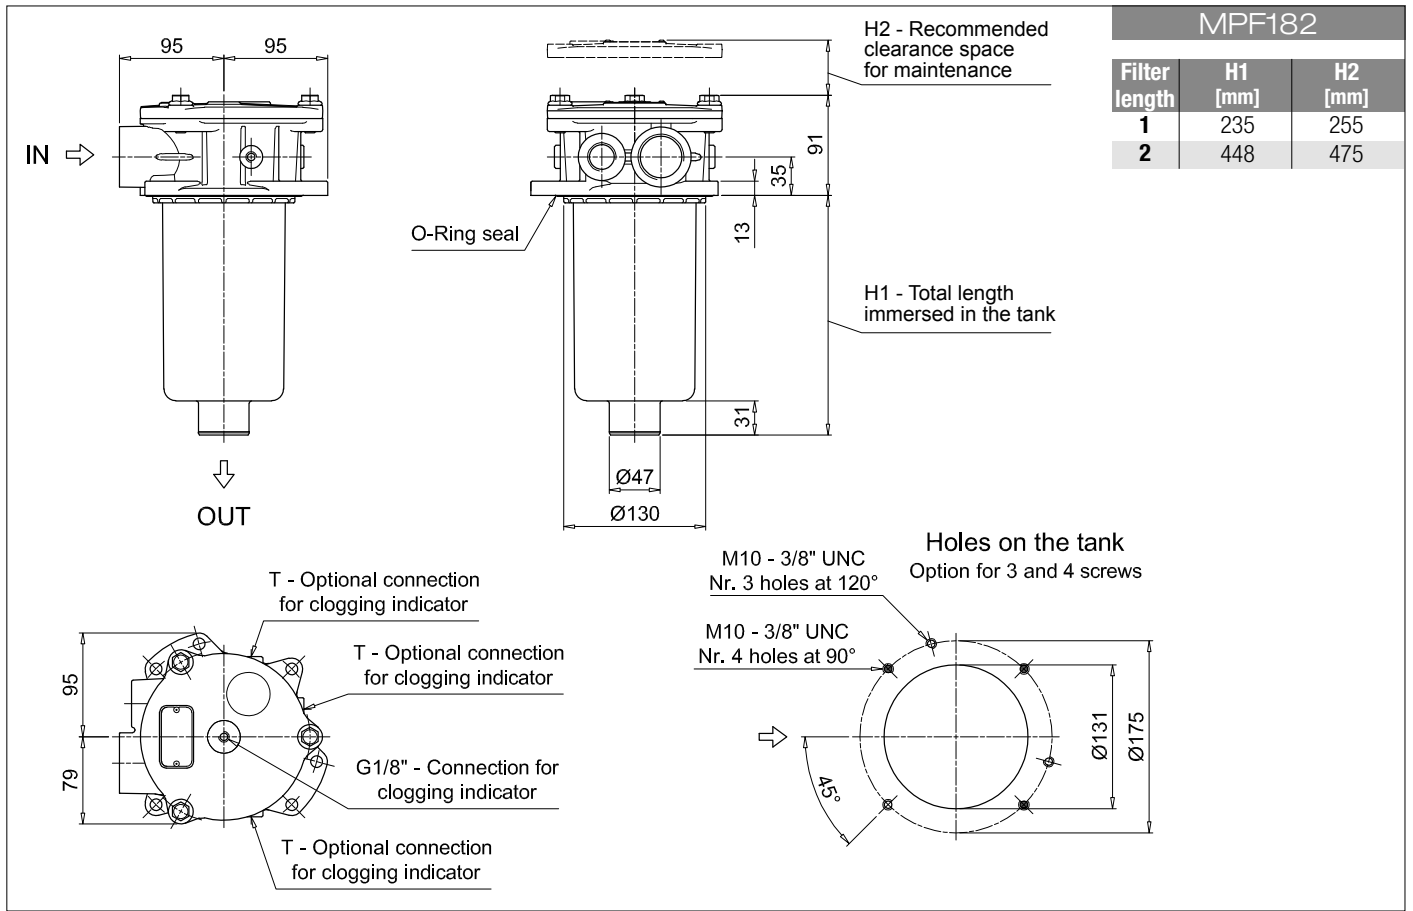

# MPF MPF184 - MPF194

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>			Configuration example 1: <b>MPF184</b>   <b>1</b>   <b>A</b>   <b>G1</b>   <b>A25</b>   <b>H</b>   <b>E</b>   <b>P01</b>								
<b>MPF184 MPF194</b> Filter element with standard spigot			Configuration example 2: <b>MPF194</b>   <b>2</b>   <b>V</b>   <b>F3</b>   <b>P10</b>   <b>N</b>   <b>B</b>   <b>P01</b>								
<b>Length</b>		<b>Size 184</b>	<b>Size 194</b>								
<b>1</b>		•									
<b>2</b>		•	•								
<b>Seals and treatments</b>											
<b>A</b>	NBR	<b>W</b>	NBR head anodized								
<b>V</b>	FPM	<b>Z</b>	FPM head anodized								
<b>Main Connections</b>		<b>Rear connections</b>		<b>Main Connections</b>		<b>Rear connections</b>					
<b>G1</b>	G1 1/4"	-		<b>G13</b>	G1 1/2"	-					
<b>G2</b>	G1 1/4"	G1 1/4"		<b>G14</b>	G1 1/2"	G1 1/4"					
<b>G4</b>	1 1/4" NPT	-		<b>G15</b>	1 1/2" NPT	-					
<b>G5</b>	1 1/4" NPT	1 1/4" NPT		<b>G16</b>	1 1/2" NPT	1 1/4" NPT					
<b>G7</b>	SAE 20 - 1 5/8" - 12 UN	-		<b>F1</b>	1 1/2" SAE 3000 psi/M	-					
<b>G8</b>	SAE 20 - 1 5/8" - 12 UN	SAE 20 - 1 5/8" - 12 UN		<b>F2</b>	1 1/2" SAE 3000 psi/UNC	-					
<b>G10</b>	SAE 24 - 1 7/8" - 12 UN	-		<b>F3</b>	1 1/2" SAE 3000 psi/M	1 1/2" SAE 3000 psi/M					
<b>G11</b>	SAE 24 - 1 7/8" - 12 UN	SAE 20 - 1 5/8" - 12 UN		<b>F4</b>	1 1/2" SAE 3000 psi/UNC	1 1/2" SAE 3000 psi/UNC					
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber	3 µm		<b>M25</b>	Wire mesh	25 µm					
<b>A06</b>	Inorganic microfiber	6 µm		<b>M60</b>	Wire mesh	60 µm					
<b>A10</b>	Inorganic microfiber	10 µm		<b>M90</b>	Wire mesh	90 µm					
<b>A16</b>	Inorganic microfiber	16 µm		<b>P10</b>	Resin impregnated paper	10 µm					
<b>A25</b>	Inorganic microfiber	25 µm		<b>P25</b>	Resin impregnated paper	25 µm					
<b>Element Δp</b>			<b>Filter media</b>								
<b>N</b>	10 bar		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>H</b>	10 bar		•	•	•						
<b>W</b>	10 bar, compatible with fluids HFA, HFB and HFC		•	•							
						<b>Bypass valve</b>	<b>Execution</b>				
						<b>E</b> 3 bar	<b>P01</b> MP Filtri standard				
						<b>B</b> 1.75 bar	<b>Pxx</b> Customized				


### FILTER ELEMENT

<b>Element series and size</b>			Configuration example 1: <b>MF180</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>								
<b>MF180 MF190</b> Filter element with standard spigot			Configuration example 2: <b>MF190</b>   <b>2</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b></b>   <b>P01</b>								
<b>Element length</b>		<b>Size 180</b>	<b>Size 190</b>								
<b>1</b>		•									
<b>2</b>		•	•								
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber	3 µm		<b>M25</b>	Wire mesh	25 µm					
<b>A06</b>	Inorganic microfiber	6 µm		<b>M60</b>	Wire mesh	60 µm					
<b>A10</b>	Inorganic microfiber	10 µm		<b>M90</b>	Wire mesh	90 µm					
<b>A16</b>	Inorganic microfiber	16 µm		<b>P10</b>	Resin impregnated paper	10 µm					
<b>A25</b>	Inorganic microfiber	25 µm		<b>P25</b>	Resin impregnated paper	25 µm					
<b>Element Δp</b>			<b>Filter media</b>								
<b>N</b>	10 bar		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>						
<b>H</b>	10 bar		•	•	•						
<b>W</b>	10 bar, compatible with fluids HFA, HFB and HFC		•	•							
						<b>Seals</b>	<b>Bypass valve</b>	<b>Execution</b>			
						<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard			

### ACCESSORIES

<b>Indicators</b>	page						page
<b>BVA</b> Axial pressure gauge	216			<b>BEA</b> Electrical pressure indicator			215
<b>BVR</b> Radial pressure gauge	216			<b>BEM</b> Electrical pressure indicator			215
<b>BVP</b> Visual pressure indicator with automatic reset	217			<b>BLA</b> Electrical / visual pressure indicator			215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217						
<b>Additional features</b>	page						
<b>TE</b> Extension tube	224						
<b>Sxx</b> Extension tube	224						
<b>T5</b> Filler plug M30x1.5	225						




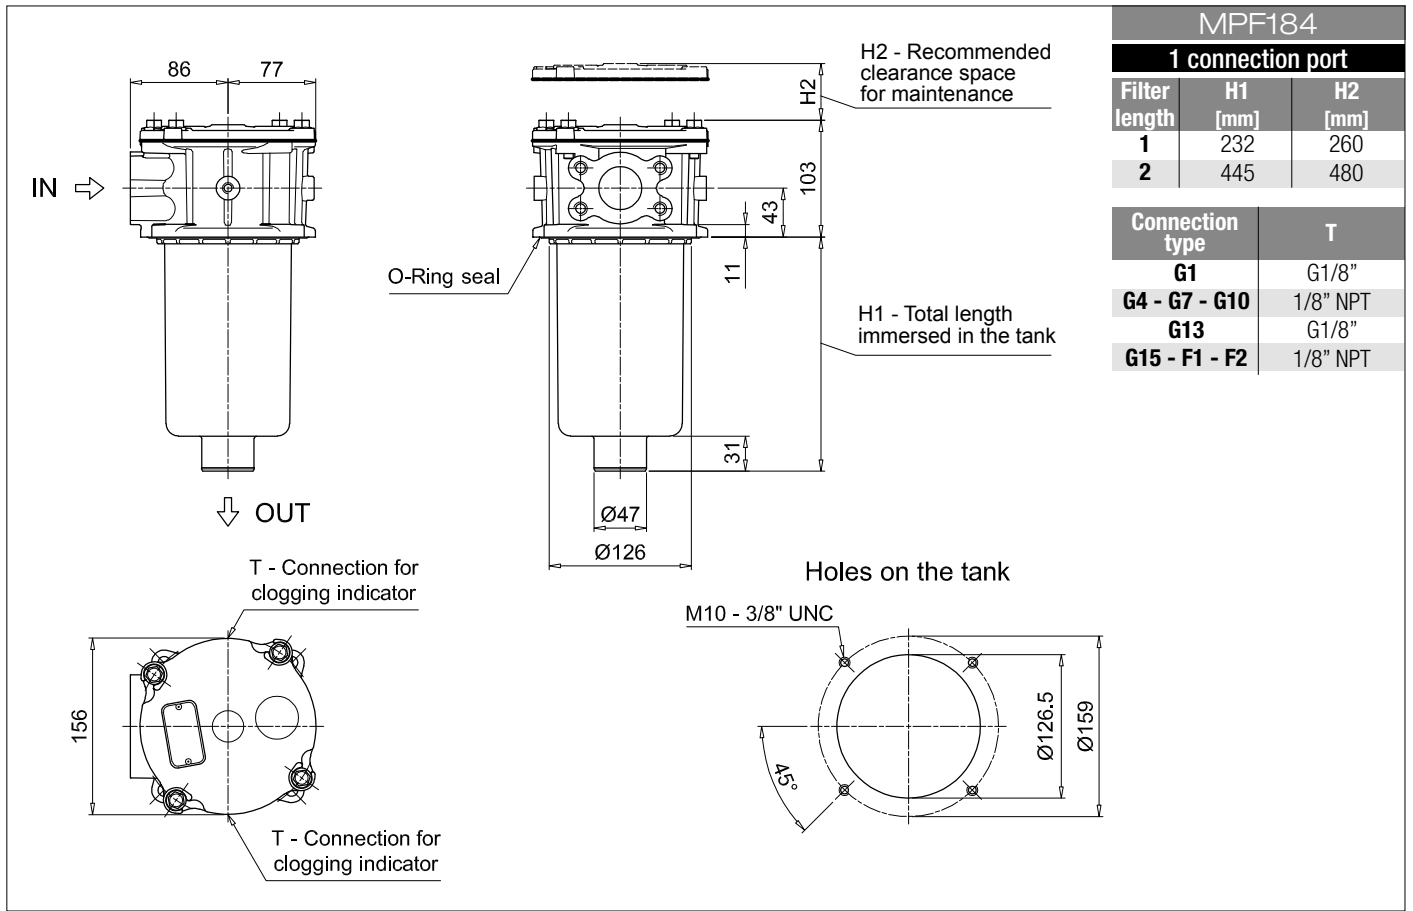

MPF184		
1 connection port		
Filter length	H1 [mm]	H2 [mm]
1	232	260
2	445	480

Connection type	T
G1	G1/8"
G4 - G7 - G10	1/8" NPT
G13	G1/8"
G15 - F1 - F2	1/8" NPT

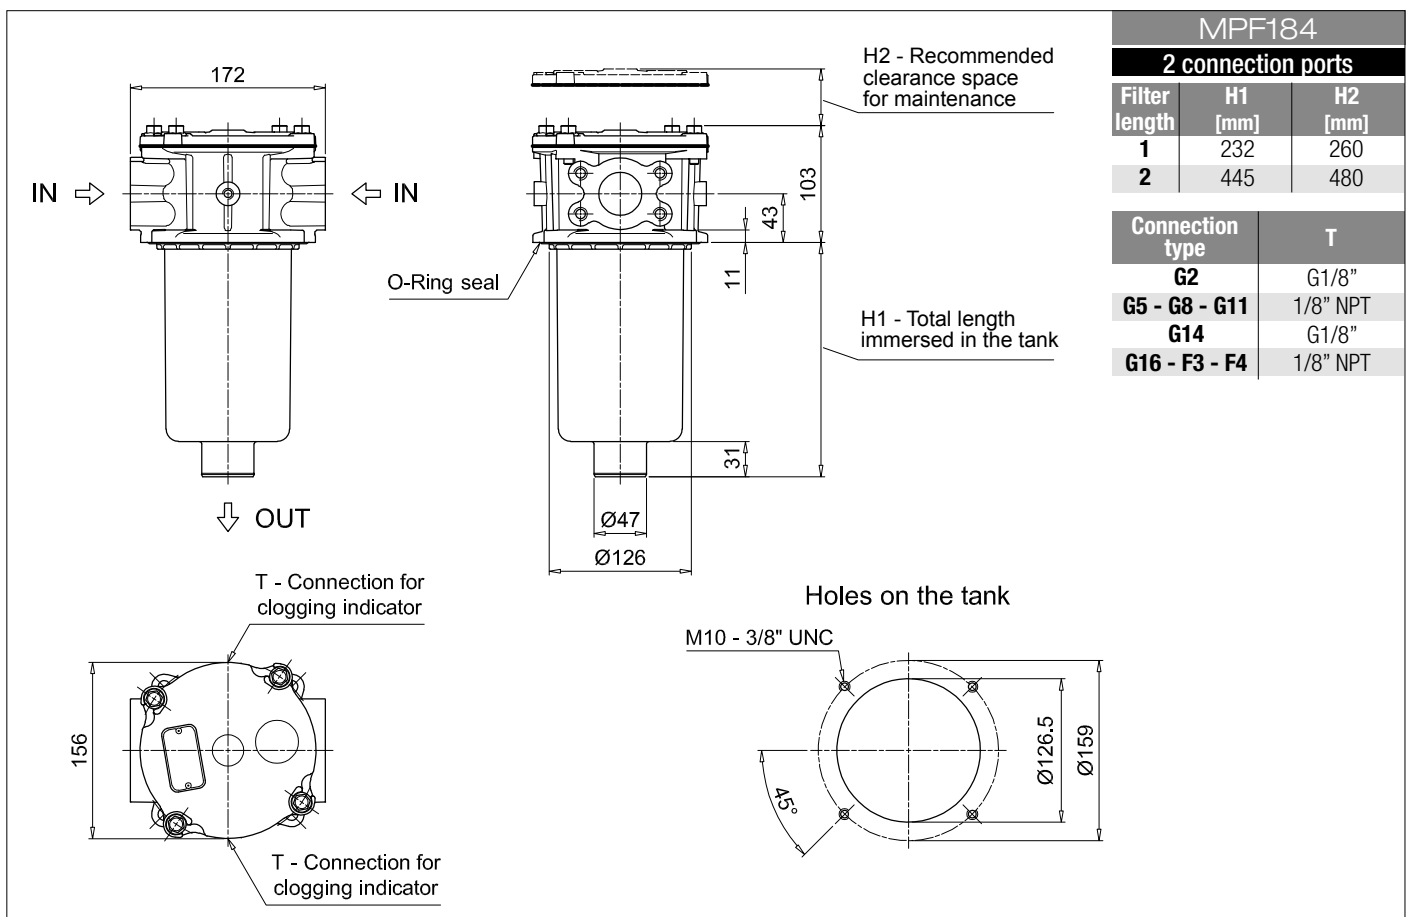



MPF184		
2 connection ports		
Filter length	H1 [mm]	H2 [mm]
1	232	260
2	445	480

Connection type	T
G2	G1/8"
G5 - G8 - G11	1/8" NPT
G14	G1/8"
G16 - F3 - F4	1/8" NPT

# MPF MPF184 - MPF194

## Dimensions



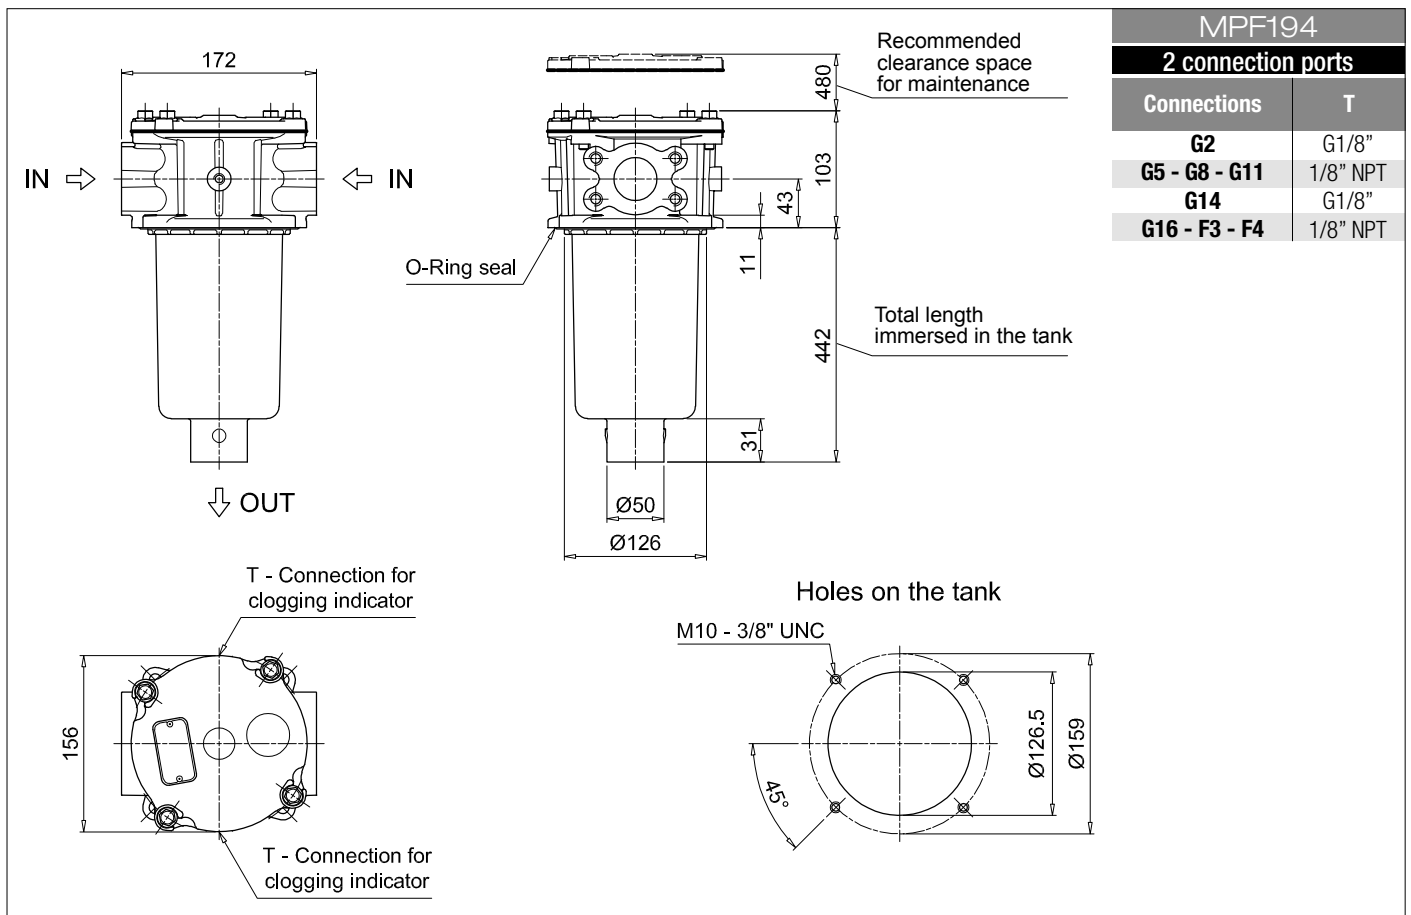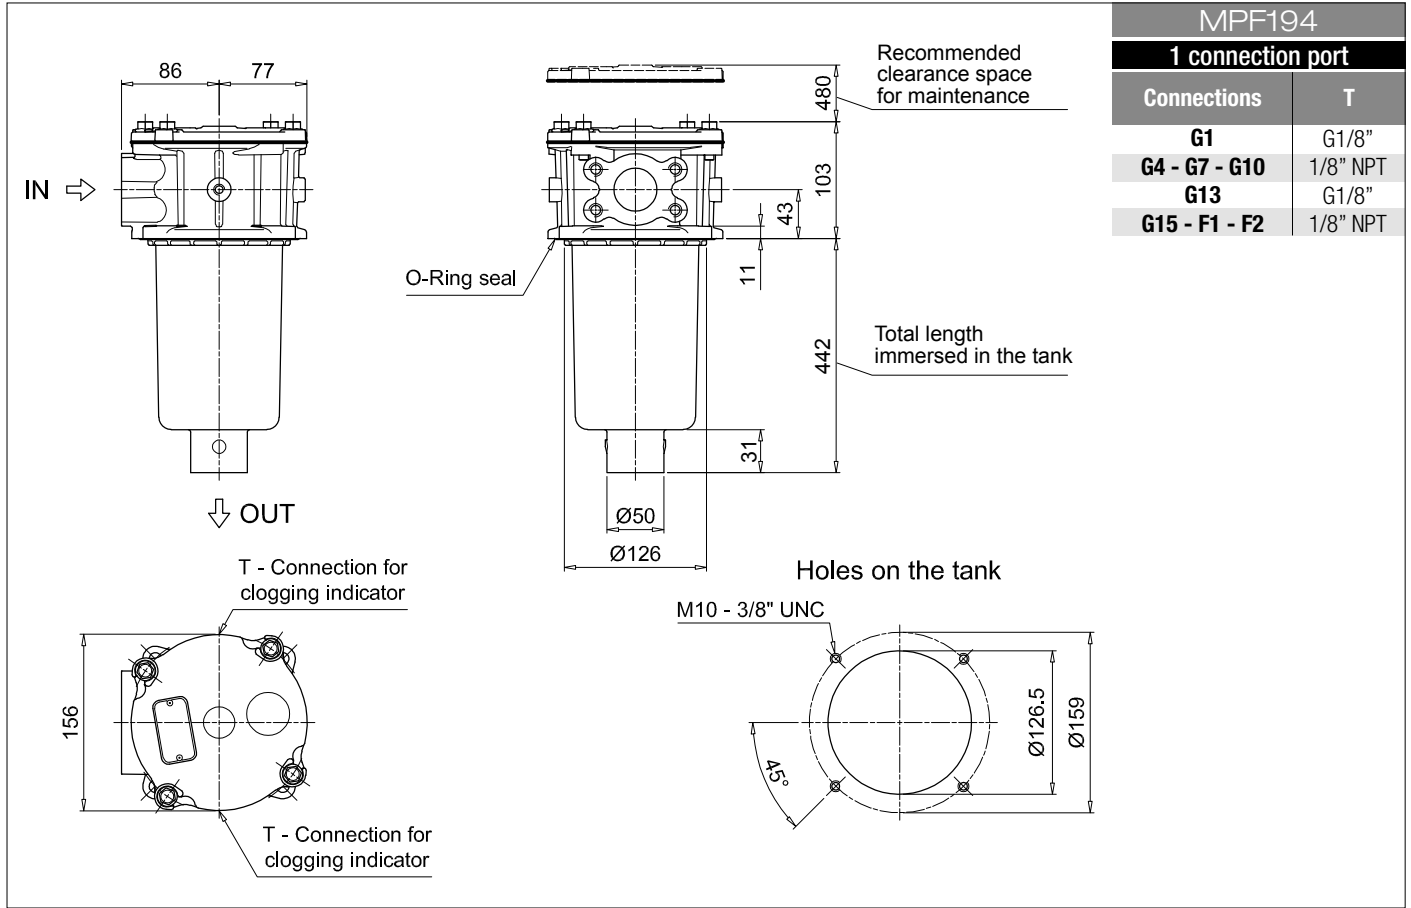

## Designation & Ordering code

### COMPLETE FILTER


<b>Series and size</b>		Configuration example 1: <b>MPF400</b>   <b>1</b>   <b>A</b>   <b>G9</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b>P01</b>								
<b>MPF400</b> Filter element with standard spigot		Configuration example 2: <b>MPF400</b>   <b>2</b>   <b>V</b>   <b>G4</b>   <b>P10</b>   <b>N</b>   <b>E</b>   <b>P01</b>								
<b>Length</b>										
<b>1</b>   <b>2</b>   <b>3</b>										
<b>Seals and treatments</b>										
<b>A</b> NBR										
<b>V</b> FPM										
<b>W</b> NBR head anodized										
<b>Z</b> FPM head anodized										
<b>Connections</b>										
<b>G1</b> G1 1/4"										
<b>G2</b> G1 1/2"										
<b>G3</b> G2"										
<b>G4</b> 1 1/4" NPT										
<b>G5</b> 1 1/2" NPT										
<b>G6</b> 2" NPT										
<b>G7</b> SAE 20 - 1 5/8" - 12 UN										
<b>G8</b> SAE 24 - 1 7/8" - 12 UN										
<b>G9</b> SAE 32 - 2 1/2" - 12 UN										
<b>Filtration rating (filter media)</b>										
<b>A03</b> Inorganic microfiber 3 µm										
<b>A06</b> Inorganic microfiber 6 µm										
<b>A10</b> Inorganic microfiber 10 µm										
<b>A16</b> Inorganic microfiber 16 µm										
<b>A25</b> Inorganic microfiber 25 µm										
<b>M25</b> Wire mesh 25 µm										
<b>M60</b> Wire mesh 60 µm										
<b>M90</b> Wire mesh 90 µm										
<b>P10</b> Resin impregnated paper 10 µm										
<b>P25</b> Resin impregnated paper 25 µm										
<b>Element Δp</b>		Filter media								
		Axx	Mxx	Pxx						
<b>N</b> 10 bar			•	•						
<b>H</b> 10 bar			•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•							
				<b>Bypass valve</b>		<b>Execution</b>				
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard				
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized				

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MF400</b>   <b>1</b>   <b>A25</b>   <b>H</b>   <b>B</b>   <b></b>   <b>P01</b>								
<b>MF400</b> Filter element with standard spigot		Configuration example 2: <b>MF400</b>   <b>2</b>   <b>P10</b>   <b>N</b>   <b>V</b>   <b>E</b>   <b>P01</b>								
<b>Element length</b>										
<b>1</b>   <b>2</b>   <b>3</b>										
<b>Filtration rating (filter media)</b>										
<b>A03</b> Inorganic microfiber 3 µm										
<b>A06</b> Inorganic microfiber 6 µm										
<b>A10</b> Inorganic microfiber 10 µm										
<b>A16</b> Inorganic microfiber 16 µm										
<b>A25</b> Inorganic microfiber 25 µm										
<b>M25</b> Wire mesh 25 µm										
<b>M60</b> Wire mesh 60 µm										
<b>M90</b> Wire mesh 90 µm										
<b>P10</b> Resin impregnated paper 10 µm										
<b>P25</b> Resin impregnated paper 25 µm										
<b>Element Δp</b>		Filter media								
		Axx	Mxx	Pxx						
<b>N</b> 10 bar			•	•						
<b>H</b> 10 bar			•							
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•							
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>		
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard		
				<b>V</b> FPM		<b></b> 1.75 bar		<b>Pxx</b> Customized		

### ACCESSORIES

<b>Indicators</b>		page			page
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		page			
<b>Sxx</b> Extension tube		224			
<b>T5</b> Filler plug M30x1.5		225			

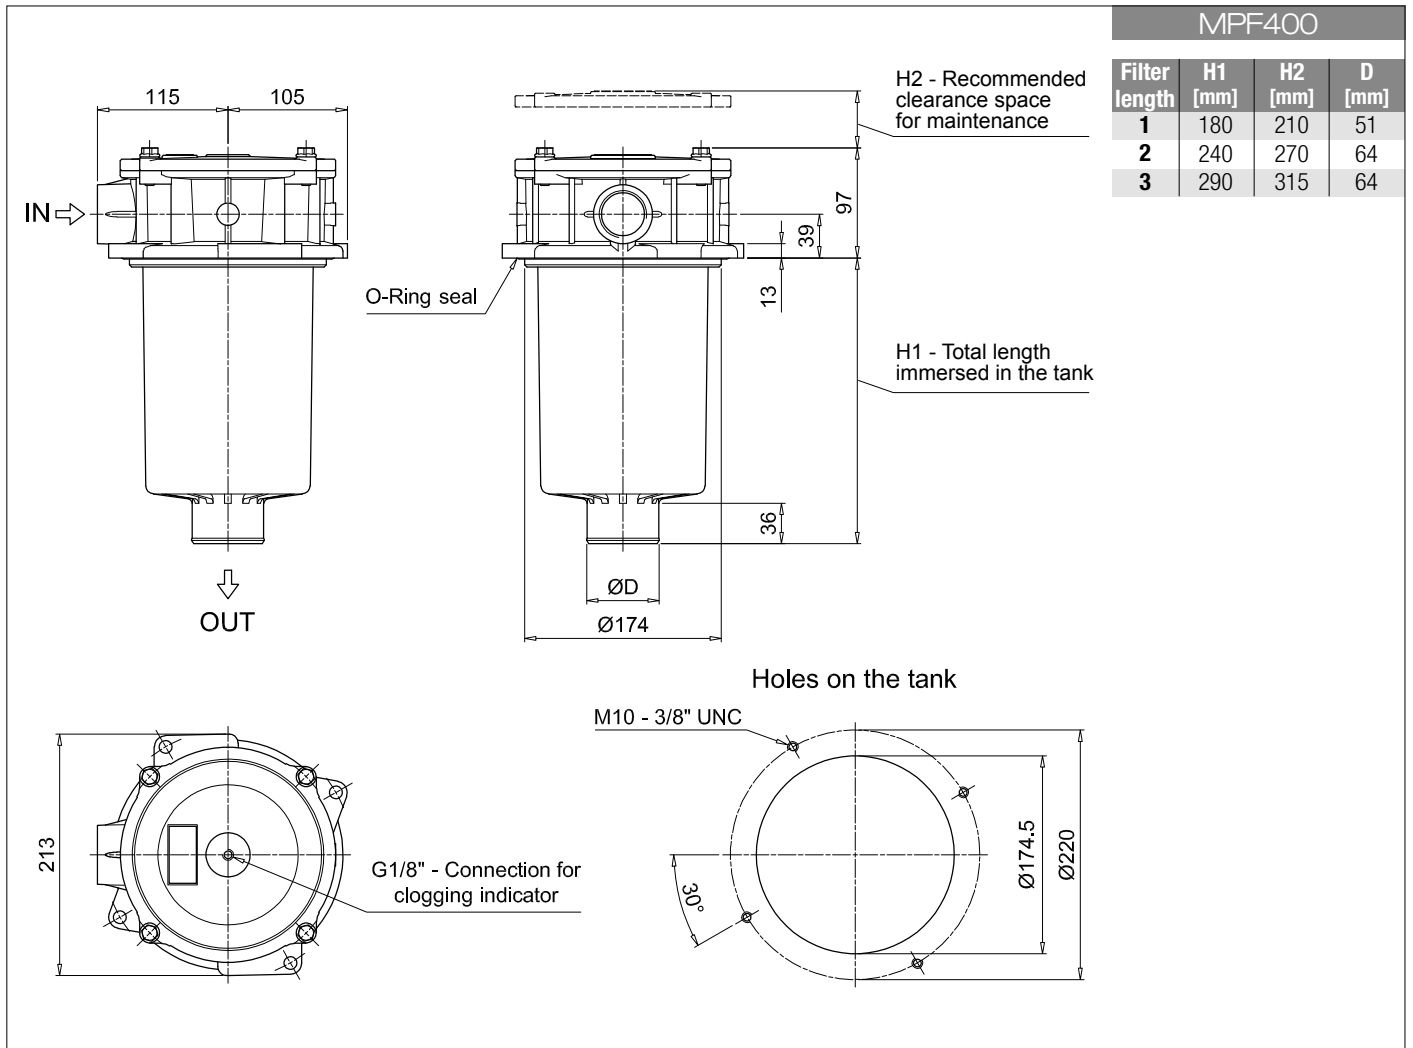

## Designation & Ordering code

### COMPLETE FILTER


<b>Series and size</b>	Configuration example 1:	MPF410	1	A	G9	1	A25	H	B	P01
<b>MPF410</b> Filter element with standard spigot	Configuration example 2:	MPF410	1	V	G4	1	P10	N	E	P01
<b>Length</b>										
1   2   3										
<b>Seals and treatments</b>										
A NBR										
V FPM										
W NBR head anodized										
Z FPM head anodized										
<b>Main Connections</b>										
<b>G1</b> G1 1/4"	Aux size 1									
<b>G4</b> 1 1/4" NPT	G1"									
<b>G7</b> SAE 20 - 1 5/8" - 12 UN	1" NPT									
		SAE 16 - 1 5/16" - 12 UN								
<b>Aux connection</b> - see previous table										
1 Aux size 1										
<b>Filtration rating (filter media)</b>										
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>	Filter media									
	Axx	Mxx	Pxx							
N 10 bar		•	•							
H 10 bar		•								
W 10 bar, compatible with fluids HFA, HFB and HFC	•	•								
				<b>Bypass valve</b>		<b>Execution</b>				
				E 3 bar		P01 MP Filtri standard				
				B 1.75 bar		Pxx Customized				

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1:	MF400	1	A25	H	B		P01	
<b>MF400</b> Filter element with standard spigot	Configuration example 2:	MF400	1	P10	N	V	E	P01	
<b>Element length</b>									
1   2   3									
<b>Filtration rating (filter media)</b>									
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm								
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm								
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm								
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm								
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm								
<b>Element Δp</b>	Filter media								
	Axx	Mxx	Pxx						
N 10 bar		•	•						
H 10 bar		•							
W 10 bar, compatible with fluids HFA, HFB and HFC	•	•							
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>	
				B NBR		E 3 bar		P01 MP Filtri standard	
				V FPM		1.75 bar		Pxx Customized	

### ACCESSORIES

<b>Indicators</b>	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
<b>Additional features</b>	page		
<b>Sxx</b> Extension tube	224		
<b>T5</b> Filler plug M30x1.5	225		

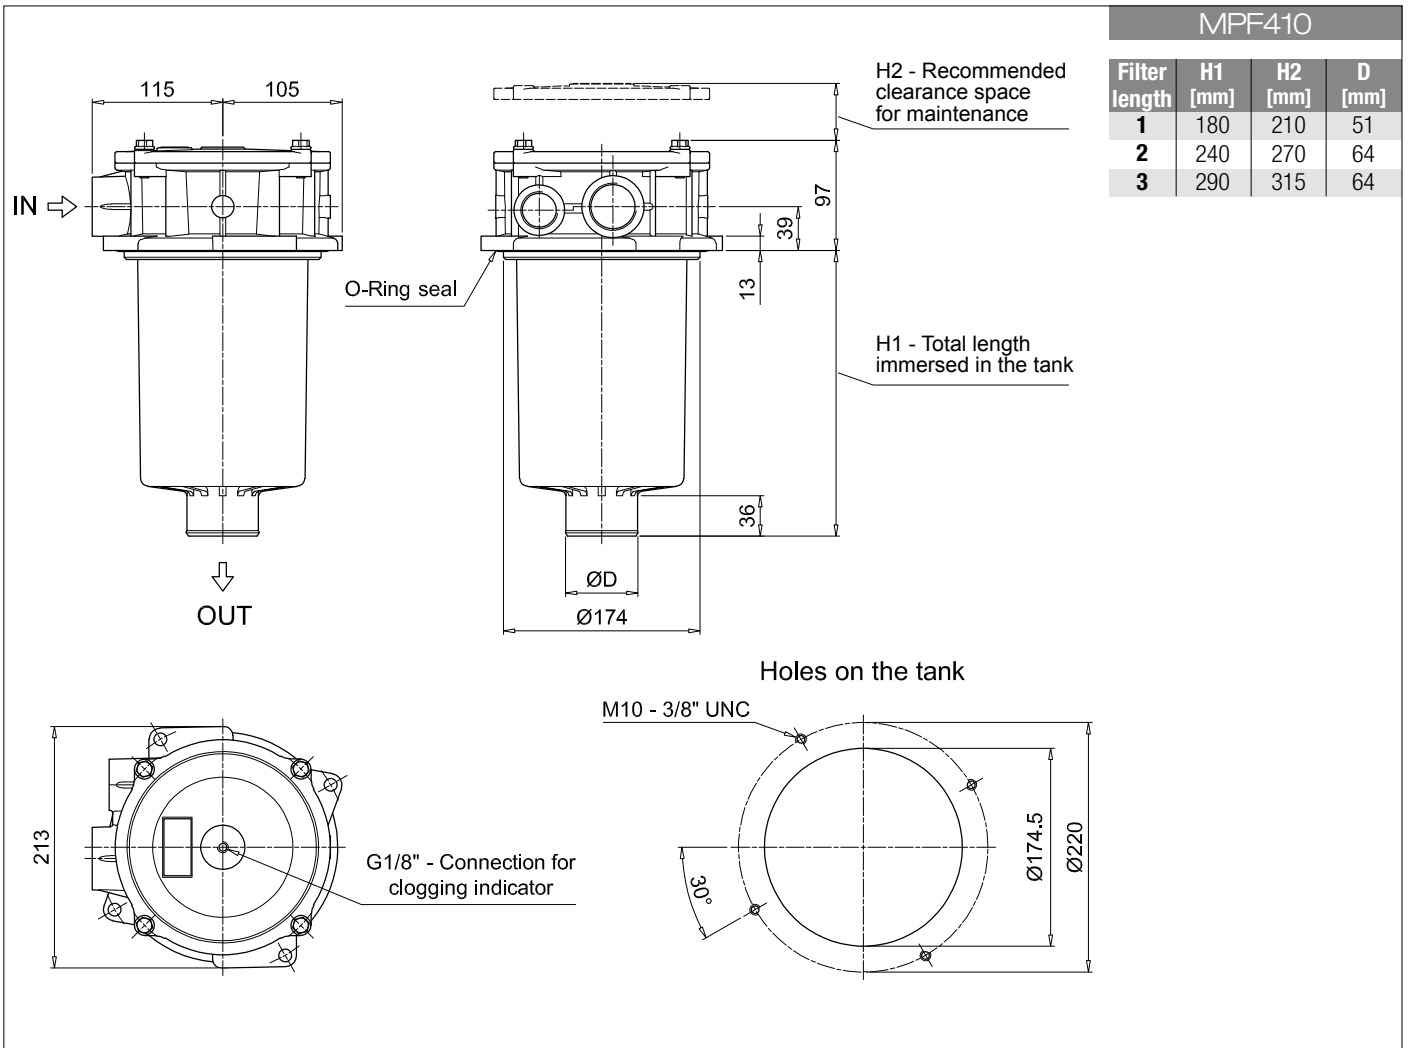

# MPF MPF450 - MPF451 - MPF750

## Designation & Ordering code

### COMPLETE FILTER

Series and size				Configuration example 1: <b>MPF450</b>   1   A   G1   A25   H   B   P01									
<b>MPF450</b>   <b>MPF451</b>   <b>MPF750</b> Filter element with standard spigot				Configuration example 2: <b>MPF750</b>   1   V   F   P10   N   E   P01									
Length		MPF 450	MPF 451	MPF 750									
1		•	•	•									
2		•	•										
3		•	•										
Seals and treatments													
<b>A</b> NBR		<b>W</b> NBR	head anodized										
<b>V</b> FPM		<b>Z</b> FPM	head anodized										
Connections		Aux (only size 451)											
<b>G1</b> G2"		G3/4"											
<b>G4</b> 2" NPT		3/4" NPT											
<b>G7</b> SAE 32 - 2 1/2" - 12 UN		SAE 12 - 1 1/16" - 12 UN											
<b>F1</b> 2" SAE 3000 psi/M		G3/4"											
<b>F2</b> 2" SAE 3000 psi/UN		3/4" NPT											
Filtration rating (filter media)													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
Element Δp		Filter media											
<b>N</b> 10 bar		Axx	Mxx	Pxx									
<b>H</b> 10 bar			•	•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•										
				<b>Bypass valve</b>		<b>Execution</b>							
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard							
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized							



### FILTER ELEMENT

Element series and size				Configuration example 1: <b>MF400</b>   1   A25   H   B   P01									
<b>MF400</b>   <b>MF750</b> Filter element with standard spigot				Configuration example 2: <b>MFX50</b>   1   P10   N   V   E   P01									
Element length		MPF 450	MPF 451	MPF 750									
1		•	•	•									
2		•	•										
3		•	•										
Filtration rating (filter media)													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
Element Δp		Filter media											
<b>N</b> 10 bar		Axx	Mxx	Pxx									
<b>H</b> 10 bar			•	•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•										
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>					
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard					
				<b>V</b> FPM		<b>B</b> 1.75 bar		<b>Pxx</b> Customized					

### ACCESSORIES



Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		
<b>Sxx</b> Extension tube	224		
<b>T5</b> Filler plug M30x1.5	225		



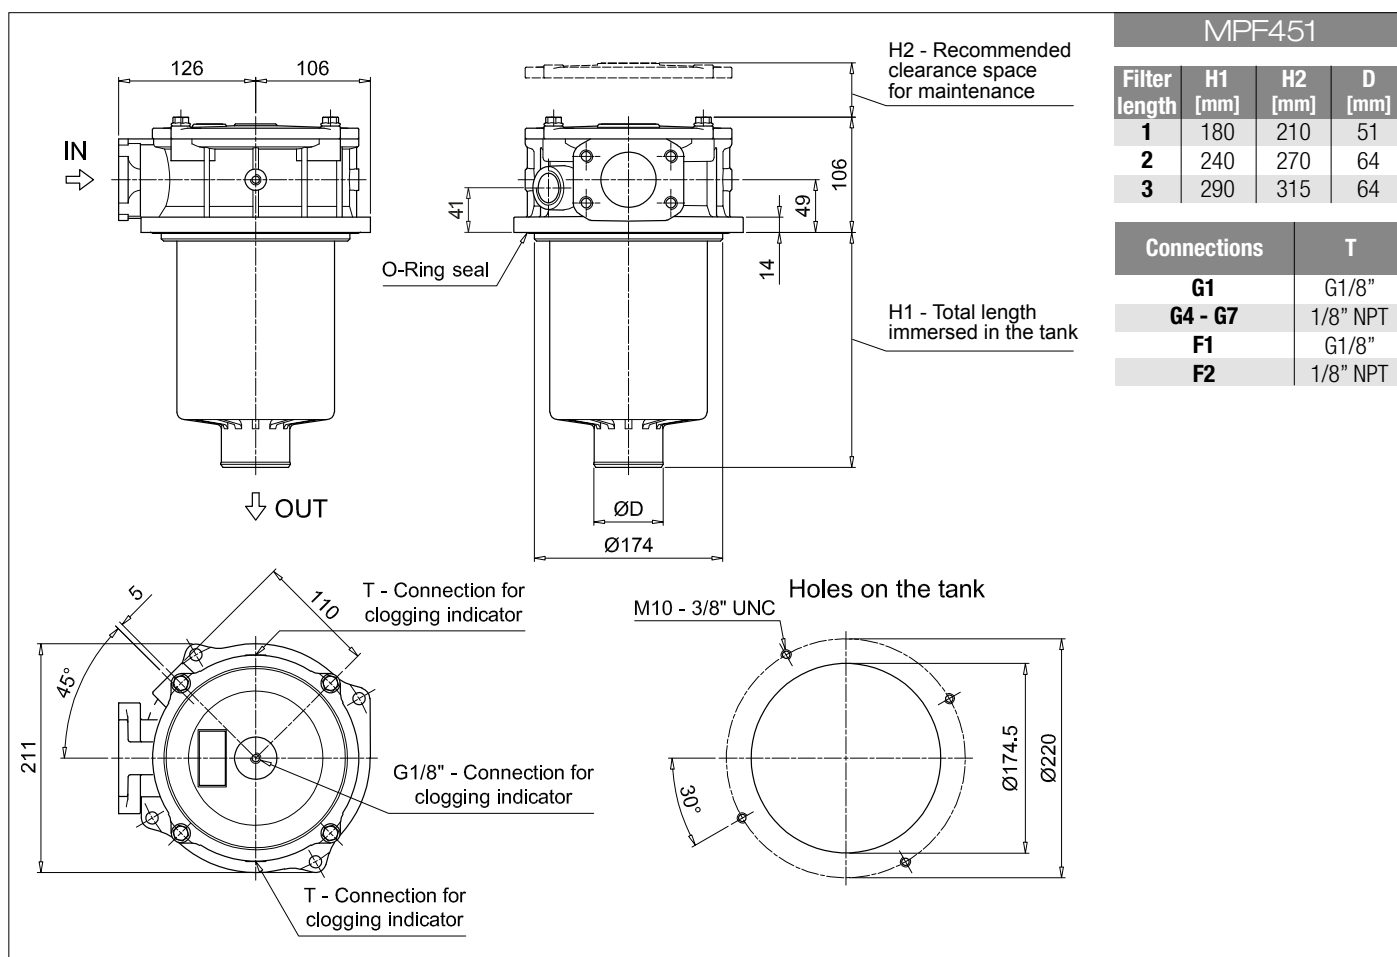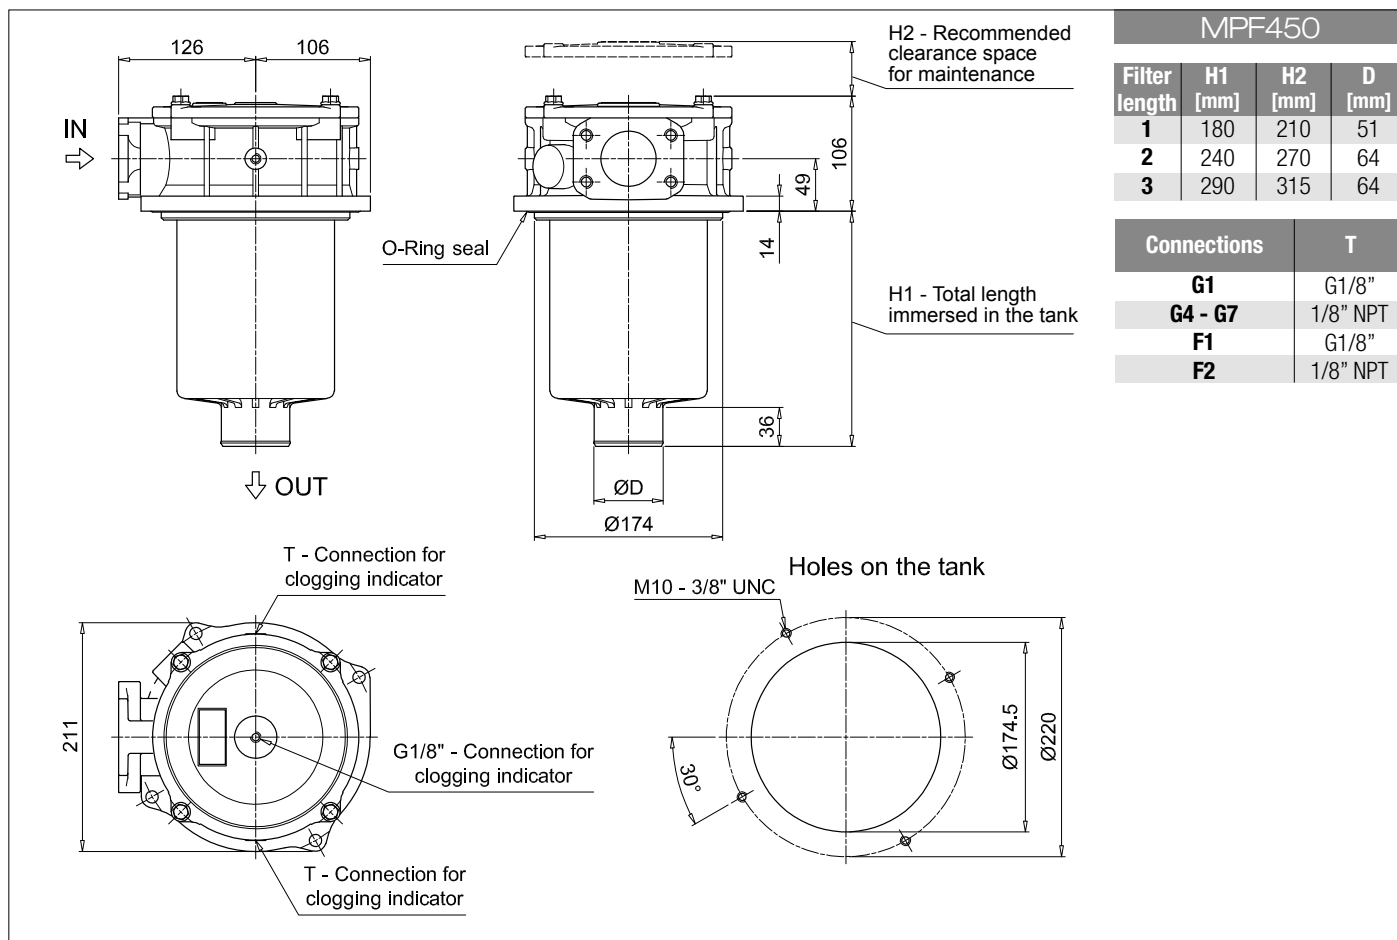

## Dimensions

MPF750

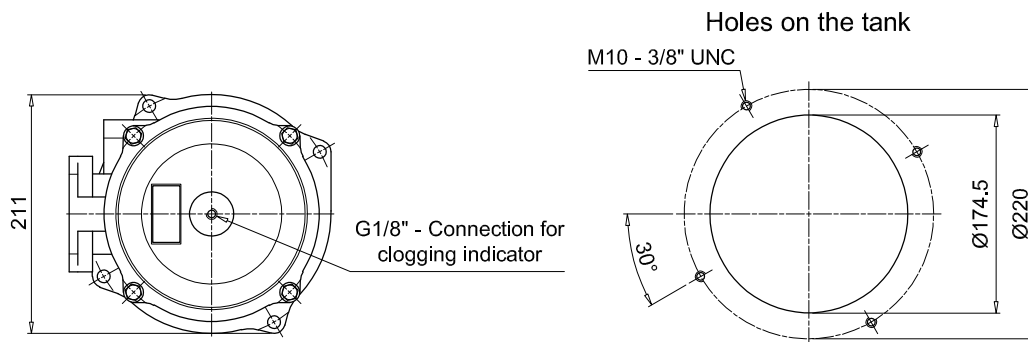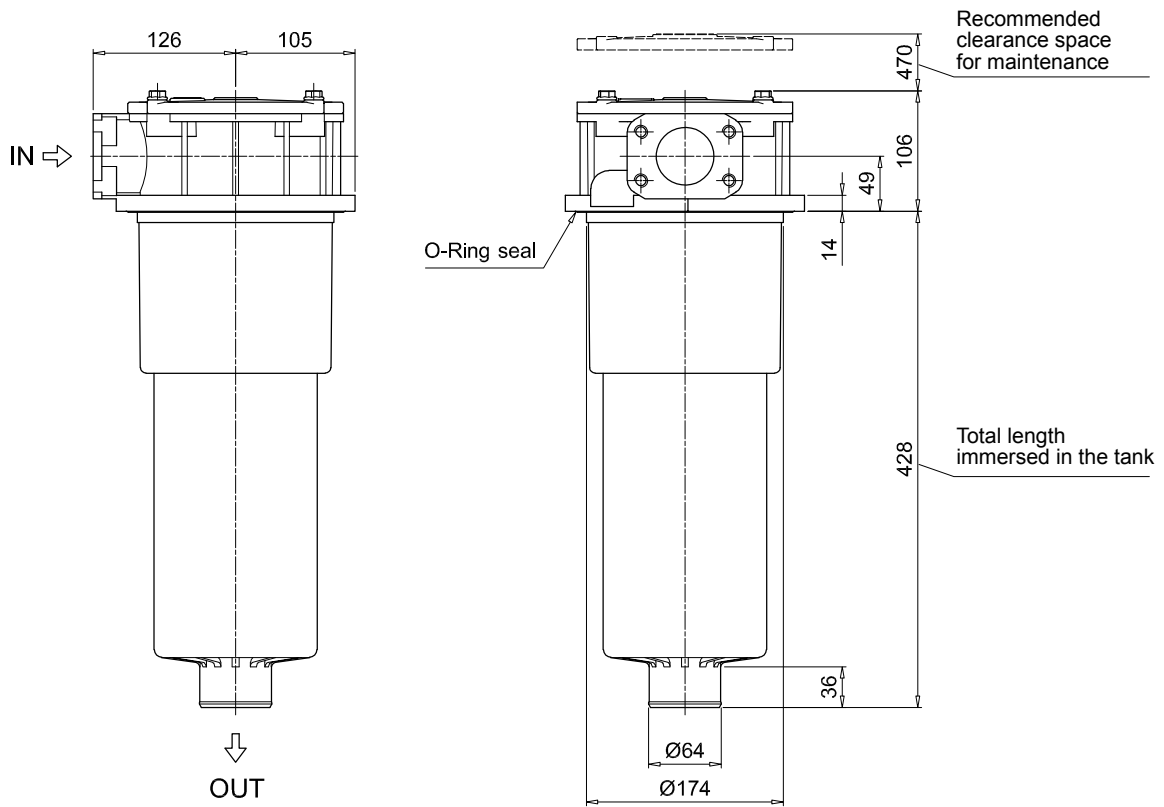

**MPF 100**

**MPF 181**

**O-RING SEAL**

Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3d)		
	Filter series	Filter element	Seal Kit code number NBR      FPM	
<b>MPF 030</b>	See order table		02050055	02050056
<b>MPF 100-110</b>			02050057	02050058
<b>MPF 181-182</b>			02050059	02050060
<b>MPF 184</b>			02050455	02050456
<b>MPF 191-192</b>			02050457	02050458
<b>MPF 194</b>			02050459	02050460
<b>MPF 400-410</b>			02050061	02050062
<b>MPF 450-451</b>			02050461	02050462
<b>MPF 750</b>			02050106	02050107

**MPF 104**

**MPF 181**

**FLAT SEAL**

Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3d)		
	Filter series	Filter element	Seal Kit code number NBR      FPM	
<b>MPF 020</b>	See order table		02050438	02050439
<b>MPF 104</b>			02050350	02050408
<b>MPF 181-182</b>			02050659	02050660
<b>MPF 191-192</b>			02050661	02050662



# MPT series

Maximum pressure up to 8 bar - Flow rate up to 300 l/min



## Technical data

**Return filter** Maximum pressure up to 8 bar - Flow rate up to 300 l/min

### Filter housing materials

- Head: Aluminium
- Cover: Nylon
- Bowl: Nylon

### Seals

- Standard NBR series A
- Optional FPM series V

### Pressure

Working pressure: 800 kPa (8 bar)

### Temperature

From -25 °C to +110 °C

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)
- Opening pressure 300 kPa (3 bar)

### Note

MPT filters are provided for vertical mounting

### Δp element type

- Microfibre filter elements - series H: 10 bar
- Fluid flow through the filter element from OUT to IN.







## Weights [kg] and volumes [dm<sup>3</sup>]

	Weights [kg]					Volumes [dm <sup>3</sup> ]				
	Length	1	2	3	4	Length	1	2	3	4
<b>MPT 025</b>		0.41	0.45	0.50	-		0.24	0.35	0.42	-
<b>MPT 027</b>		0.44	0.48	0.55	-		0.24	0.35	0.42	-
<b>MPT 101</b>		1.00	1.05	1.15	1.40		0.72	0.93	1.28	1.74
<b>MPT 104</b>		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74
<b>MPT 110-120</b>		1.00	1.05	1.15	1.40		0.72	0.93	1.28	1.74
<b>MPT 114</b>		1.10	1.15	1.25	1.50		0.72	0.93	1.28	1.74


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.

$\Delta p$  varies proportionally with density.

Filter housings  $\Delta p$  pressure drop

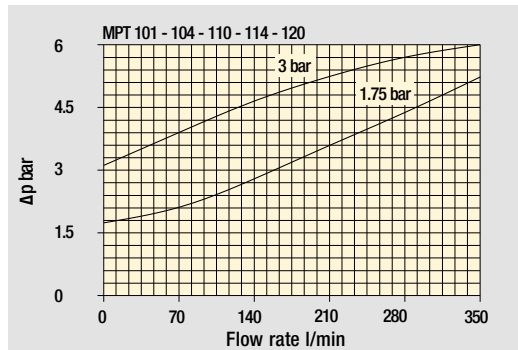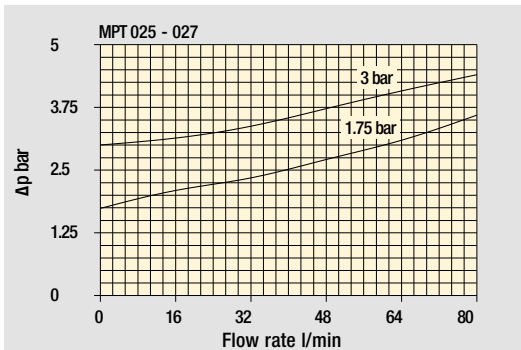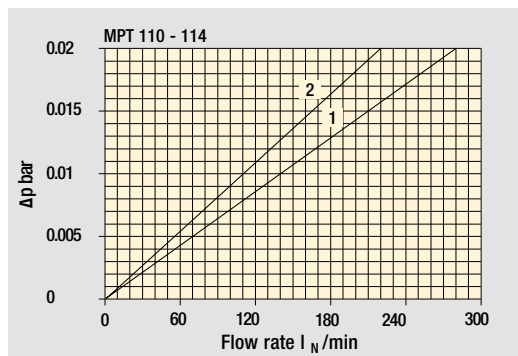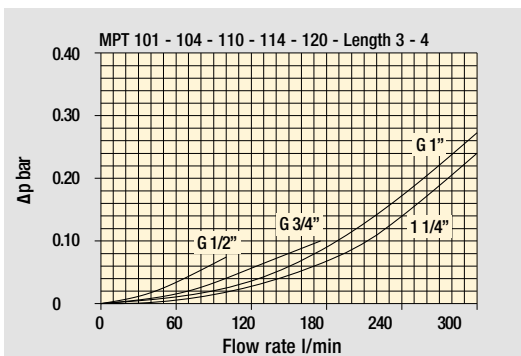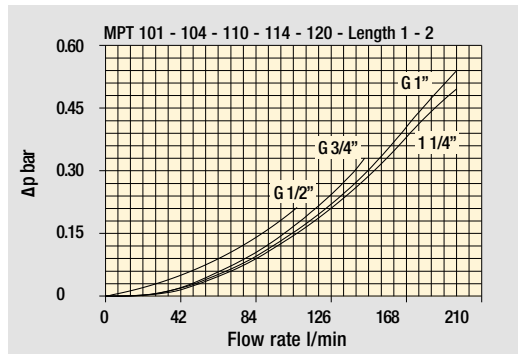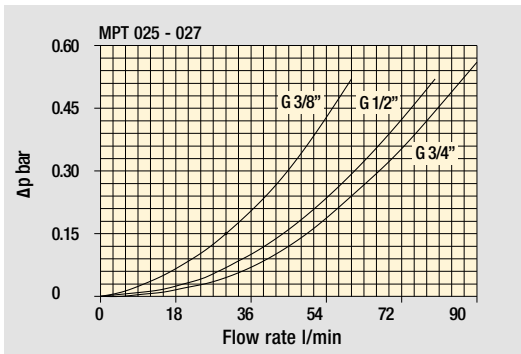


Bypass valve pressure drop

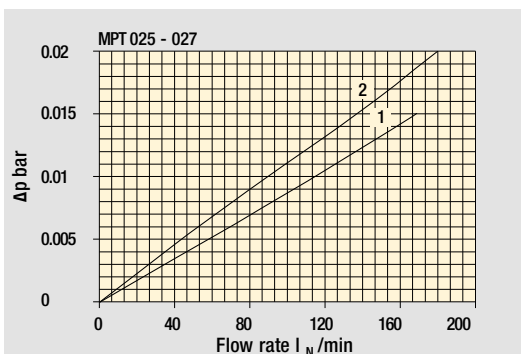


Air breather pressure drop

- 1  C With air breather 10  $\mu$ m
- 2  D With anti-splash and SAP50 10  $\mu$ m


Style  
1 connection

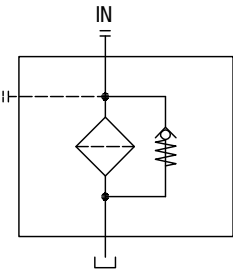

Style  
2 connections

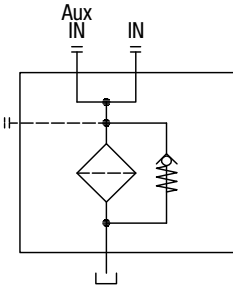

Style  
3 connections

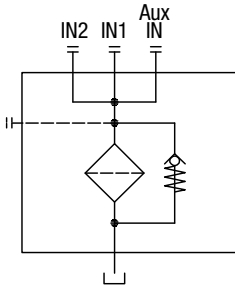



## Multifunction

### MPT 025 -027

Air breather port plugged  
Indicator port



Air breather standard  
Indicator port



Anti-splash air breather & pressurized  
Double indicator port



## Multiport - Multifunction

### MPT 110

Standard - Single IN Port



Double IN Port - Double indicator port



Double IN Port - Indicator port



Option:  
drain port

Double IN Port



Option:  
double drain port

### MPT 120

Triple IN port



Option:  
double drain port

# MPT MPT025 - MPT027

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>		Configuration example 1: <b>MPT025</b>   <b>1</b>   <b>S</b>   <b>A</b>   <b>G3</b>   <b>A10</b>   <b>E</b>   <b>P01</b>									
<b>MPT025</b>   <b>MPT027</b> Filter element with standard spigot		Configuration example 2: <b>MPT027</b>   <b>3</b>   <b>C</b>   <b>W</b>   <b>G6</b>   <b>A03</b>   <b>B</b>   <b>P01</b>									
<b>Length</b>											
<b>1</b>   <b>2</b>   <b>3</b>											
<b>Air breather</b>											
<b>S</b> Without air breather											
<b>C</b> With air breather 10 µm											
<b>D</b> With anti-splash and air breather SAP050 10 µm											
<b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar											
<b>Seals and treatments</b>		Filtration rating									
		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>							
<b>A</b> NBR		•	•	•							
<b>V</b> FPM		•	•	•							
<b>W</b> NBR head anodized		•	•								
<b>Z</b> FPM head anodized		•	•								
		filter element compatible with fluids HFA-HFB-HFC									
<b>Connections</b>											
<b>G1</b> G3/8"		<b>G6</b> 3/4" NPT									
<b>G2</b> G1/2"		<b>G7</b> SAE 6 - 9/16" - 18 UNF									
<b>G3</b> G3/4"		<b>G8</b> SAE 8 - 3/4" - 16 UNF									
<b>G4</b> 3/8" NPT		<b>G9</b> SAE 12 - 1 1/16" - 12 UN									
<b>G5</b> 1/2" NPT											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
				<b>Bypass valve</b>		<b>Execution</b>					
				<b>E</b> 3 bar		<b>P01</b> MP Filtri standard					
				<b>B</b> 1.75 bar		<b>Pxx</b> Customized					

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MF020</b>   <b>1</b>   <b>A10</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>									
<b>MF020</b> Filter element with standard spigot		Configuration example 2: <b>MF020</b>   <b>3</b>   <b>A03</b>   <b>H</b>   <b>W</b>   <b></b>   <b>P01</b>									
<b>Element length</b>											
<b>1</b>   <b>2</b>   <b>3</b>											
<b>Filtration rating (filter media)</b>											
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		Filter media									
		<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>							
<b>N</b> 10 bar			•	•							
<b>H</b> 10 bar		•									
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•								
				<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>			
				<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard			
				<b>V</b> FPM		<b></b> 1.75 bar		<b>Pxx</b> Customized			

### ACCESSORIES

<b>Indicators</b>		page			page
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		page			
<b>TE</b> Extension tube		224			
<b>DPT</b> Dipstick		225			

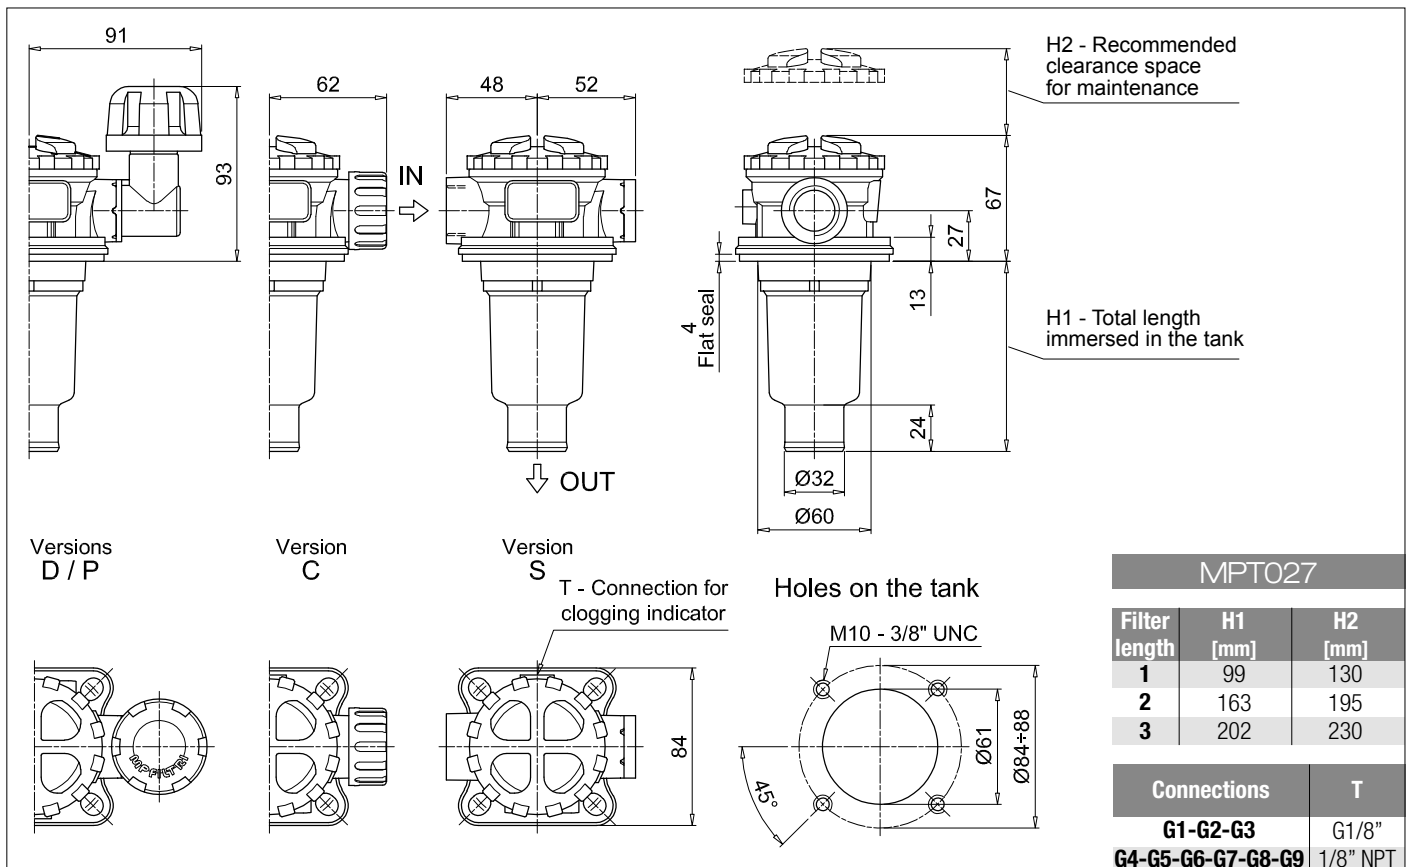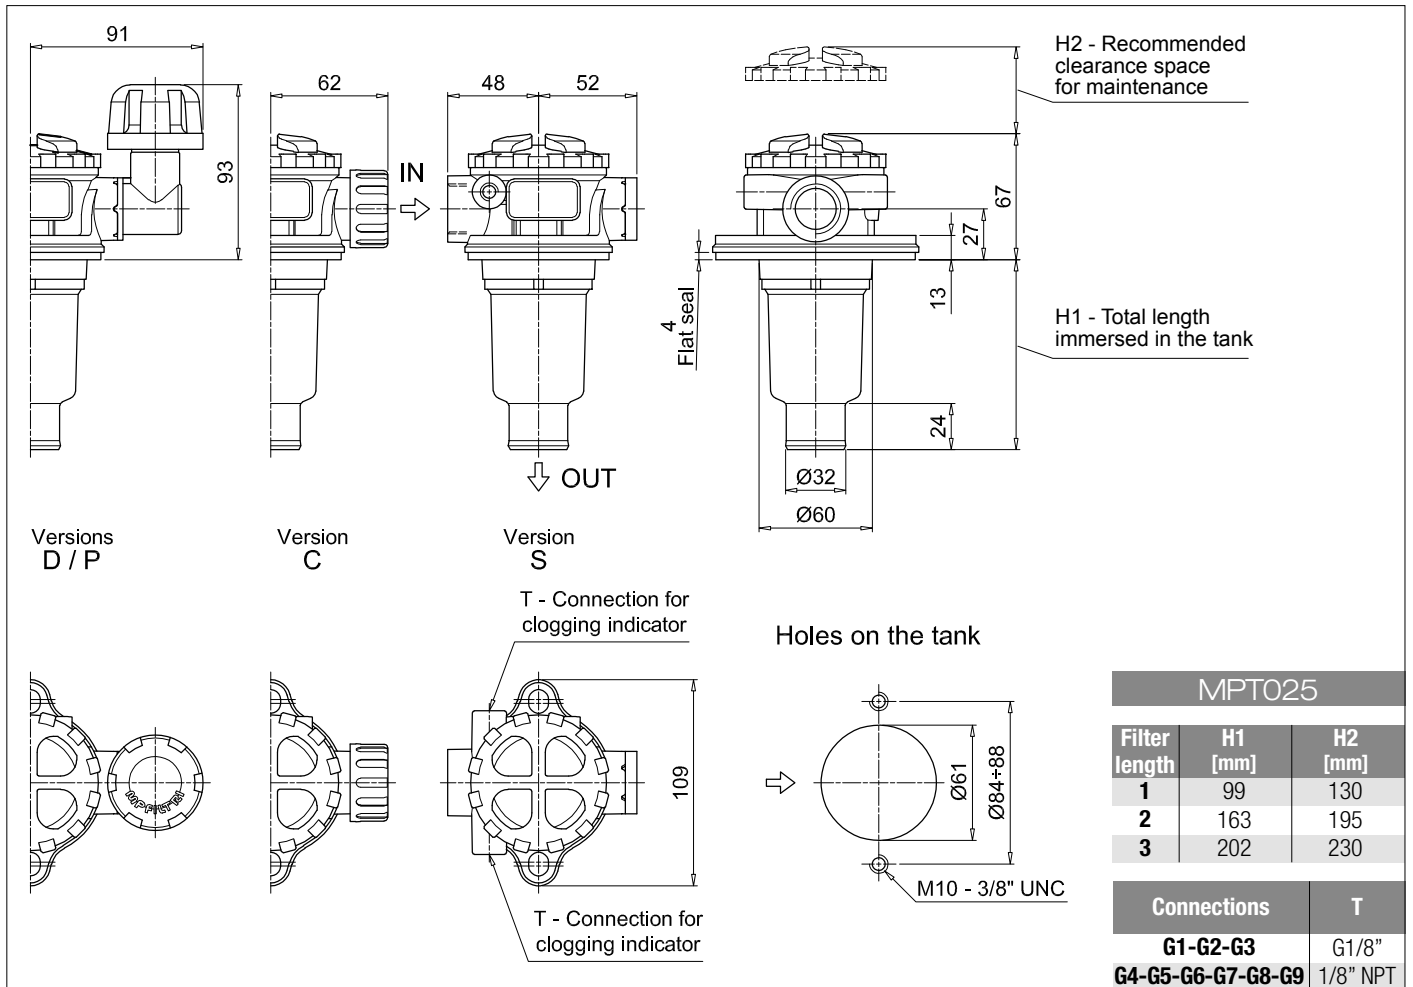

# MPT MPT101 - MPT104 - MPT114

## Designation & Ordering code

### COMPLETE FILTER


<b>Series and size</b>		Configuration example 1:		MPT101	4	S	A	G3	A10	E	P01		
<b>MPT101   MPT104   MPT114</b> Filter element with standard spigot		Configuration example 2:		MPT114	3	C	W	G6	A03	B	P01		
<b>Length</b>													
1   2   3   4													
<b>Air breather</b>													
<b>S</b> Without air breather													
<b>C</b> With air breather 10 µm													
<b>D</b> With anti-splash and air breather SAP050 10 µm													
<b>P</b> With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar													
<b>Seals and treatments</b>		<b>Filtration rating</b>											
		Axx			Mxx			Pxx					
<b>A</b> NBR		•			•			•					
<b>V</b> FPM		•			•			•					
<b>W</b> NBR head anodized		•			•			•			filter element compatible with fluids HFA-HFB-HFC		
<b>Z</b> FPM head anodized		•			•			•					
<b>Connections</b>													
<b>G1</b> G3/4"		<b>G6</b> 1 1/4" NPT											
<b>G2</b> G1"		<b>G7</b> SAE 12 - 1 1/16" - 12 UN											
<b>G3</b> G1 1/4"		<b>G8</b> SAE 16 - 1 5/16" - 12 UN											
<b>G4</b> 3/4" NPT		<b>G9</b> SAE 20 - 1 5/8" - 12 UN											
<b>G5</b> 1" NPT													
<b>Filtration rating (filter media)</b>													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
		<b>Bypass valve</b>		<b>Execution</b>									
		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard									
		<b>B</b> 1.75 bar		<b>Pxx</b> Customized									

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1:		MF100	4	A10	H	B	E	P01			
<b>MF100</b> Filter element with standard spigot		Configuration example 2:		MF100	3	A03	W	B		P01			
<b>Element length</b>													
1   2   3   4													
<b>Filtration rating (filter media)</b>													
<b>A03</b> Inorganic microfiber 3 µm		<b>M25</b> Wire mesh 25 µm											
<b>A06</b> Inorganic microfiber 6 µm		<b>M60</b> Wire mesh 60 µm											
<b>A10</b> Inorganic microfiber 10 µm		<b>M90</b> Wire mesh 90 µm											
<b>A16</b> Inorganic microfiber 16 µm		<b>P10</b> Resin impregnated paper 10 µm											
<b>A25</b> Inorganic microfiber 25 µm		<b>P25</b> Resin impregnated paper 25 µm											
<b>Element Δp</b>		<b>Filter media</b>											
		Axx			Mxx			Pxx					
<b>N</b> 10 bar		•			•			•					
<b>H</b> 10 bar		•			•			•					
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•			•			•					
		<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>							
		<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard							
		<b>V</b> FPM		<b>B</b> 1.75 bar		<b>Pxx</b> Customized							

### ACCESSORIES


<b>Indicators</b>		page		page	
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215		
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215		
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216		
<b>BVQ</b> Visual pressure indicator with manual reset	217				
<b>Additional features</b>		page		page	
<b>TE</b> Extension tube	224	<b>DPT</b> Dipstick	225		
<b>DFS</b> Diffuser with fast lock connection	225				

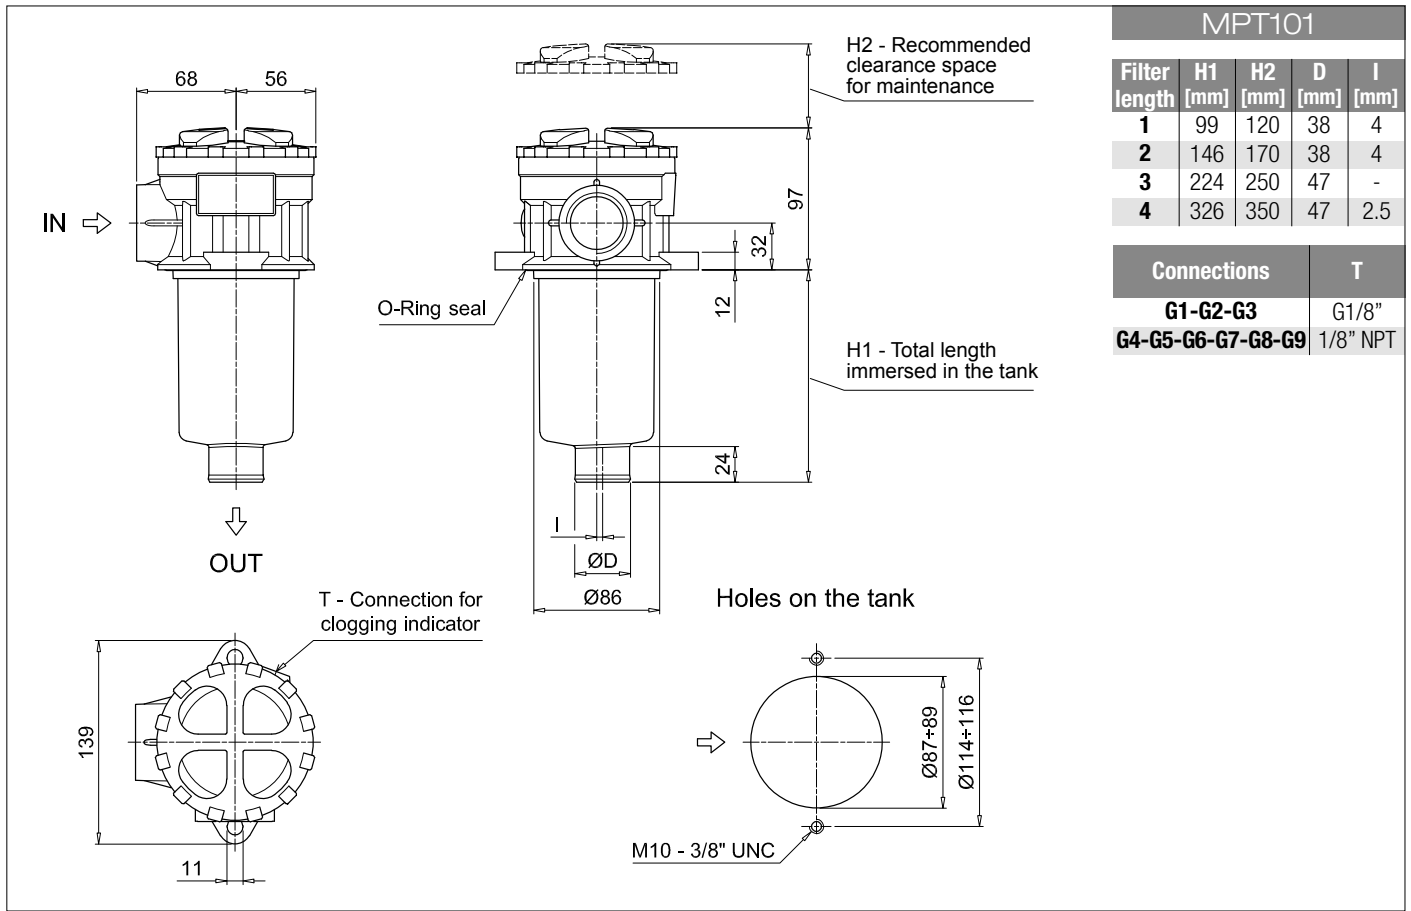

MPT101				
Filter length	H1 [mm]	H2 [mm]	D [mm]	I [mm]
1	99	120	38	4
2	146	170	38	4
3	224	250	47	-
4	326	350	47	2.5

Connections	T
<b>G1-G2-G3</b>	G1/8"
<b>G4-G5-G6-G7-G8-G9</b>	1/8" NPT

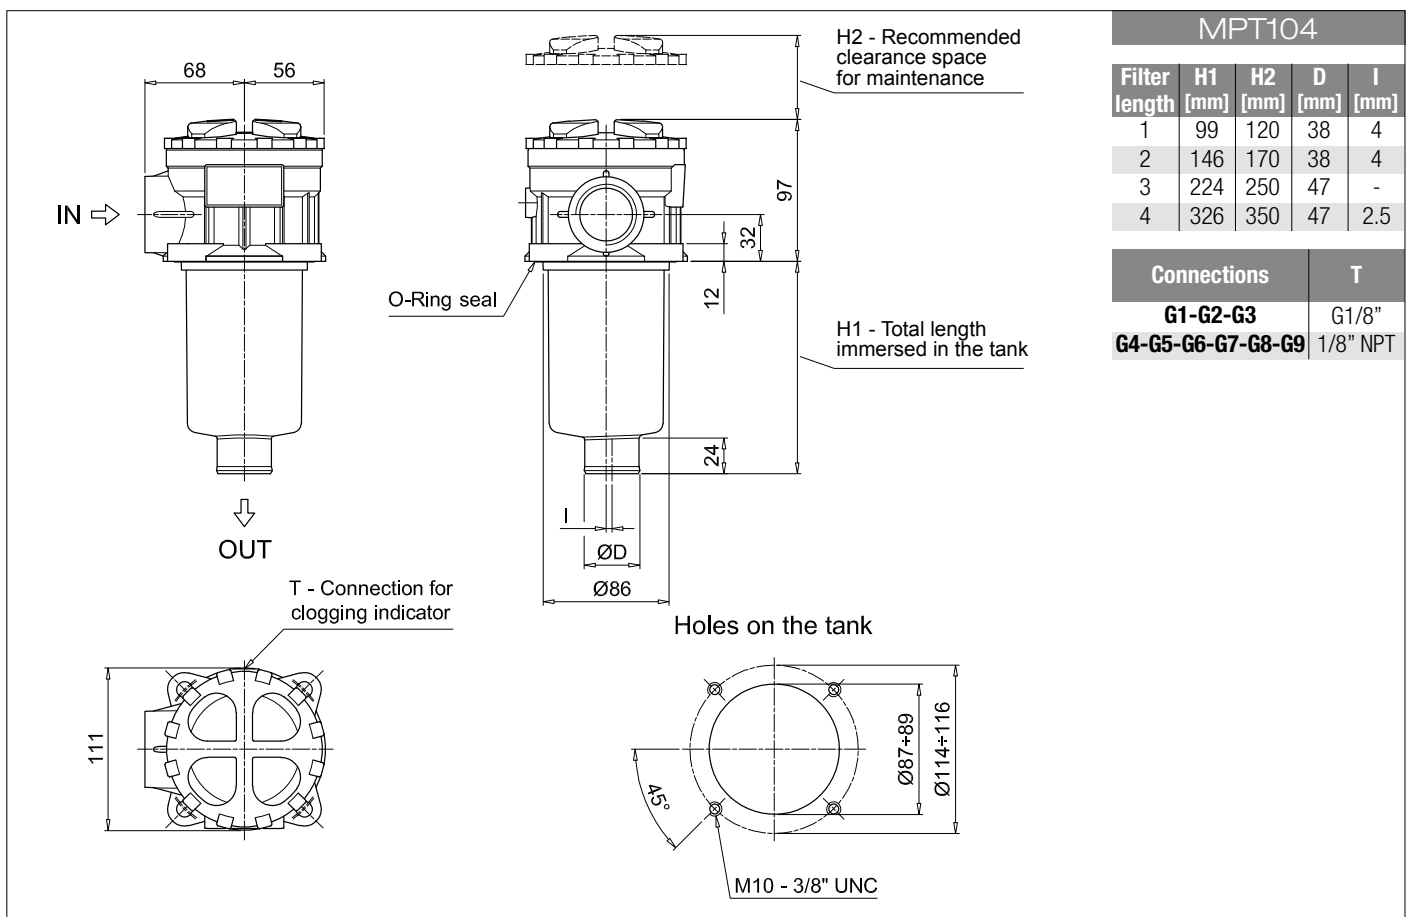

MPT104				
Filter length	H1 [mm]	H2 [mm]	D [mm]	I [mm]
1	99	120	38	4
2	146	170	38	4
3	224	250	47	-
4	326	350	47	2.5

Connections	T
<b>G1-G2-G3</b>	G1/8"
<b>G4-G5-G6-G7-G8-G9</b>	1/8" NPT


# MPT MPT101 - MPT104 - MPT114

## Dimensions

### MPT114

Filter length	H1 [mm]	H2 [mm]	D [mm]	I [mm]
1	97	120	38	4
2	144	170	38	4
3	222	250	47	-
4	324	350	47	2.5

Connections	T
G1-G2-G3	G1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT

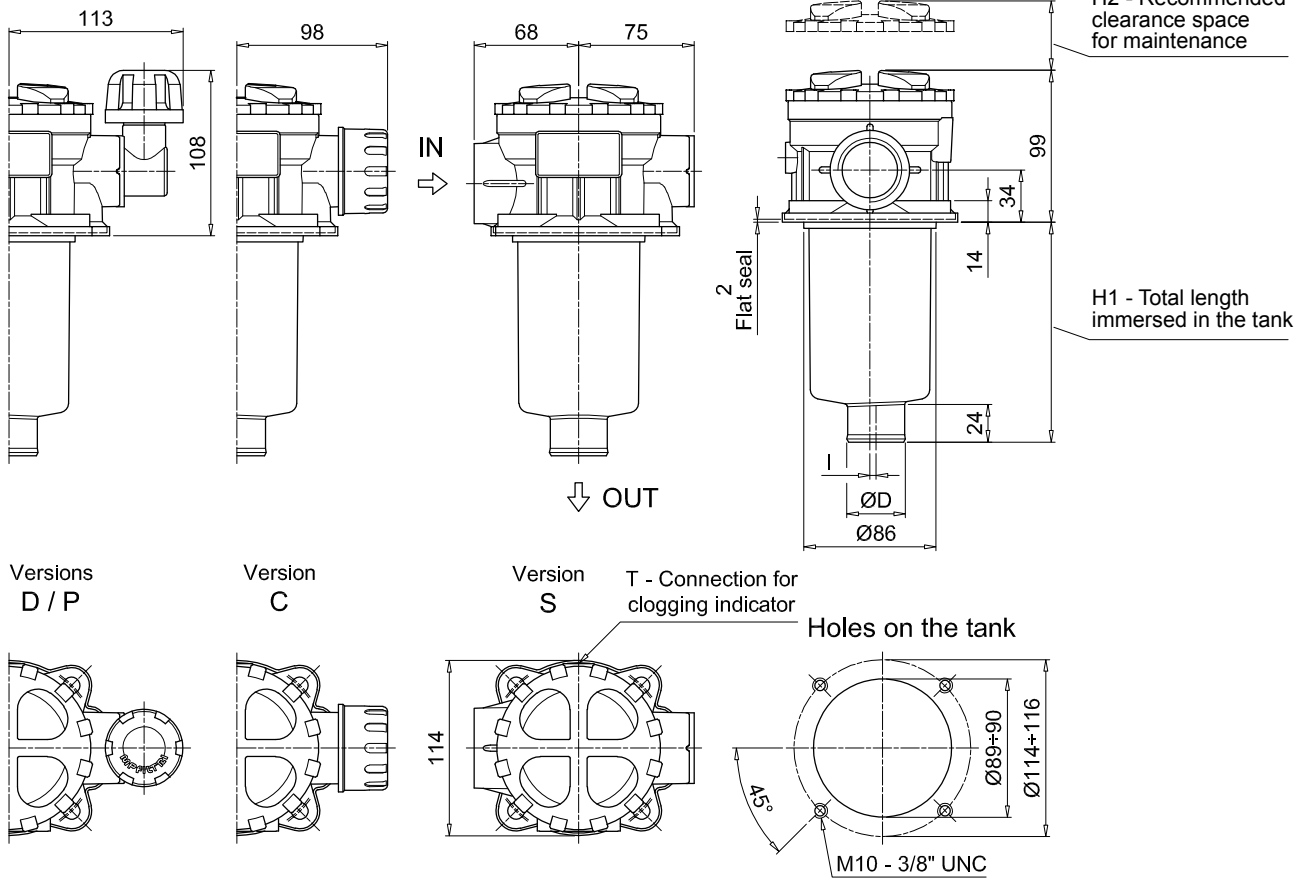



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>		Configuration example 1: <b>MPT110</b>   <b>1</b>   <b>S</b>   <b>A</b>   <b>G1</b>   <b>0</b>   <b>A06</b>   <b>E</b>   <b>P01</b>										
<b>MPT110</b> Filter element with standard spigot		Configuration example 2: <b>MPT110</b>   <b>3</b>   <b>P</b>   <b>V</b>   <b>G4</b>   <b>1</b>   <b>M25</b>   <b>B</b>   <b>P01</b>										
<b>Length</b>												
1   2   3   4												
<b>Air breather</b>												
<b>S</b> Without air breather												
<b>C</b> With air breather 10 µm												
<b>D</b> With anti-splash and air breather SAP050 10 µm												
<b>P</b> With anti-splash and air breather SAP050 10 µm, pressurization 0.5 bar												
<b>Seals and treatments</b>		Filtration rating										
		Axx	Mxx	Pxx								
<b>A</b> NBR		•	•	•								
<b>V</b> FPM		•	•	•								
<b>W</b> NBR head anodized		•	•		filter element compatible with fluids HFA-HFB-HFC							
<b>Z</b> FPM head anodized		•	•									
<b>Main Connections</b>		<b>Aux size 1</b>		<b>Aux size 2</b>		<b>Main Connections</b>		<b>Aux size 2</b>		<b>Aux size 2</b>		
<b>G1</b> G3/4"		G3/8"		G1/2"		<b>G6</b> 1 1/4" NPT		3/8" NPT		1/2" NPT		
<b>G2</b> G1"						<b>G7</b> SAE 12 - 1 1/16" - 12 UN		SAE 6 - 9/16" - 18 UNF		SAE 8 - 3/4" - 16 UNF		
<b>G3</b> G1 1/4"						<b>G8</b> SAE 16 - 1 5/16" - 12 UN						
<b>G4</b> 3/4" NPT		3/8" NPT		1/2" NPT		<b>G9</b> SAE 20 - 1 5/8" - 12 UN						
<b>G5</b> 1" NPT												
<b>Aux connection</b> - see previous table												
0 Not machined   1 Aux size 1   2 Aux size 2												
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm			<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm			<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm			<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm			<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm			<b>P25</b> Resin impregnated paper 25 µm									
						<b>Bypass valve</b>		<b>Execution</b>				
						<b>E</b> 3 bar		<b>P01</b> MP Filtri standard				
						<b>B</b> 1.75 bar		<b>Pxx</b> Customized				

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: <b>MF100</b>   <b>1</b>   <b>A06</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>										
<b>MF100</b> Filter element with standard spigot		Configuration example 2: <b>MF100</b>   <b>3</b>   <b>M25</b>   <b>N</b>   <b>V</b>   <b>P01</b>										
<b>Element length</b>												
1   2   3   4												
<b>Filtration rating (filter media)</b>												
<b>A03</b> Inorganic microfiber 3 µm			<b>M25</b> Wire mesh 25 µm									
<b>A06</b> Inorganic microfiber 6 µm			<b>M60</b> Wire mesh 60 µm									
<b>A10</b> Inorganic microfiber 10 µm			<b>M90</b> Wire mesh 90 µm									
<b>A16</b> Inorganic microfiber 16 µm			<b>P10</b> Resin impregnated paper 10 µm									
<b>A25</b> Inorganic microfiber 25 µm			<b>P25</b> Resin impregnated paper 25 µm									
<b>Element Δp</b>		Filter media										
		Axx	Mxx	Pxx								
<b>N</b> 10 bar			•	•								
<b>H</b> 10 bar		•										
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC		•	•									
						<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>		
						<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard		
						<b>V</b> FPM		1.75 bar		<b>Pxx</b> Customized		

### ACCESSORIES


<b>Indicators</b>		page			page
<b>BVA</b> Axial pressure gauge		216	<b>BEA</b> Electrical pressure indicator		215
<b>BVR</b> Radial pressure gauge		216	<b>BEM</b> Electrical pressure indicator		215
<b>BVP</b> Visual pressure indicator with automatic reset		217	<b>BLA</b> Electrical / visual pressure indicator		215-216
<b>BVQ</b> Visual pressure indicator with manual reset		217			
<b>Additional features</b>		page			page
<b>TE</b> Extension tube		224	<b>DPT</b> Dipstick		225
<b>DFS</b> Diffuser with fast lock connection		225			



MPT110				
Filter length	H1 [mm]	H2 [mm]	D [mm]	I [mm]
<b>1</b>	97	120	38	4
<b>2</b>	144	170	38	4
<b>3</b>	222	250	47	-
<b>4</b>	324	350	47	2.5

Connections	T
<b>G1-G2-G3</b>	G1/8"
<b>G4-G5-G6-G7-G8-G9</b>	1/8" NPT

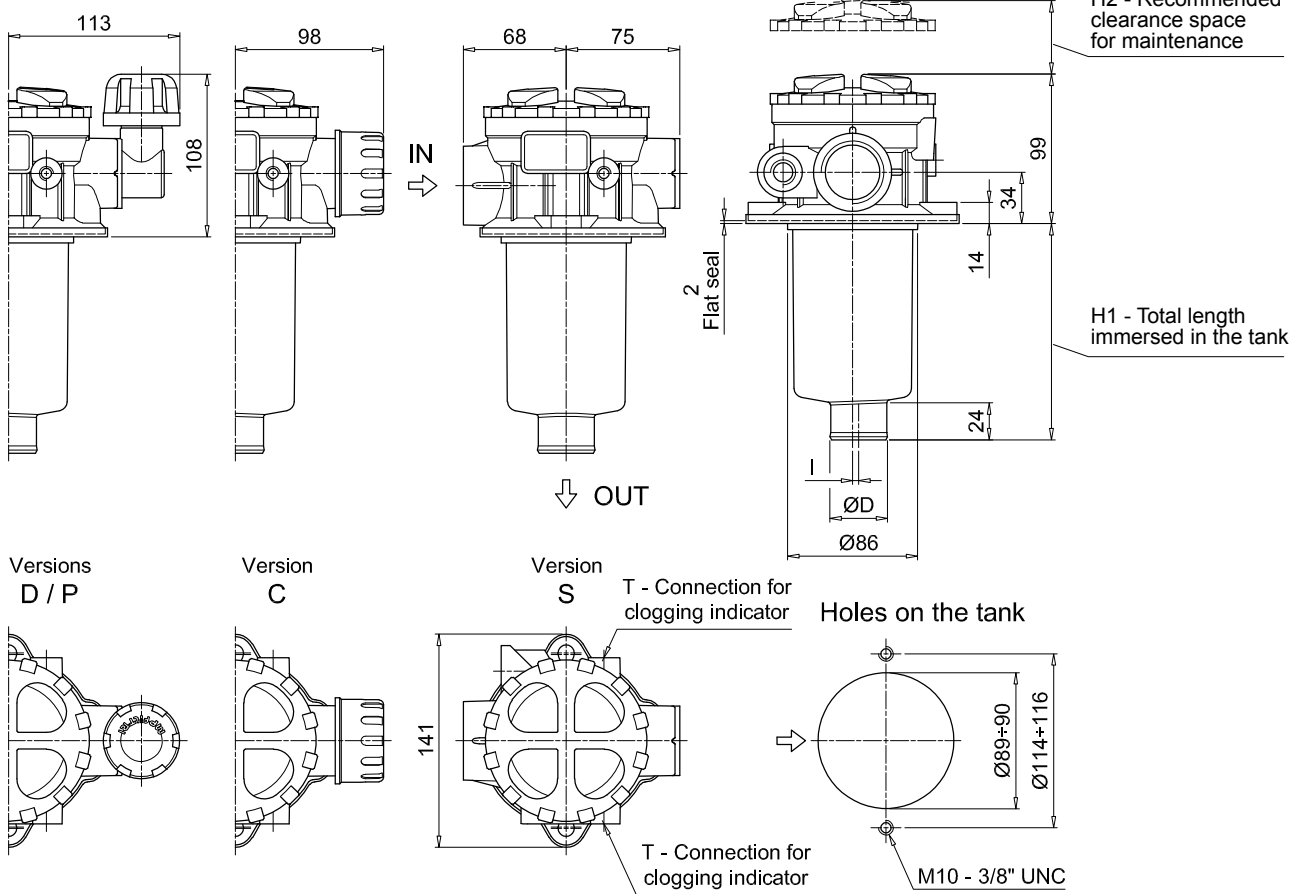

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1:	MPT120	1	A	G1	0	A06	E	P01
<b>MPT120</b> Filter element with standard spigot	Configuration example 2:	MPT120	3	V	G4	1	M25	B	P01

<b>Length</b>	1	2	3	4
---------------	---	---	---	---

Seals and treatments	Filtration rating		
	Axx	Mxx	Pxx
<b>A</b> NBR	•	•	•
<b>V</b> FPM	•	•	•
<b>W</b> NBR head anodized	•	•	•
<b>Z</b> FPM head anodized	•	•	•

Main Connections	Rear connections	Aux size 1	Aux size 2
<b>G1</b> G3/4"	G3/4"	G3/8"	G1/2"
<b>G2</b> G1"	G1"		
<b>G3</b> G1 1/4"	G3/4"		
<b>G4</b> 3/4" NPT	3/4" NPT	3/8" NPT	1/2" NPT
<b>G5</b> 1" NPT	1" NPT		
<b>G6</b> 1 1/4" NPT	3/4" NPT	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF
<b>G7</b> SAE 12 - 1 1/16" - 12 UN	SAE 12 - 1 1/16" - 12 UN		
<b>G8</b> SAE 16 - 1 5/16" - 12 UN	SAE 16 - 1 5/16" - 12 UN		
<b>G9</b> SAE 20 - 1 5/8" - 12 UN	SAE 12 - 1 1/16" - 12 UN		

<b>Aux connection</b> - see previous table	0	1	2
Not machined	Aux size 1	Aux size 2	

Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Bypass valve	Execution
<b>E</b> 3 bar	<b>P01</b> MP Filtri standard
<b>B</b> 1.75 bar	<b>Pxx</b> Customized

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1:	MF100	1	A06	H	B	E	P01
<b>MF100</b> Filter element with standard spigot	Configuration example 2:	MF100	3	M25	N	V		P01

<b>Element length</b>	1	2	3	4
-----------------------	---	---	---	---


Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Element Δp	Filter media		
	Axx	Mxx	Pxx
<b>N</b> 10 bar		•	•
<b>H</b> 10 bar	•		
<b>W</b> 10 bar, compatible with fluids HFA, HFB and HFC	•	•	

Seals	Bypass valve	Execution
<b>B</b> NBR	<b>E</b> 3 bar	<b>P01</b> MP Filtri standard
<b>V</b> FPM	1.75 bar	<b>Pxx</b> Customized

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		page
<b>TE</b> Extension tube	224	<b>DPT</b> Dipstick	225
<b>DFS</b> Diffuser with fast lock connection	225		

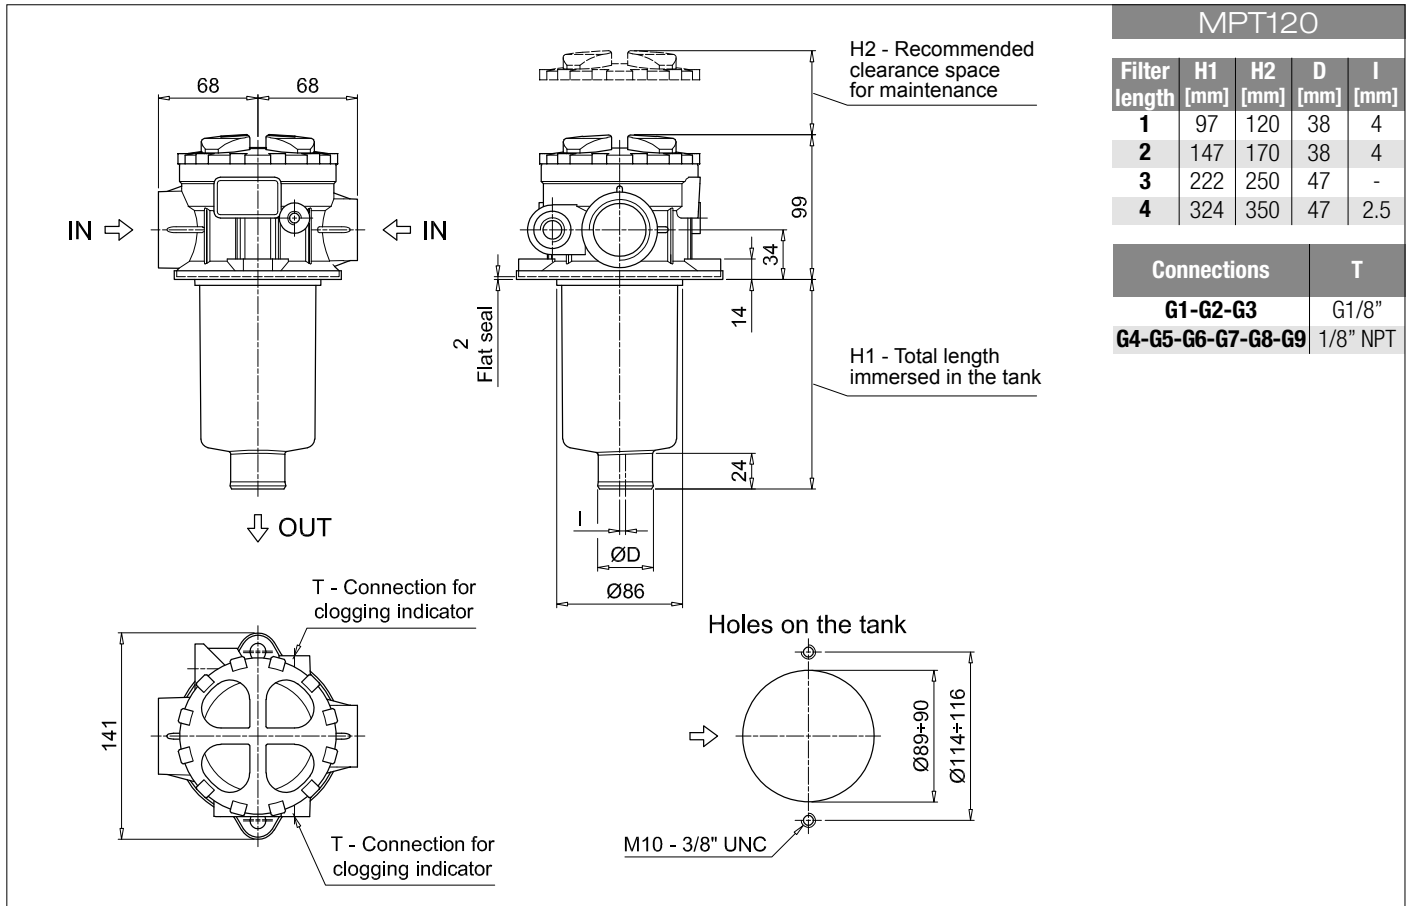

MPT120				
Filter length	H1 [mm]	H2 [mm]	D [mm]	I [mm]
1	97	120	38	4
2	147	170	38	4
3	222	250	47	-
4	324	350	47	2.5


  

Connections	T
G1-G2-G3	G1/8"
G4-G5-G6-G7-G8-G9	1/8" NPT


# MPT SPARE PARTS

Order number for spare parts

MPT 025 - 027 - 110

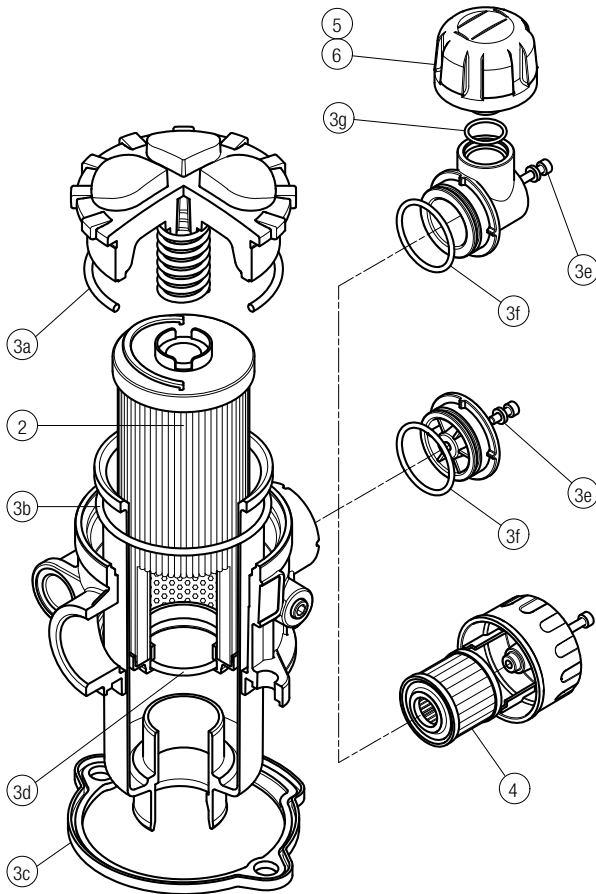


MPT 101S - 104S

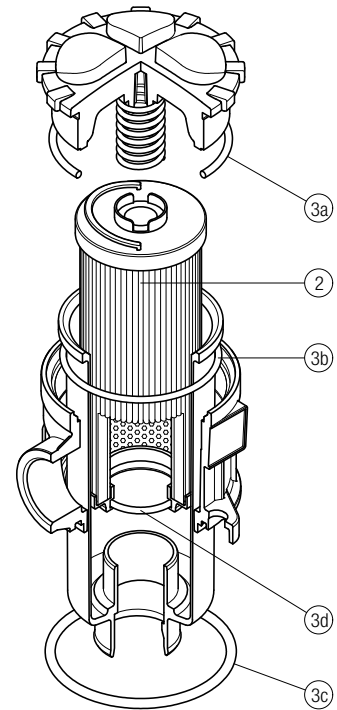


Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number	Air breather filter element - version:			
		NBR	FPM	C	D	P
MPT 025	See order table	02050557	02050558	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01
MPT 027		02050559	02050560	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01
MPT 110		02050561	02050562	10 µm A5L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
MPT 101S-104S	See order table	02050466	02050467

**MPT 114**

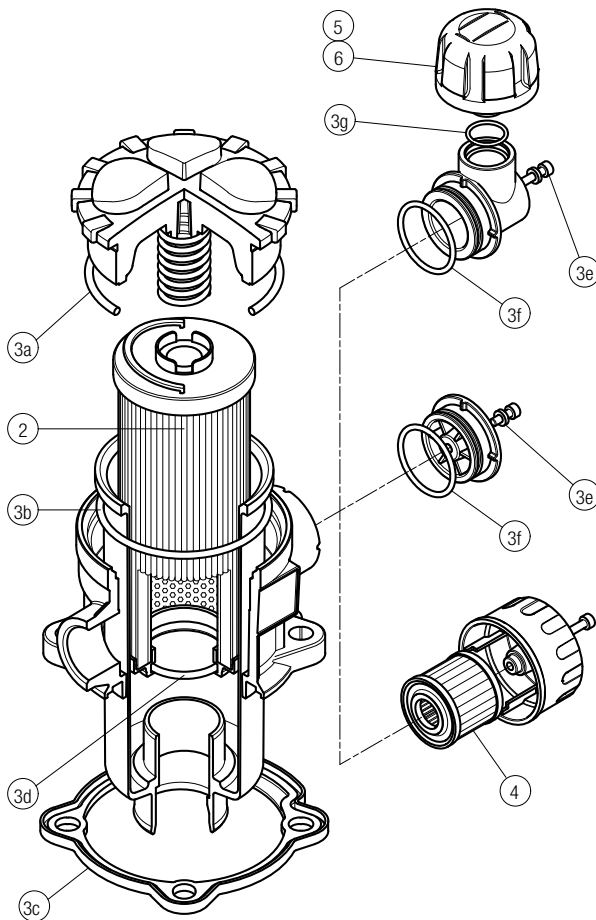

**MPT 120**

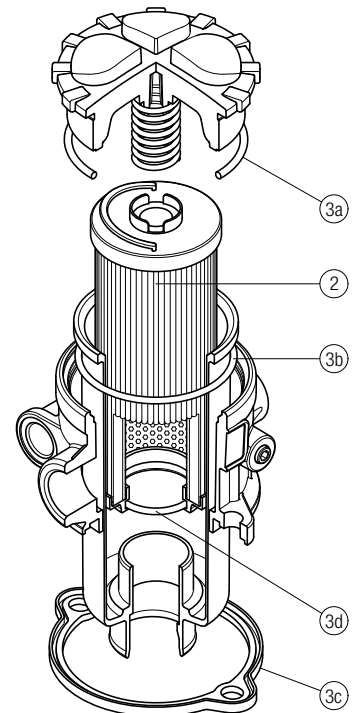

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number NBR	FPM	Air breather filter element - version:		
				C	D	P
<b>MPT 114</b>	See order table	02050580	02050581	10 µm A3L03	10 µm SAP50G3L03A0P01	10 µm SAP50G3L03A1P01

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number NBR	FPM
<b>MPT 120</b>	See order table	02050563	02050564



# MFB series

BOWL ASSEMBLY



## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>						Configuration example 1: <b>MFB100</b>   <b>1</b>   <b>A</b>   <b>2</b>   <b>A10</b>   <b>H</b>   <b>E</b>   <b>P01</b>					
<b>MFB020</b>	<b>MFB030</b>	<b>MFB100</b>	<b>MFB180</b>	<b>MFB190</b>		Configuration example 2: <b>MFB180</b>   <b>2</b>   <b>V</b>   <b>1</b>   <b>M25</b>   <b>N</b>   <b>B</b>   <b>P01</b>					
Filter element with private spigot											
<b>Length</b>		MFB020	MFB030	MFB100	MFB180	MFB190					
1		•	•	•	•						
2		•		•	•	•					
3		•		•							
4				•							
<b>Seals</b>											
<b>A</b> NBR											
<b>V</b> FPM											
<b>Version</b>		MFB020	MFB030	MFB100	MFB180	MFB190					
1	Without cover	•	•	•	•	•					
2	With flanged cover type MPF		•	•	•	•					
3	With threaded cover type MPT	•		•							
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber 3 µm										
<b>A06</b>	Inorganic microfiber 6 µm										
<b>A10</b>	Inorganic microfiber 10 µm										
<b>A16</b>	Inorganic microfiber 16 µm										
<b>A25</b>	Inorganic microfiber 25 µm										
<b>M25</b>	Wire mesh 25 µm										
<b>M60</b>	Wire mesh 60 µm										
<b>M90</b>	Wire mesh 90 µm										
<b>P10</b>	Resin impregnated paper 10 µm										
<b>P25</b>	Resin impregnated paper 25 µm										
<b>Element Δp</b>				Filter media							
				Axx	Mxx	Pxx					
<b>N</b>	10 bar				•	•					
<b>H</b>	10 bar				•						
<b>W</b>	10 bar, compatible with fluids HFA, HFB and HFC			•	•						
						<b>Bypass valve</b>		<b>Execution</b>			
						<b>E</b> 3 bar		<b>P01</b> MP Filtri standard			
						<b>B</b> 1.75 bar		<b>Pxx</b> Customized			


### FILTER ELEMENT

<b>Element series and size</b>						Configuration example 1: <b>MF100</b>   <b>1</b>   <b>A10</b>   <b>H</b>   <b>B</b>   <b>E</b>   <b>P01</b>					
<b>MF020</b>	<b>MF030</b>	<b>MF100</b>	<b>MF180</b>	<b>MF190</b>		Configuration example 2: <b>MF180</b>   <b>2</b>   <b>M25</b>   <b>N</b>   <b>V</b>   <b></b>   <b>P01</b>					
Filter element with private spigot											
<b>Element length</b>		MF020	MF030	MF100	MF180	MF190					
1		•	•	•	•						
2		•		•	•	•					
3		•		•							
4				•							
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber 3 µm										
<b>A06</b>	Inorganic microfiber 6 µm										
<b>A10</b>	Inorganic microfiber 10 µm										
<b>A16</b>	Inorganic microfiber 16 µm										
<b>A25</b>	Inorganic microfiber 25 µm										
<b>M25</b>	Wire mesh 25 µm										
<b>M60</b>	Wire mesh 60 µm										
<b>M90</b>	Wire mesh 90 µm										
<b>P10</b>	Resin impregnated paper 10 µm										
<b>P25</b>	Resin impregnated paper 25 µm										
<b>Element Δp</b>				Filter media							
				Axx	Mxx	Pxx					
<b>N</b>	10 bar				•	•					
<b>H</b>	10 bar				•						
						<b>Seals</b>		<b>Bypass valve</b>		<b>Execution</b>	
						<b>B</b> NBR		<b>E</b> 3 bar		<b>P01</b> MP Filtri standard	
						<b>V</b> FPM		<b></b> 1.75 bar		<b>Pxx</b> Customized	

### ACCESSORIES

<b>Additional features</b>											page	
		MFB020	MFB030	MFB100	MFB180	MFB190						
<b>TE</b>	Extension tube	•	•	•	•	•						224
<b>DFS</b>	Diffuser with fast lock connection			•								225




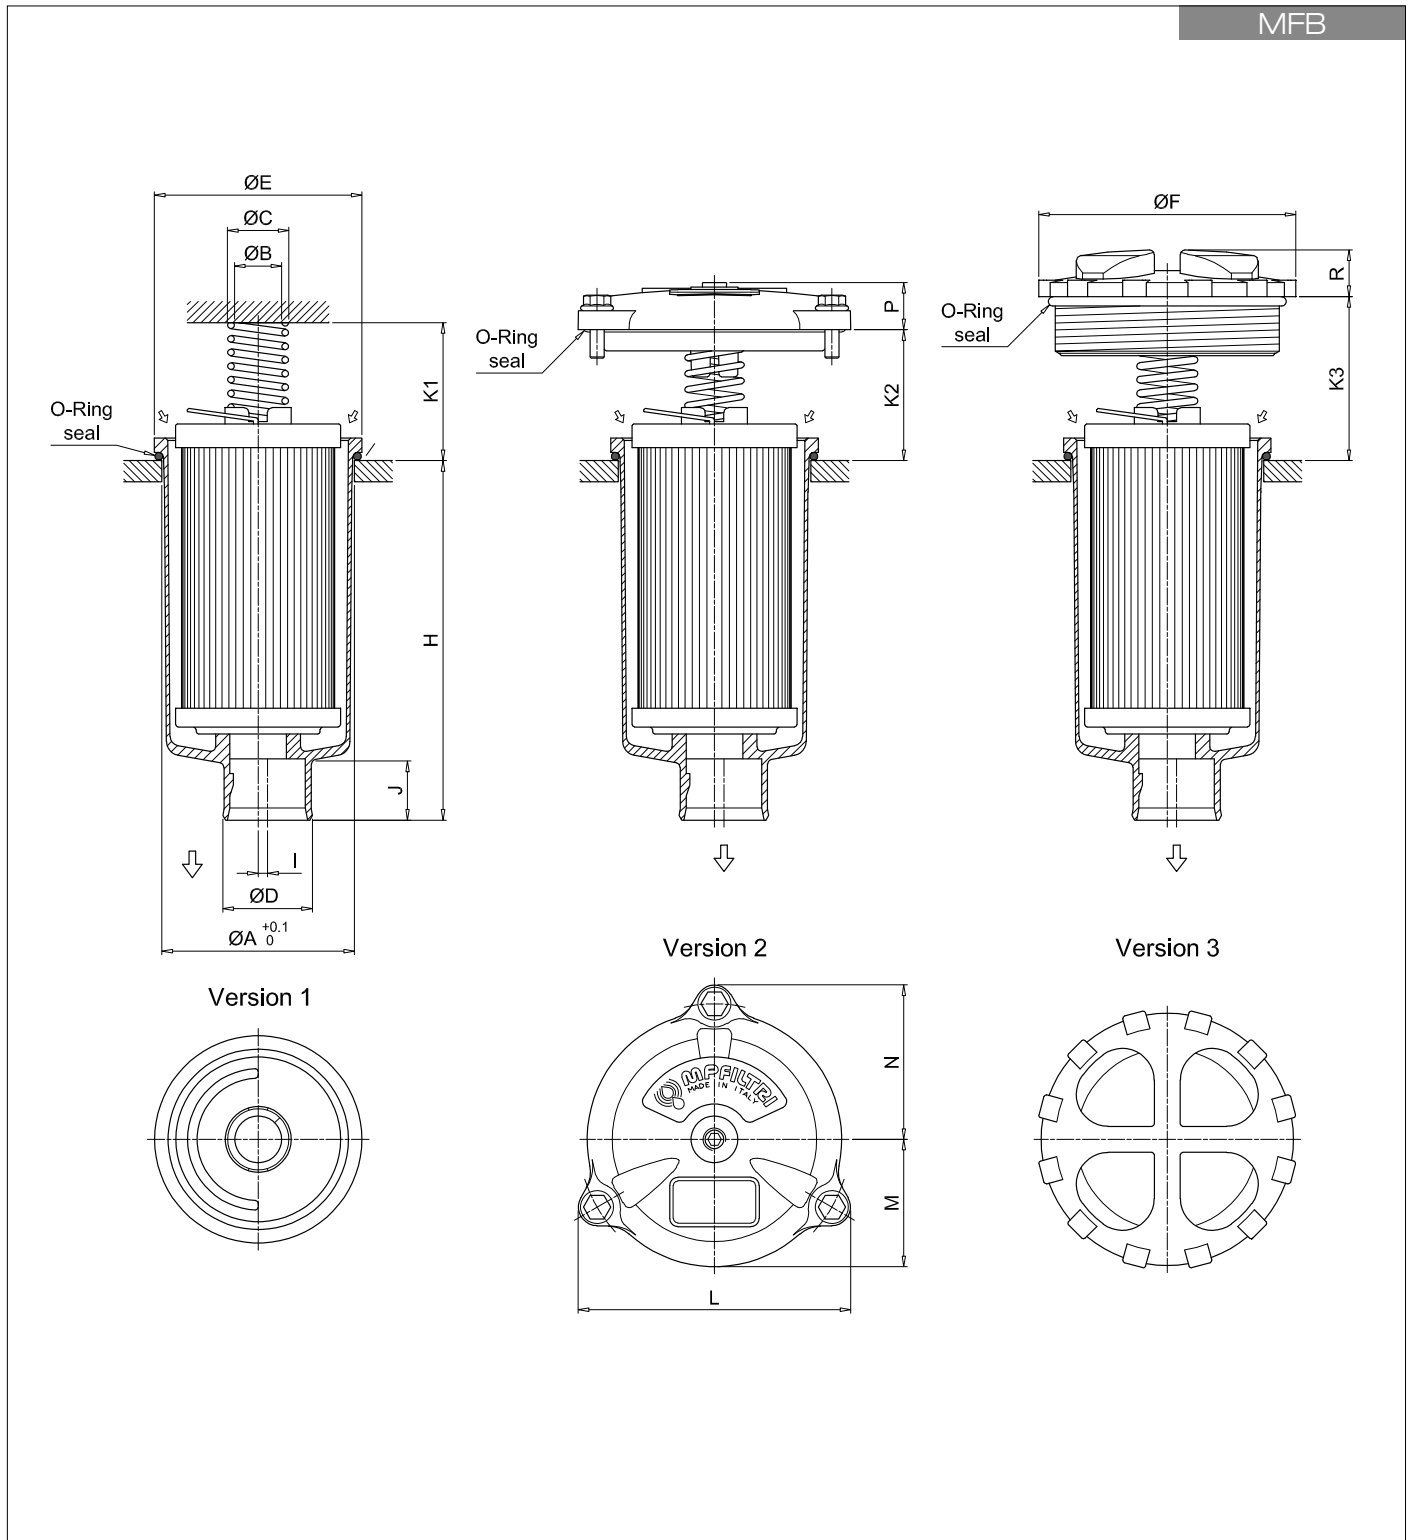


Filter size	Filter length	ø A [mm]	ø B [mm]	ø C [mm]	ø D [mm]	ø E [mm]	ø F [mm]	H [mm]	I [mm]	J [mm]	K1 [mm]	K2 [mm]	K3 [mm]	L [mm]	M [mm]	N [mm]	P [mm]	R [mm]
<b>020</b>	1	52	20.5	26	32	56	75	111	0	24	42	-	36	-	-	-	-	18
	2	52	20.5	26	32	56	75	175	0	24	42	-	36	-	-	-	-	18
	3	52	20.5	26	32	56	75	214	0	24	42	-	36	-	-	-	-	18
<b>030</b>	1	60.5	20	25.5	32	68	-	92	3	21	33	35	-	92	42	52	18	-
	1	80.5	20	26	38	88	111	107	4	24	58	55	69	116	54	66	20	20
	2	80.5	20	26	38	88	111	154	4	24	58	55	69	116	54	66	20	20
	3	80.5	20	26	47	88	111	232	0	24	58	55	69	116	54	66	20	20
<b>180</b>	4	80.5	20	26	47	88	111	334	2.5	24	58	55	69	116	54	66	20	20
	1	112.5	26	33.5	47	121	-	234	0	31	58	58	69	159	76	95	21	-
	2	112.5	26	33.5	47	121	-	447	0	31	58	58	69	159	76	95	21	-
<b>190</b>	2	112.5	26	33.5	50	121	-	454	0	38	58	58	69	159	76	95	21	-

# MFB GENERAL INFORMATION

## Hydraulic symbol

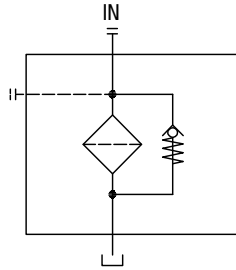

## Order number for spare parts

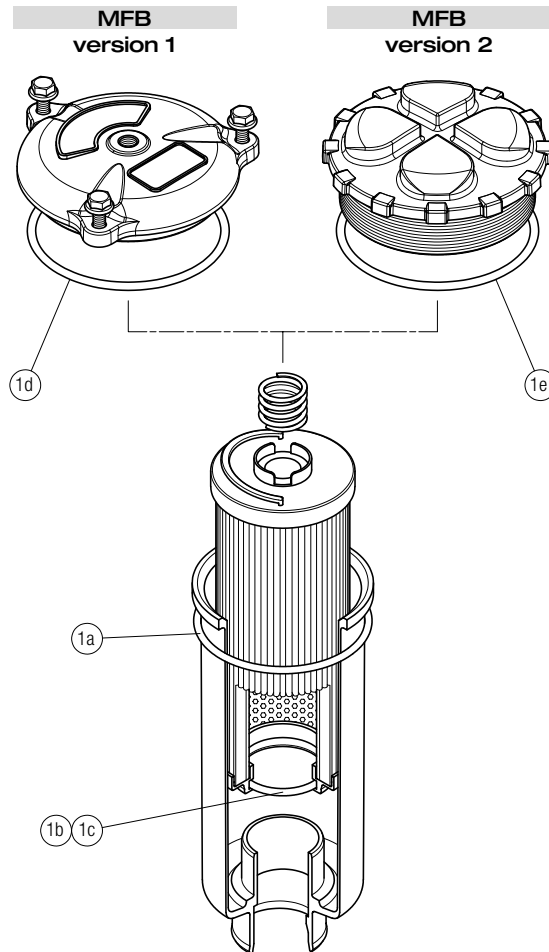

Item:	Q.ty: 1 pc. 1 (1a ÷ 1e)	
Filter series	Seal Kit code number	
	NBR	FPM
<b>MFB 020</b>	02050572	02050573
<b>MFB 030</b>	02050574	02050575
<b>MFB 100</b>	02050555	02050556
<b>MFB 180</b>	02050576	02050577
<b>MFB 190</b>	02050578	02050579





# MPH series & MPI series

Maximum pressure up to 10 bar - Flow rate up to 3000 l/min



## Technical data

**Return filter** Maximum pressure up to 10 bar - Flow rate up to 3000 l/min

### Filter housing materials

- Head:
  - Aluminium: MPH 104-110-114-120-250
  - Anodised Aluminium: MPH 630-850
  - Painted Aluminium: MPH 660
- Cover:
  - Nylon: MPH 104-110-114-120
  - Aluminium: MPH 250
  - Anodised Aluminium: MPH 630
  - Painted Aluminium: MPH 660
  - Steel: MPH 850
- Insert assembly:
  - Nylon (only for: MPH 104-110-114-120)
  - Aluminium (the other insert assemblies)
- Diffuser:
  - Zinc Plated Steel (excluded MPH 850)
  - Tinned Steel: MPH 850
- Valve:
  - Phosphated Steel

### Pressure

Working pressure: 1 MPa (10 bar)

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)
- Opening pressure 250 kPa (2.5 bar) (except for MPH 850)

### $\Delta p$ element type

- Microfibre filter elements - series MR: 10 bar
- Fluid flow through the filter element from IN to OUT.

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C


### Note

MPH filters are provided for vertical mounting

## Weights [kg] and volumes [dm<sup>3</sup>]

	Weights [kg]					Volumes [dm <sup>3</sup> ]						
	Lenght	1	2	3	4	5	Lenght	1	2	3	4	5
<b>MPH 104-110</b>	1.60	1.70	1.80	2.20	2.60	1.60	1.70	1.80	2.20	2.60		
<b>MPH 114-120</b>	1.60	1.70	1.80	2.20	2.60	1.60	1.70	1.80	2.20	2.60		
<b>MPH 250</b>	3.60	3.90	4.20	5.60	-	4.40	4.40	5.40	8.00	-		
<b>MPH 630</b>	6.50	7.00	7.40	8.50	10.50	7.30	9.00	11.00	13.00	19.20		
<b>MPH 660</b>	-	-	-	11.50	14.00	-	-	-	14.60	21.00		
<b>MPH 850</b>	32.00	35.00	38.00	42.00	-	13.00	16.50	21.00	25.00	-		

## Hydraulic symbols







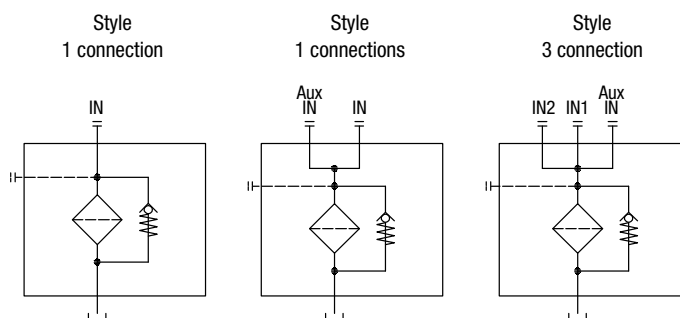


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.



$\Delta p$  varies proportionally with density.

Pressure drop


Filter housings  $\Delta p$  pressure drop

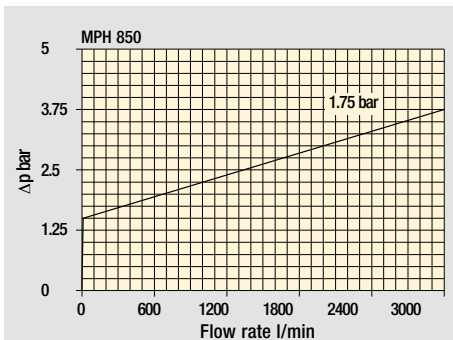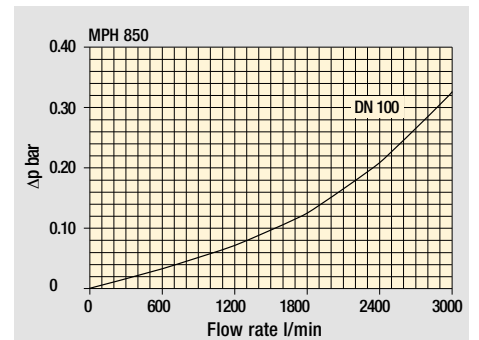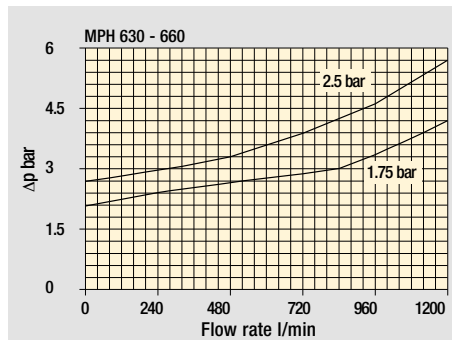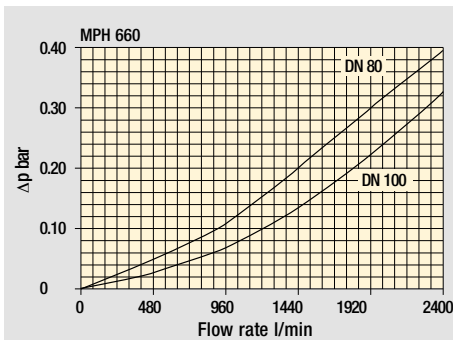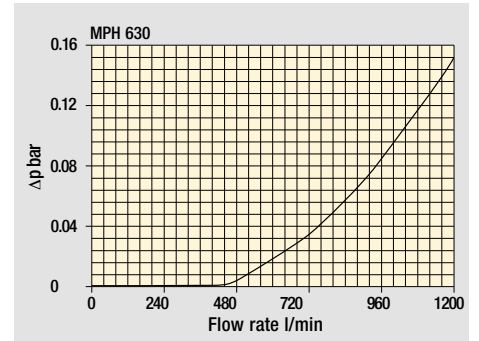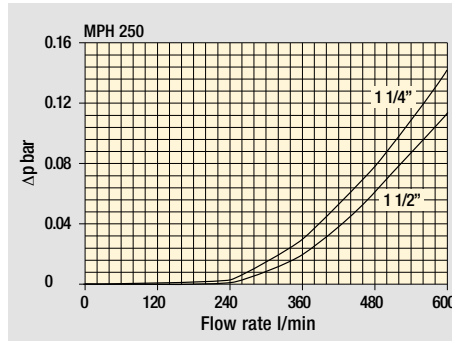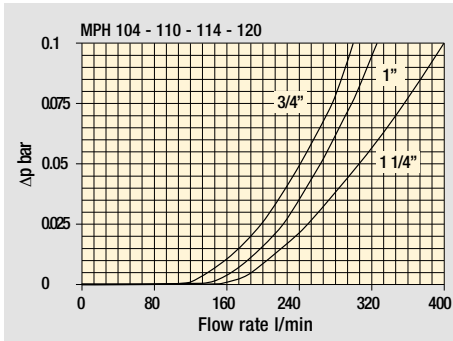

Bypass valve pressure drop

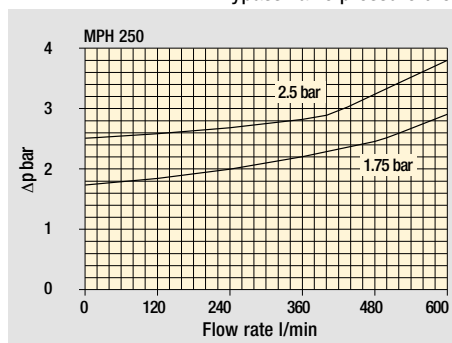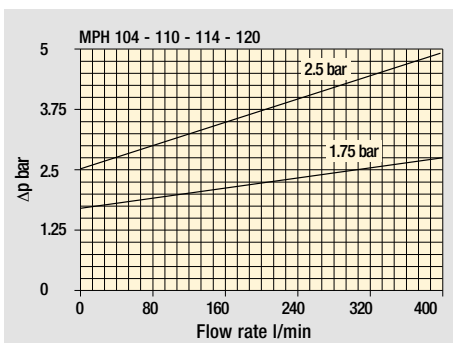



Air breather pressure drop

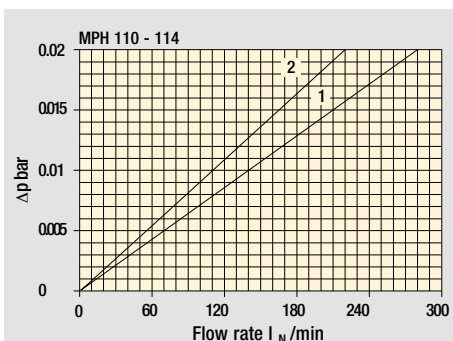

- 1  C With air breather 10  $\mu$ m
- 2  D With anti-splash and SAP50 10  $\mu$ m







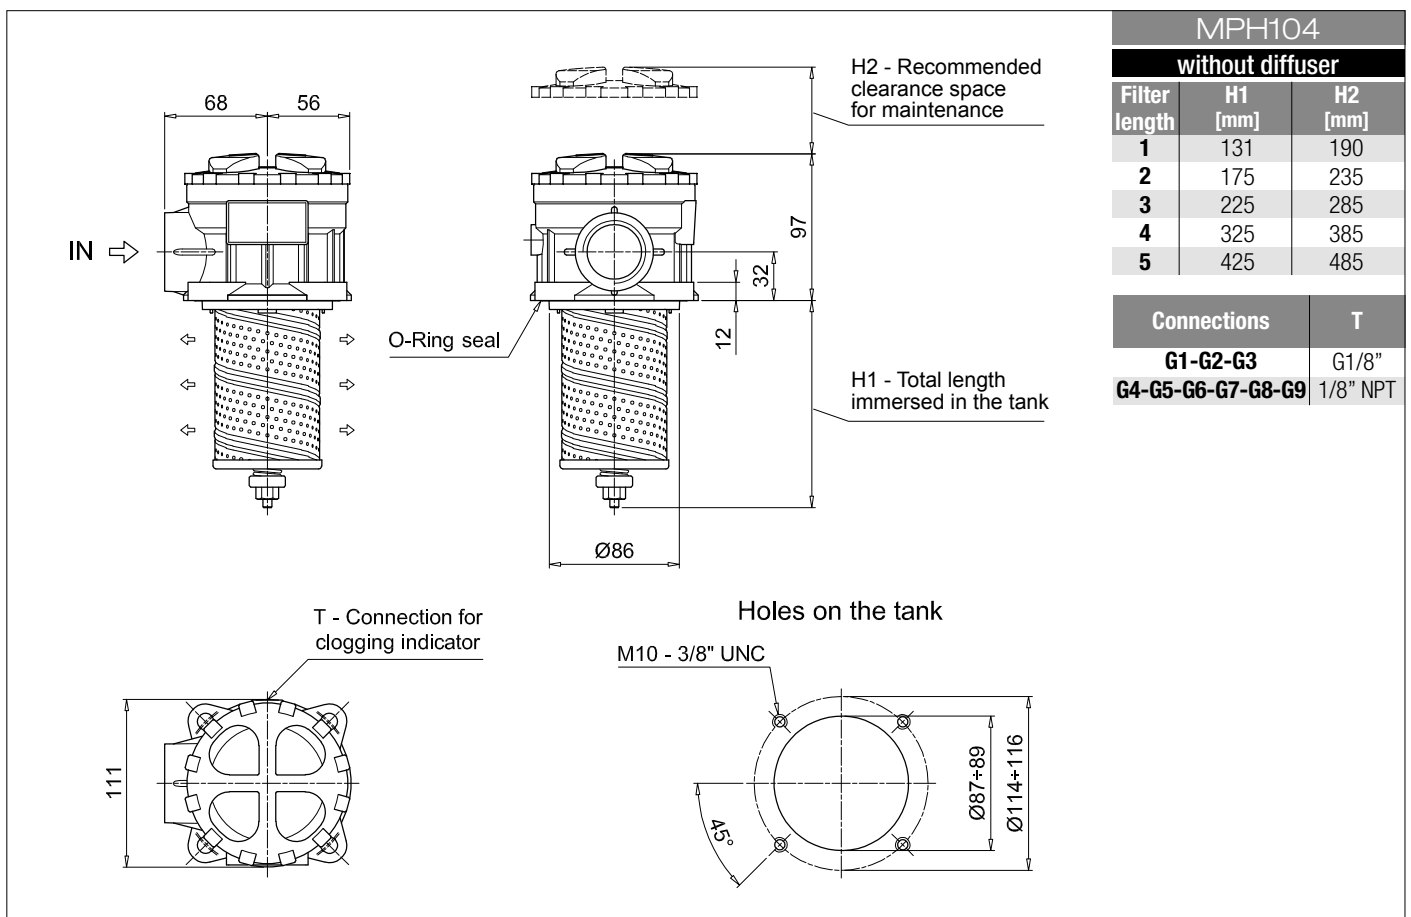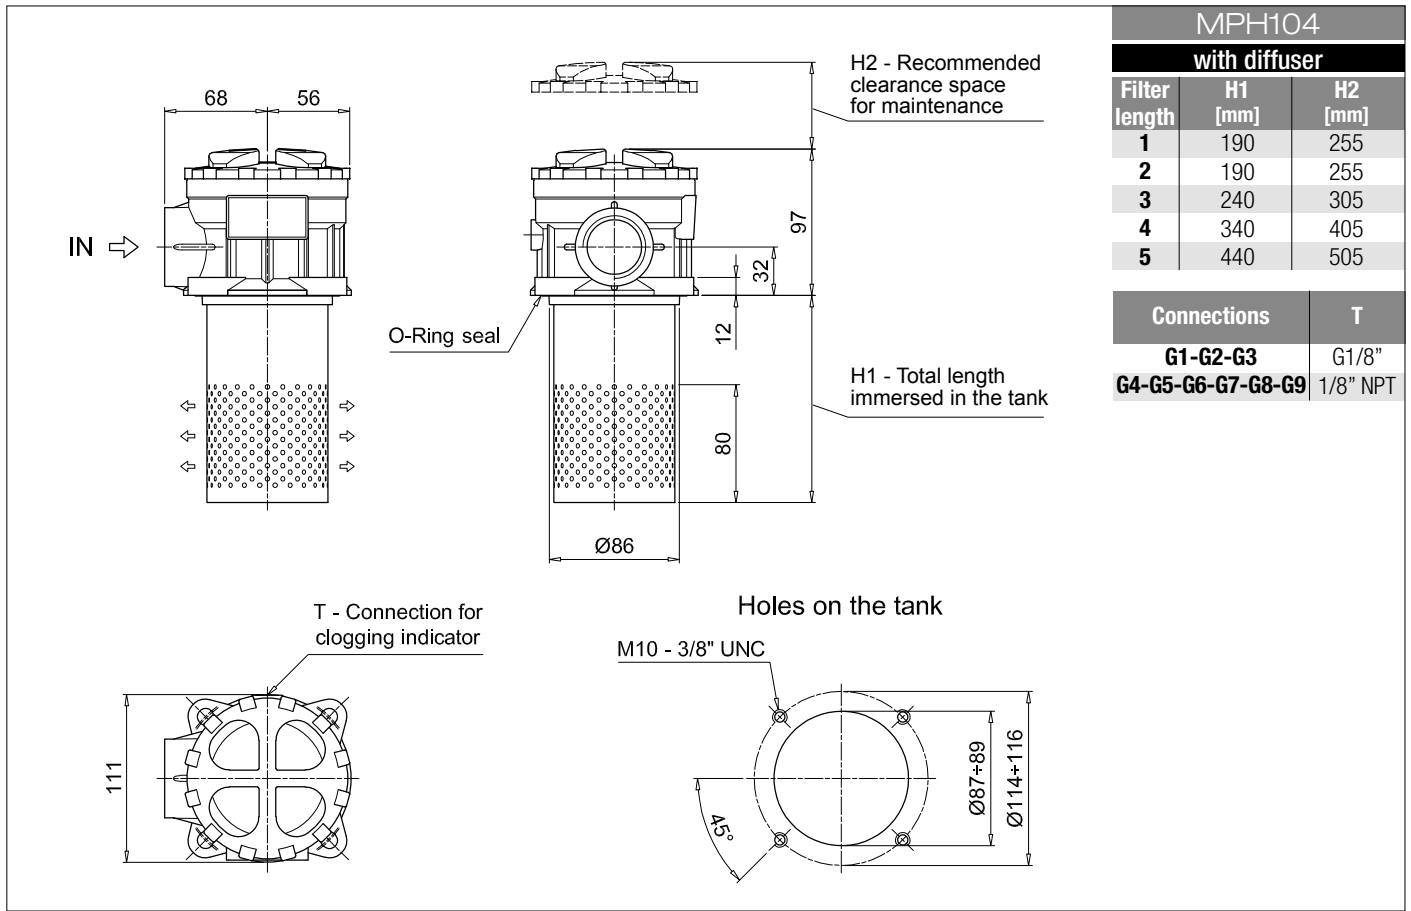

# MPH MPH104 - MPH114

## Dimensions

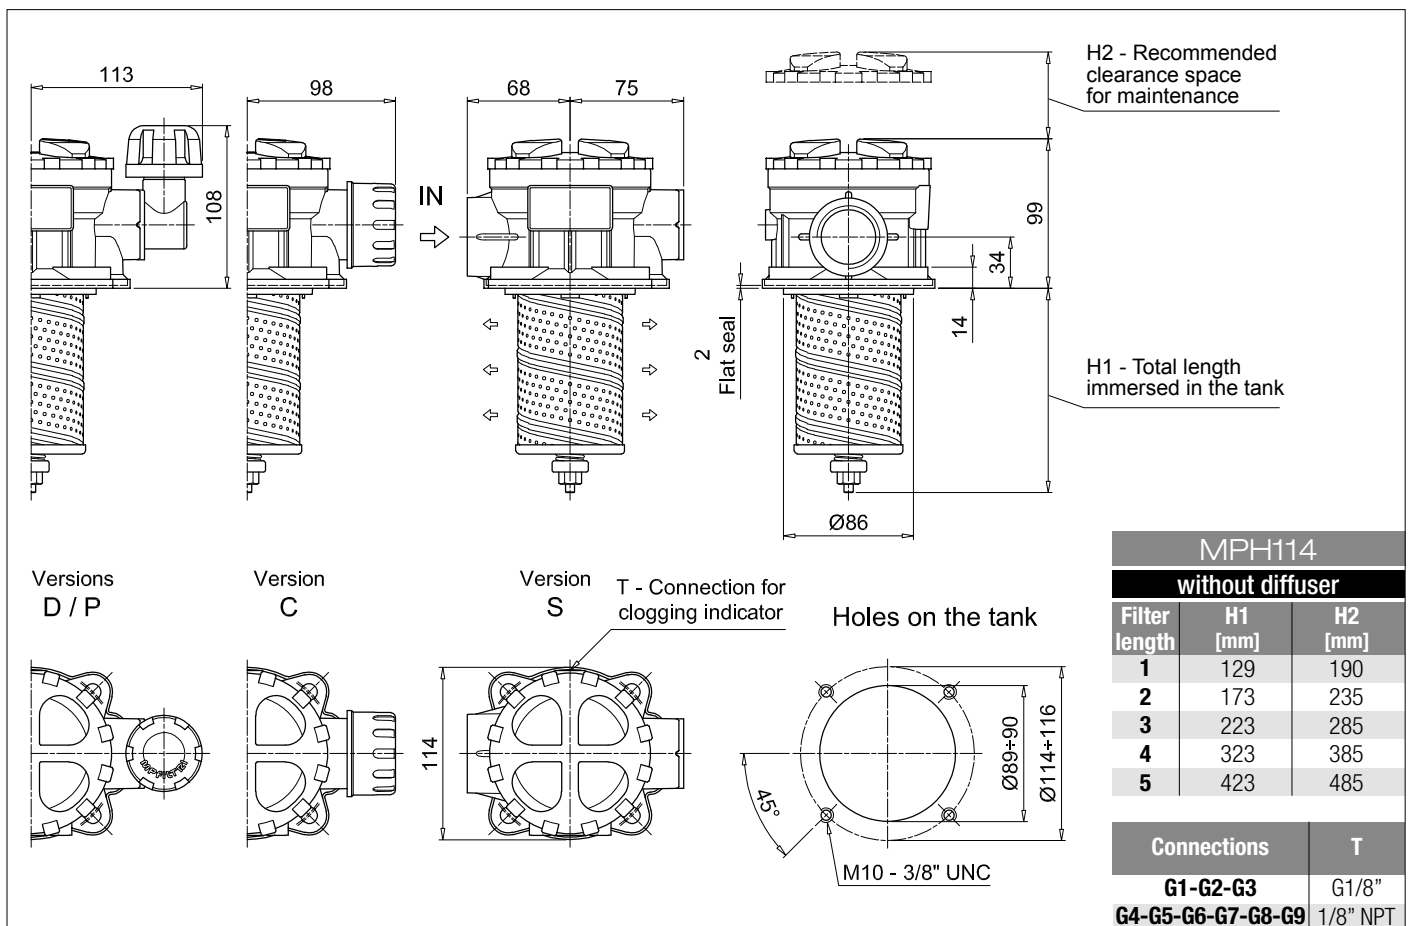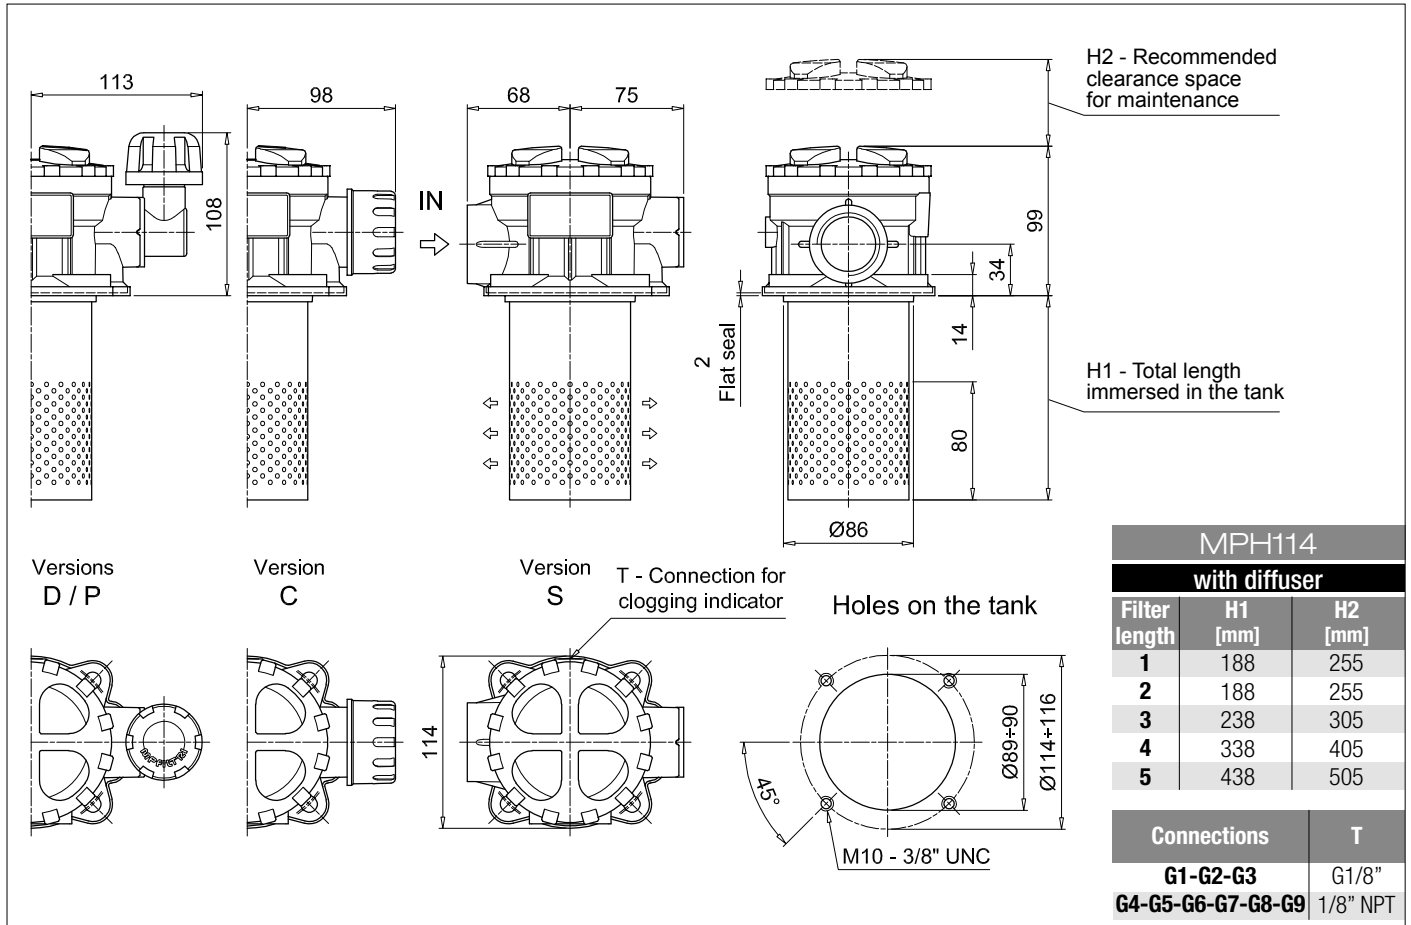



## Designation & Ordering code

### COMPLETE FILTER

Series and size **MPH110** Configuration example: **MPH110** | **1** | **S** | **D** | **S** | **A** | **G1** | **1** | **A10** | **P01**

**Length**  
1 | 2 | 3 | 4 | 5 |

**Bypass valve**  
**S** Without bypass | **C** 1.75 bar | **E** 2.5 bar

**Diffuser and magnetic column**  
**D** With diffuser, with magnetic column  
**F** With diffuser, without magnetic column  
**O** Without diffuser, with magnetic column  
**E** Without diffuser, without magnetic column

**Air breather**  
**S** Without air breather  
**C** With air breather 10 µm  
**D** With anti-splash and air breather SAP050 10 µm  
**P** With anti-splash and air breather SAP050 10 µm pressurization 0.5 bar

Seals and treatments	Filtration rating		
	Axx	Mxx	Pxx
<b>A</b> NBR	•	•	•
<b>V</b> FPM	•	•	•
<b>W</b> NBR head anodized	•	•	
<b>Z</b> FPM head anodized	•	•	

Main Connections	Aux size 1	Aux size 2	Main Connections	Aux size 1	Aux size 2
<b>G1</b> G3/4"	G3/8"	G1/2"	<b>G7</b> SAE 12 - 1 1/16" - 12 UN	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF
<b>G2</b> G1"			<b>G8</b> SAE 16 - 1 5/16" - 12 UN		
<b>G3</b> G1 1/4"			<b>G9</b> SAE 20 - 1 5/8" - 12 UN		
<b>G4</b> 3/4" NPT	3/8" NPT	1/2" NPT			
<b>G5</b> 1" NPT					
<b>G6</b> 1 1/4" NPT					

**Aux connection** - see previous table  
**0** Not machined | **1** Aux size 1 | **2** Aux size 2

Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### FILTER ELEMENT

Element series and size **MR100** Configuration example: **MR100** | **1** | **A10** | **A** | **P01**

**Element length**  
1 | 2 | 3 | 4 | 5 |



Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

**Seals**  
**A** NBR  
**V** FPM

**Execution**  
**P01** MP Filtri standard  
**Pxx** Customized

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		
<b>DPT</b> Dipstick	225		

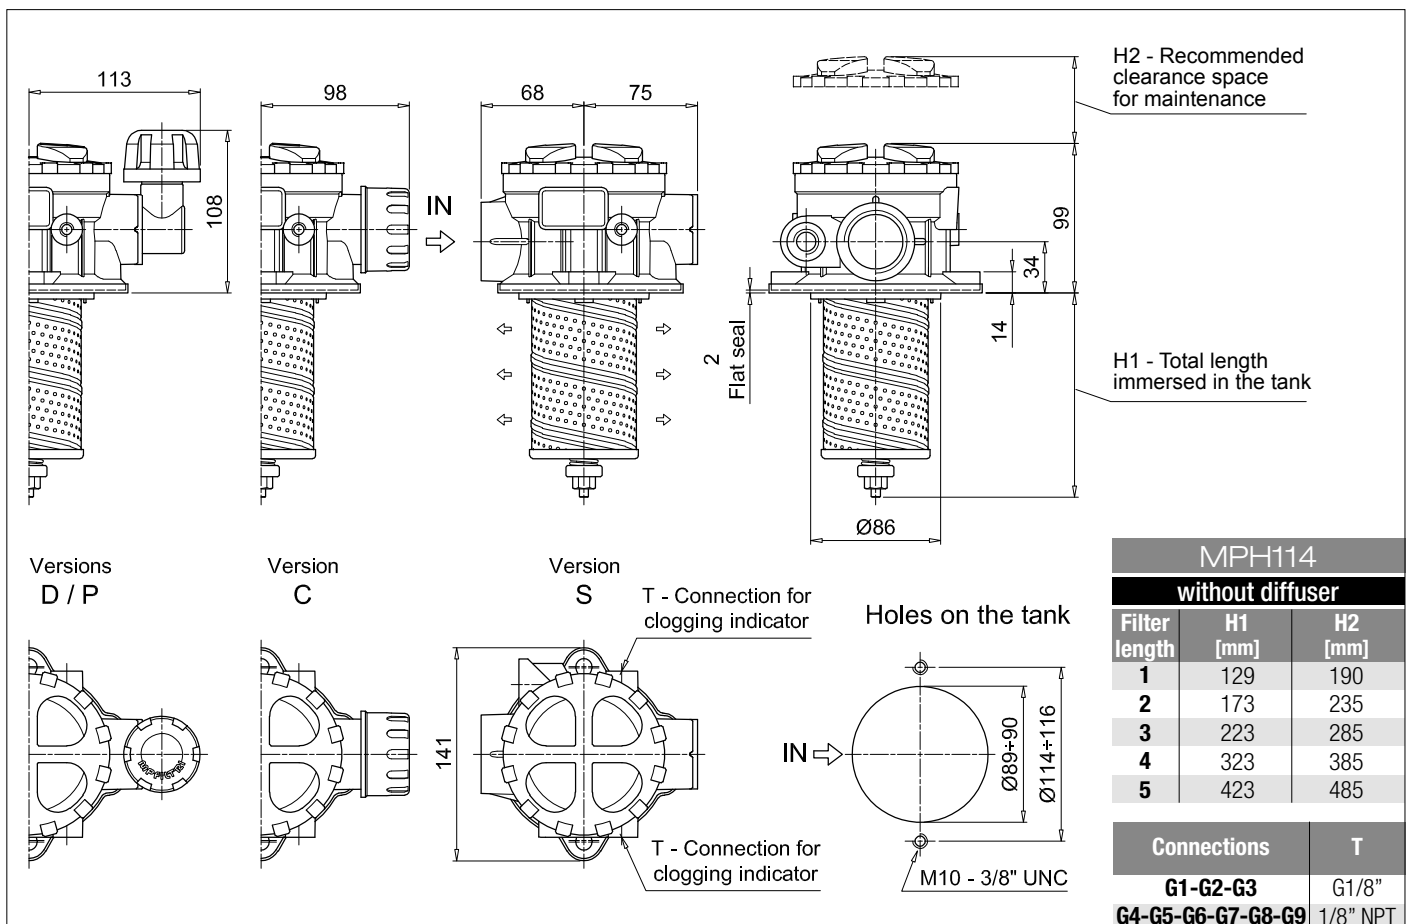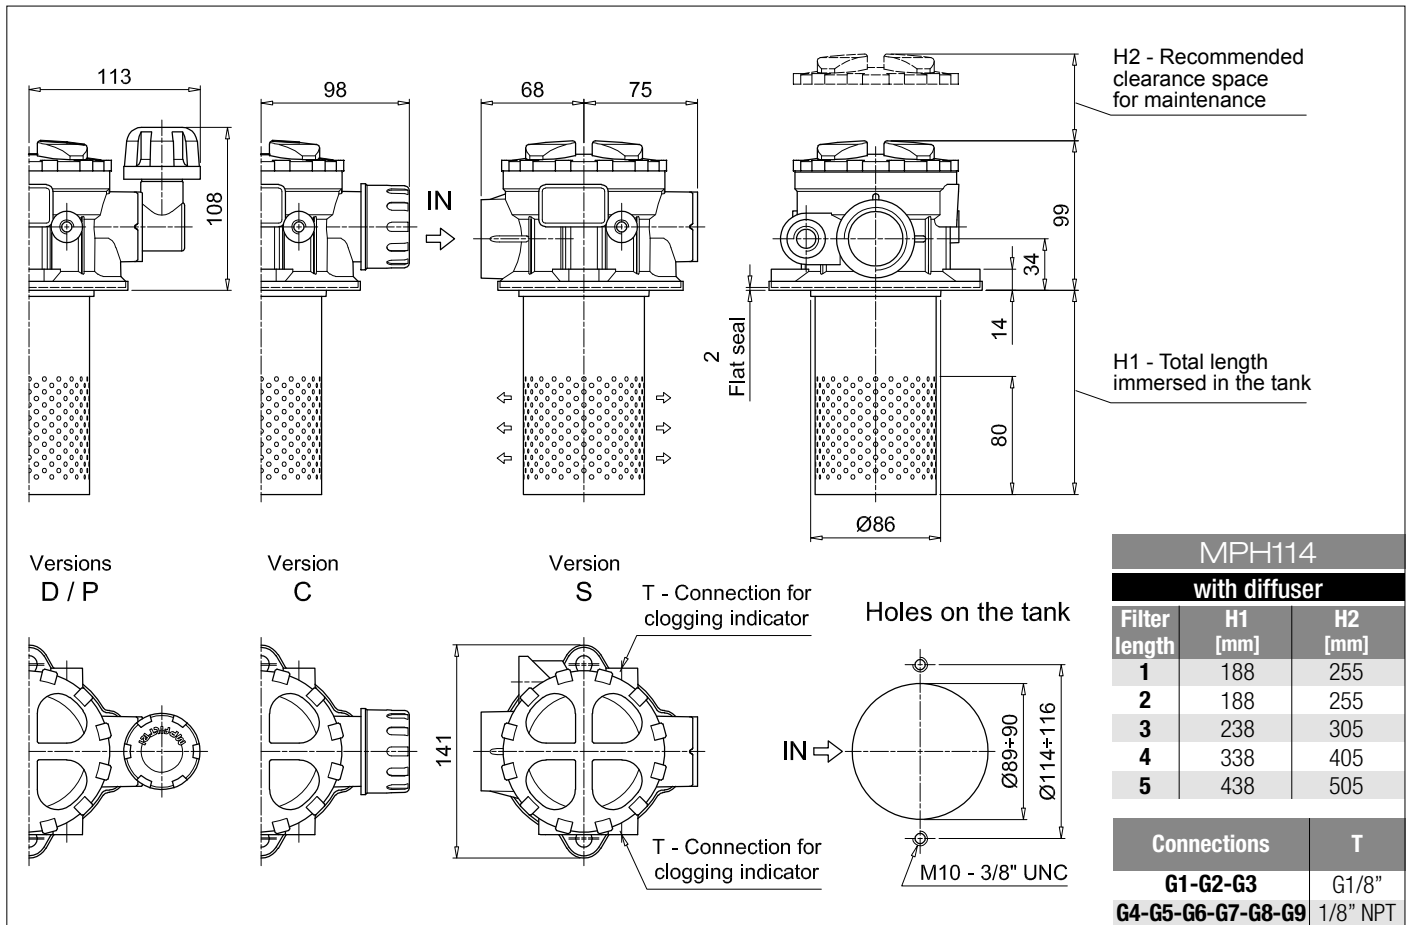

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **MPH120** | **1** | **S** | **D** | **A** | **G1** | **1** | **A10** | **P01**

**Series and size**  
**MPH120**

**Length**  
**1** | **2** | **3** | **4** | **5** |

**Bypass valve**  
**S** Without bypass | **C** 1.75 bar | **E** 2.5 bar

**Diffuser and magnetic column**  
**D** With diffuser, with magnetic column  
**F** With diffuser, without magnetic column  
**O** Without diffuser, with magnetic column  
**E** Without diffuser, without magnetic column

Seals and treatments	Filtration rating		
	Axx	Mxx	Pxx
<b>A</b> NBR	•	•	•
<b>V</b> FPM	•	•	•
<b>W</b> NBR head anodized	•	•	
<b>Z</b> FPM head anodized	•	•	

Main Connections	Rear connections	Aux size 1	Aux size 2
<b>G1</b> G3/4"	G3/4"	G3/8"	G1/2"
<b>G2</b> G1"	G1"		
<b>G3</b> G1 1/4"	G3/4"		
<b>G4</b> 3/4" NPT	3/4" NPT	3/8" NPT	1/2" NPT
<b>G5</b> 1" NPT	1" NPT		
<b>G6</b> 1 1/4" NPT	3/4" NPT		
<b>G7</b> SAE 12 - 1 1/16" - 12 UN	SAE 12 - 1 1/16" - 12 UN	SAE 6 - 9/16" - 18 UNF	SAE 8 - 3/4" - 16 UNF
<b>G8</b> SAE 16 - 1 5/16" - 12 UN	SAE 16 - 1 5/16" - 12 UN		
<b>G9</b> SAE 20 - 1 5/8" - 12 UN	SAE 12 - 1 1/16" - 12 UN		

**Aux connection** - see previous table  
**0** Not machined | **1** Aux size 1 | **2** Aux size 2

Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Execution	
<b>P01</b> MP Filtri standard	
<b>Pxx</b> Customized	

### FILTER ELEMENT

Configuration example: **MR100** | **1** | **A10** | **A** | **P01**

**Element series and size**  
**MR100**

**Element length**  
**1** | **2** | **3** | **4** | **5** |



Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Seals	
<b>A</b> NBR	
<b>V</b> FPM	

Execution	
<b>P01</b> MP Filtri standard	
<b>Pxx</b> Customized	

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		
Additional features	page		
<b>DPT</b> Dipstick	225		

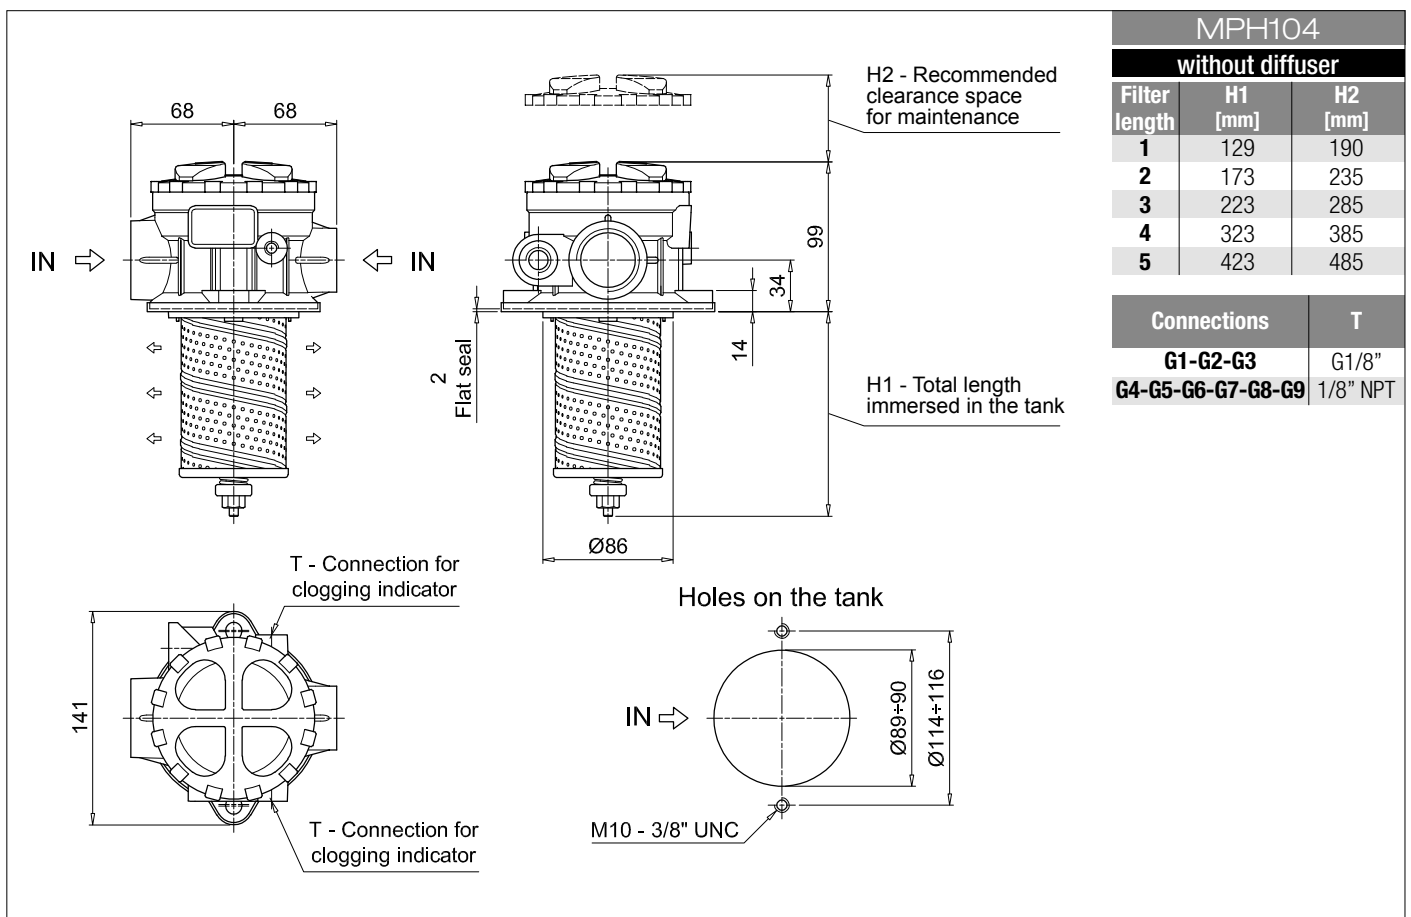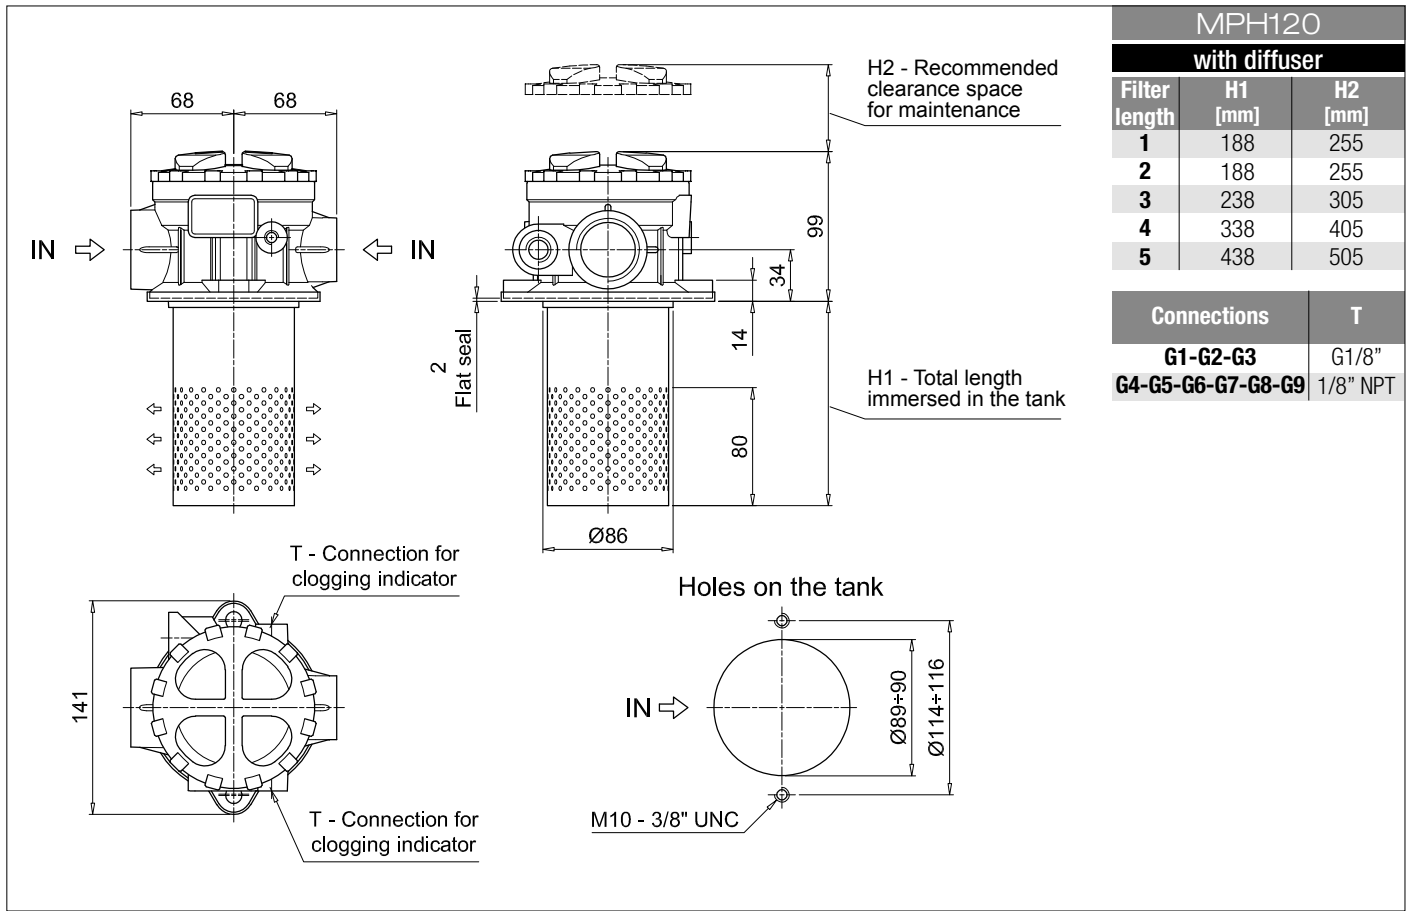

## Designation & Ordering code

### COMPLETE FILTER

Series and size **MPH250** Configuration example: **MPH250** **1** **C** **D** **S** **A** **G1** **A10** **P01**

Length **1** | **2** | **3** | **4** |

By-pass valve **S** Without bypass **C** 1.75 bar **E** 2.5 bar

Diffuser and magnetic column  
**D** With diffuser, with magnetic column  
**F** With diffuser, without magnetic column  
**O** Without diffuser, with magnetic column  
**E** Without diffuser, without magnetic column

Air breather **S** Without air breather

Seals and treatments	Filtration rating		
	Axx	Mxx	Pxx
<b>A</b> NBR	•	•	•
<b>V</b> FPM	•	•	•
<b>W</b> NBR head anodized filter element compatible with fluids HFA-HFB-HFC	•	•	
<b>Z</b> FPM head anodized	•	•	

Main Connections	Rear connections
<b>G1</b> G1 1/2"	-
<b>G2</b> G1 1/2"	G1 1/4"
<b>G4</b> 1 1/2" NPT	-
<b>G5</b> 1 1/2" NPT	1 1/4" NPT
<b>G7</b> SAE 24 - 1 7/8" - 12 UN	-
<b>G8</b> SAE 24 - 1 7/8" - 12 UN	SAE 20 - 1 5/8" - 12 UN
<b>F1</b> 1 1/2" SAE 3000 psi/M	-
<b>F2</b> 1 1/2" SAE 3000 psi/M	1 1/4" SAE 3000 psi/M
<b>F3</b> 1 1/2" SAE 3000 psi/UNC	-
<b>F4</b> 1 1/2" SAE 3000 psi/UNC	1 1/4" SAE 3000 psi/UNC

Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Execution	
<b>P01</b>	MP Filtri standard
<b>Pxx</b>	Customized

### FILTER ELEMENT

Element series and size **MR250** Configuration example: **MR250** **1** **A10** **A** **P01**

Element length **1** | **2** | **3** | **4** |



Filtration rating (filter media)	
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm

Seals	Execution
<b>A</b> NBR	<b>P01</b> MP Filtri standard
<b>V</b> FPM	<b>Pxx</b> Customized

### ACCESSORIES

Indicators	page		page
<b>BVA</b> Axial pressure gauge	216	<b>BEA</b> Electrical pressure indicator	215
<b>BVR</b> Radial pressure gauge	216	<b>BEM</b> Electrical pressure indicator	215
<b>BVP</b> Visual pressure indicator with automatic reset	217	<b>BLA</b> Electrical / visual pressure indicator	215-216
<b>BVQ</b> Visual pressure indicator with manual reset	217		



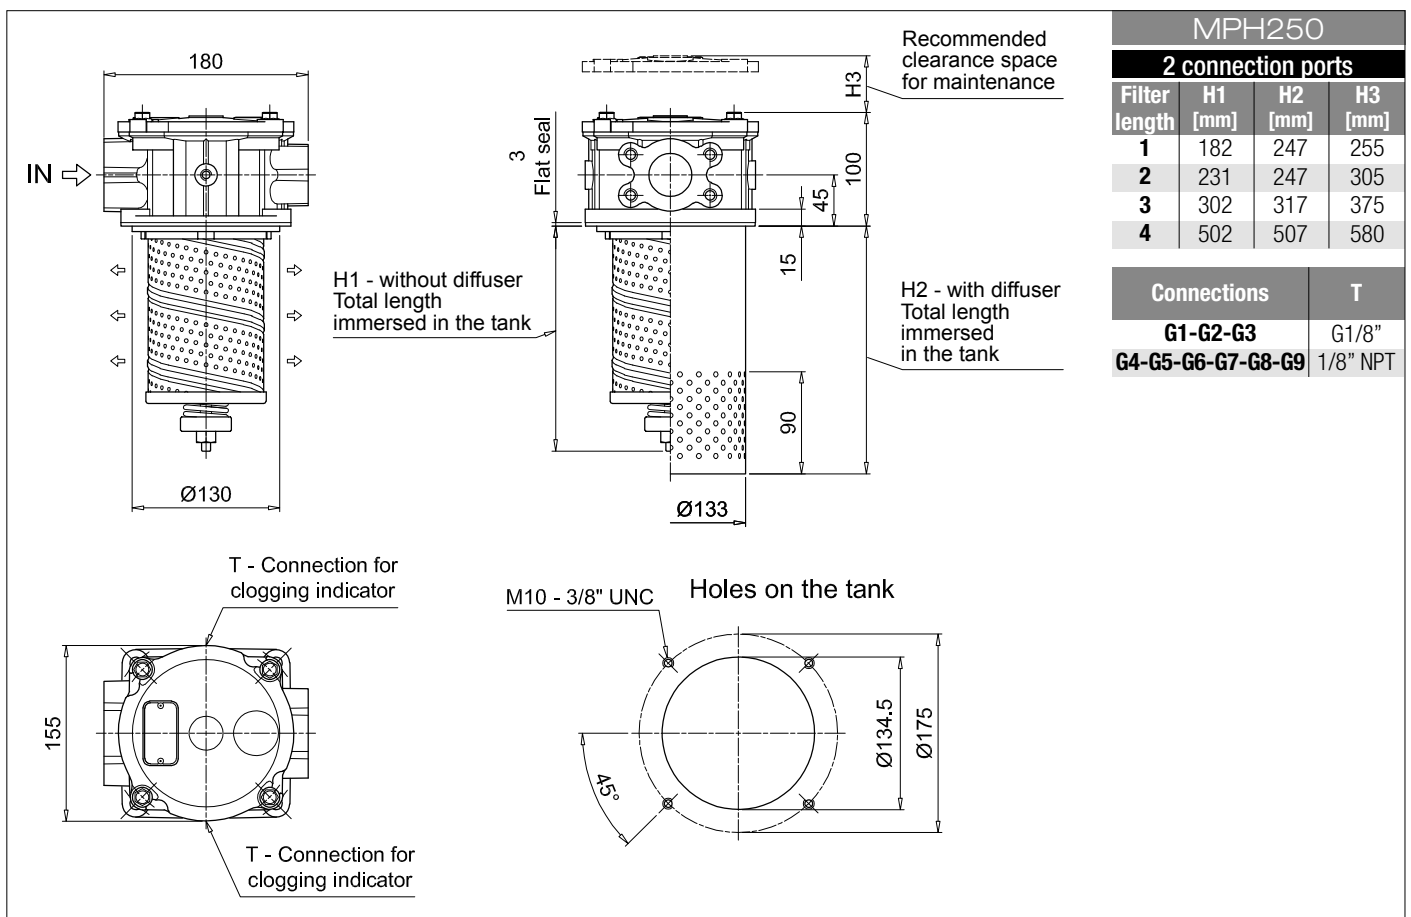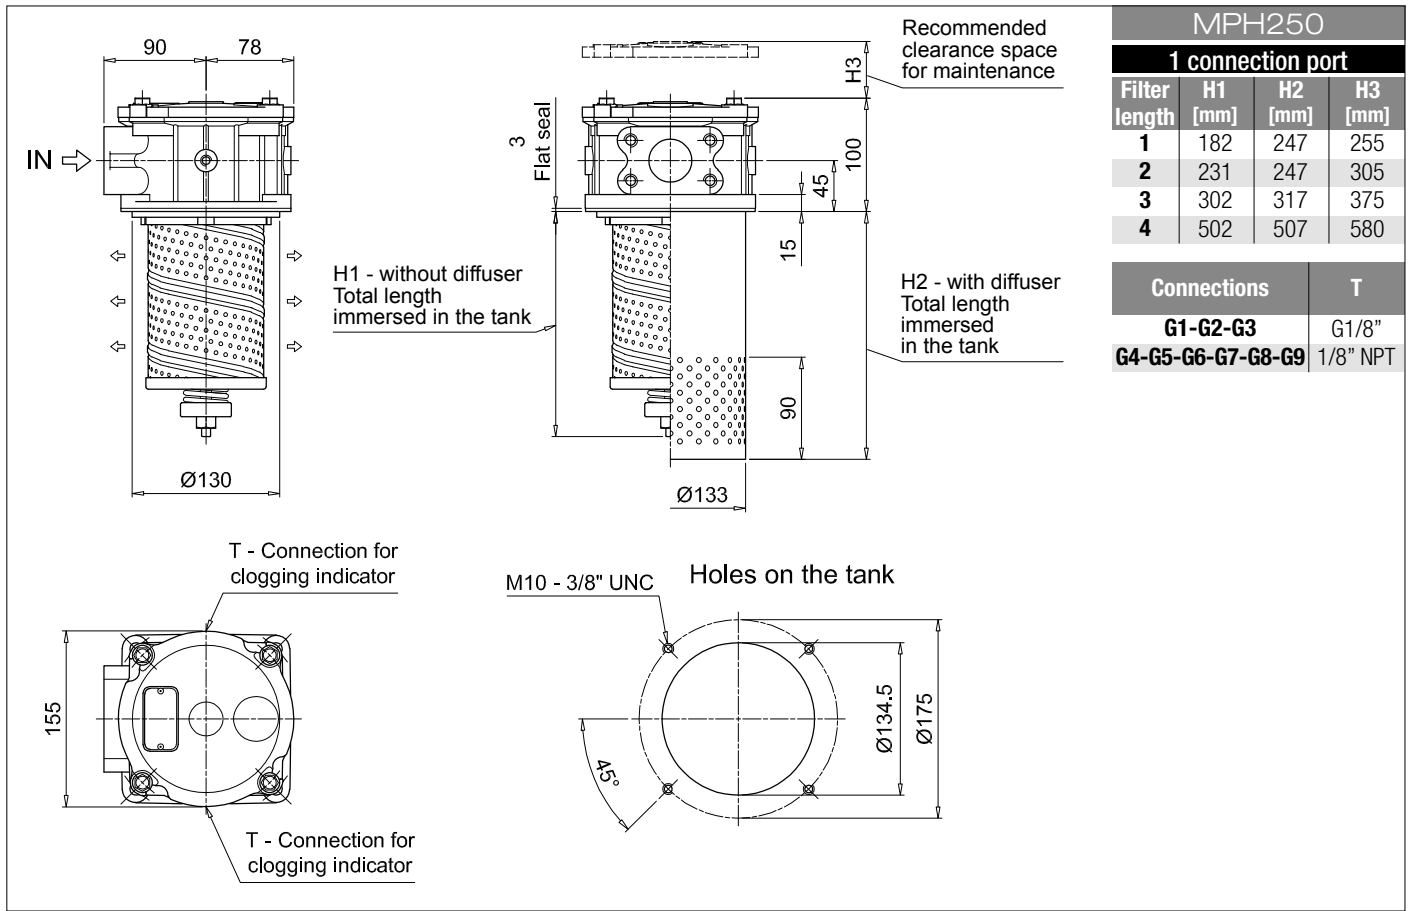

# MPH MPH630 - MPH660

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>		Configuration example 1: MPH630 1 S E S W F1 M25 P01									
<b>MPH630</b>		Configuration example 2: MPH660 1 C D S A F4 A10 P01									
<b>MPH660</b>											
<b>Length</b>	MPH630	MPH660									
1	•										
2	•										
3	•										
4	•	•									
5	•	•									
<b>Bypass valve</b>		S Without bypass		C 1.75 bar	E 2.5 bar						
<b>Diffuser and magnetic column</b>											
D With diffuser, with magnetic column											
F With diffuser, without magnetic column											
O Without diffuser, with magnetic column											
E Without diffuser, without magnetic column											
<b>Air breather</b>											
S Without air breather											
<b>Seals and treatments</b>		Filtration rating									
		Axx	Mxx	Pxx							
A	NBR	•	•	•							
V	FPM	•	•	•							
W	NBR head anodized	•	•		filter element compatible with fluids HFA-HFB-HFC						
Z	FPM head anodized	•	•								
<b>Main Connections MPH630</b>		<b>Rear connections</b>		<b>Connections MPH660</b>							
F1	2 1/2" SAE 3000 psi/M	-		F1	3" SAE 3000 psi/M						
F2	2 1/2" SAE 3000 psi/M	2" SAE 3000 psi/M		F2	4" SAE 3000 psi/M						
F3	2 1/2" SAE 3000 psi/UNC	-									
F4	2 1/2" SAE 3000 psi/UNC	2" SAE 3000 psi/UNC									
<b>Filtration rating (filter media)</b>											
A03	Inorganic microfiber 3 µm	M25	Wire mesh 25 µm								
A06	Inorganic microfiber 6 µm	M60	Wire mesh 60 µm								
A10	Inorganic microfiber 10 µm	M90	Wire mesh 90 µm								
A16	Inorganic microfiber 16 µm	P10	Resin impregnated paper 10 µm								
A25	Inorganic microfiber 25 µm	P25	Resin impregnated paper 25 µm								
		<b>Execution</b>									
		P01 MP Filtri standard									
		Pxx Customized									

### FILTER ELEMENT

<b>Element series and size</b>		Configuration example 1: MR630 1 M25 A P01				
<b>MR630</b>		Configuration example 2: MR630 1 A10 A P01				
<b>Element length</b>		1   2   3   4   5				
<b>Filtration rating (filter media)</b>						
A03	Inorganic microfiber 3 µm	M25	Wire mesh 25 µm			
A06	Inorganic microfiber 6 µm	M60	Wire mesh 60 µm			
A10	Inorganic microfiber 10 µm	M90	Wire mesh 90 µm			
A16	Inorganic microfiber 16 µm	P10	Resin impregnated paper 10 µm			
A25	Inorganic microfiber 25 µm	P25	Resin impregnated paper 25 µm			
		<b>Seals</b>		<b>Execution</b>		
		A NBR		P01 MP Filtri standard		
		V FPM		Pxx Customized		

### ACCESSORIES

Indicators	page		page
BVA Axial pressure gauge	216	BEA Electrical pressure indicator	215
BVR Radial pressure gauge	216	BEM Electrical pressure indicator	215
BVP Visual pressure indicator with automatic reset	217	BLA Electrical / visual pressure indicator	215-216
BVQ Visual pressure indicator with manual reset	217		

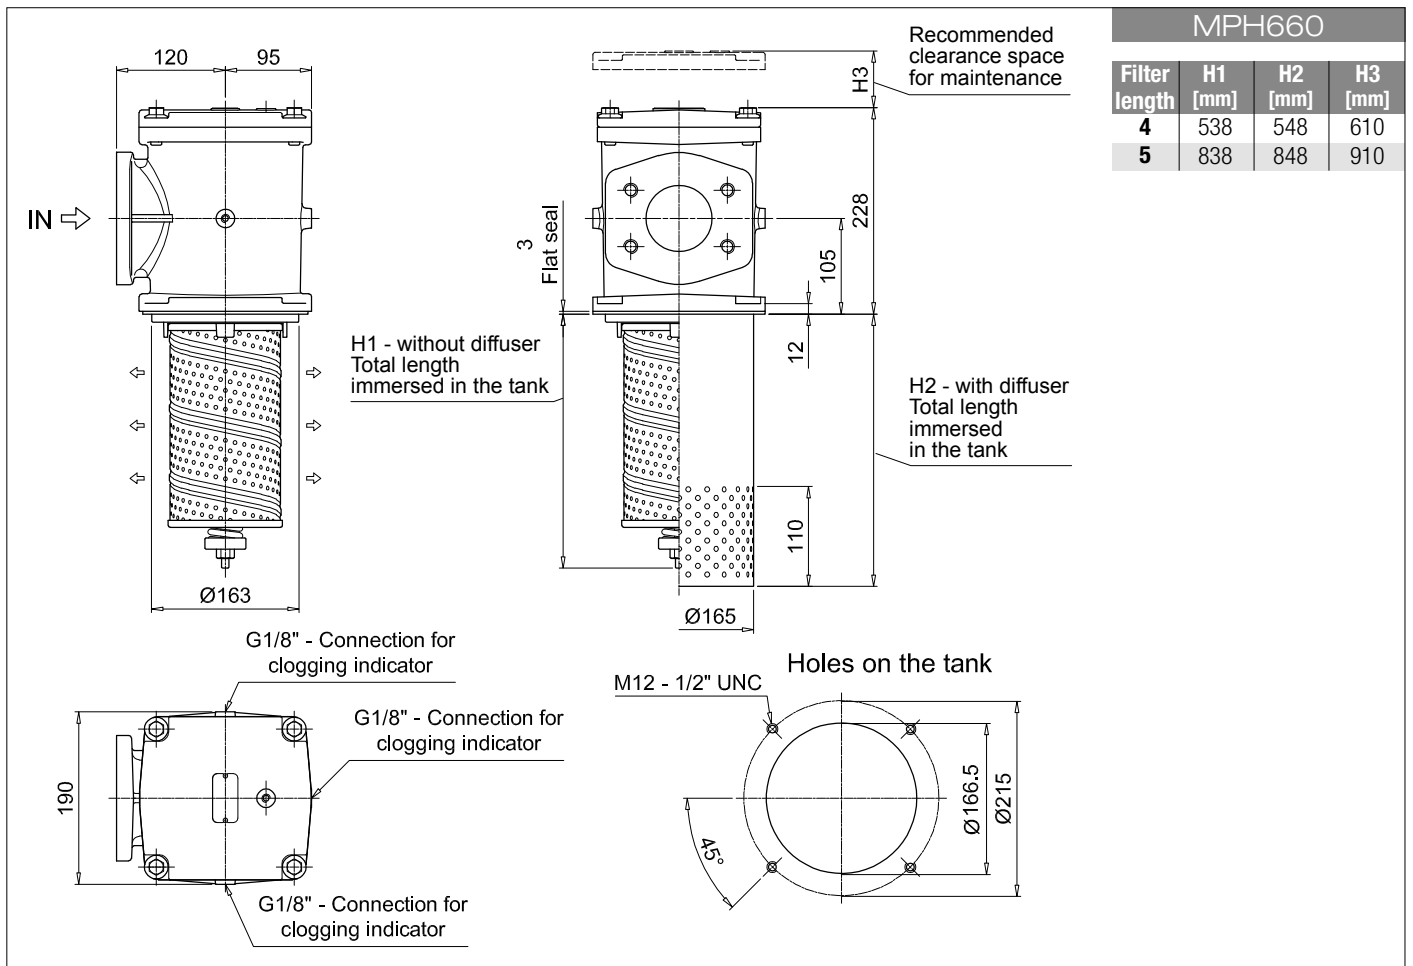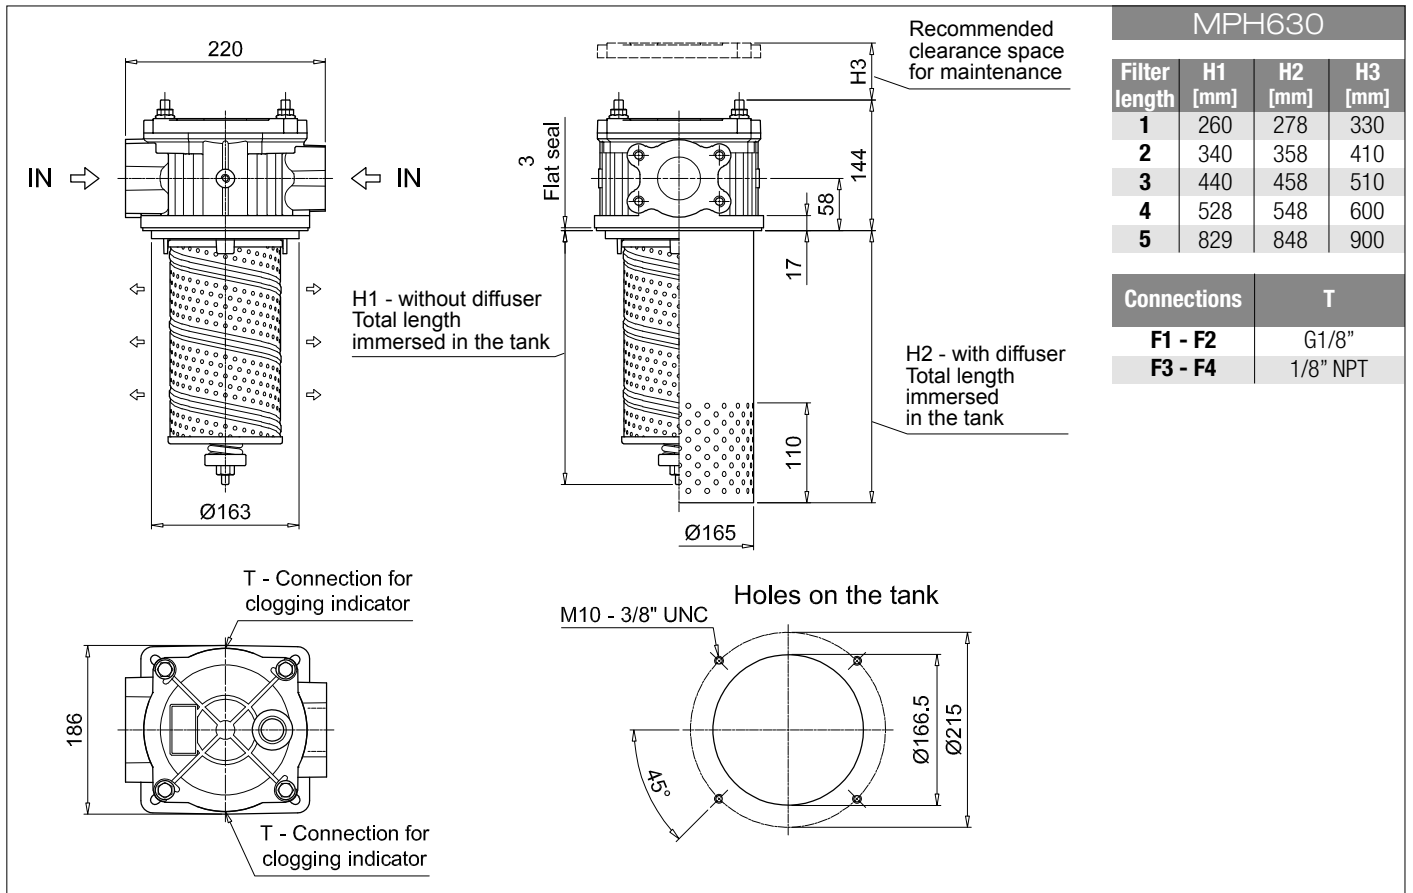

## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b> <b>MPH850</b>	Configuration example: MPH850   1   C   D   S   A   F1   A10   P01									
<b>Length</b> 1   2   3   4										
<b>Bypass valve</b> S Without bypass   C 1.75 bar										
<b>Diffuser and magnetic column</b> D With diffuser, with magnetic column F With diffuser, without magnetic column O Without diffuser, with magnetic column E Without diffuser, without magnetic column										
<b>Air breather</b> S Without air breather										
<b>Seals and treatments</b>	Filtration rating									
A NBR	Axx	Mxx	Pxx							
V FPM										
W NBR head anodized				filter element compatible with fluids HFA-HFB-HFC						
Z FPM head anodized										
<b>Main Connections</b>	<b>Rear connections</b>									
F1 UNI 2223 DN 100 PN 10/16	3" SAE 3000 psi/M									
F2 UNI 2223 DN 100 PN 10/16	3" SAE 3000 psi/UNC									
F5 Not machined	3" SAE 3000 psi/M									
F6 Not machined	3" SAE 3000 psi/UNC									
F7 4" SAE 3000 psi/M	3" SAE 3000 psi/M									
F8 4" SAE 3000 psi/UNC	3" SAE 3000 psi/UNC									
<b>Filtration rating (filter media)</b>										
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm									
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm									
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm									
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm									
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm									
	<b>Execution</b>									
	P01 MP Filtri standard									
	Pxx Customized									

### FILTER ELEMENT

<b>Element series and size</b> <b>MR850</b>	Configuration example: MR850   1   A10   A   P01			
<b>Element length</b> 1   2   3   4				
<b>Filtration rating (filter media)</b>				
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm			
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm			
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm			
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm			
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm			
	<b>Seals</b>		<b>Execution</b>	
	A NBR		P01 MP Filtri standard	
	V FPM		Pxx Customized	

### ACCESSORIES


Indicators	page		page
BVA Axial pressure gauge	216	BEA Electrical pressure indicator	215
BVR Radial pressure gauge	216	BEM Electrical pressure indicator	215
BVP Visual pressure indicator with automatic reset	217	BLA Electrical / visual pressure indicator	215-216
BVQ Visual pressure indicator with manual reset	217		

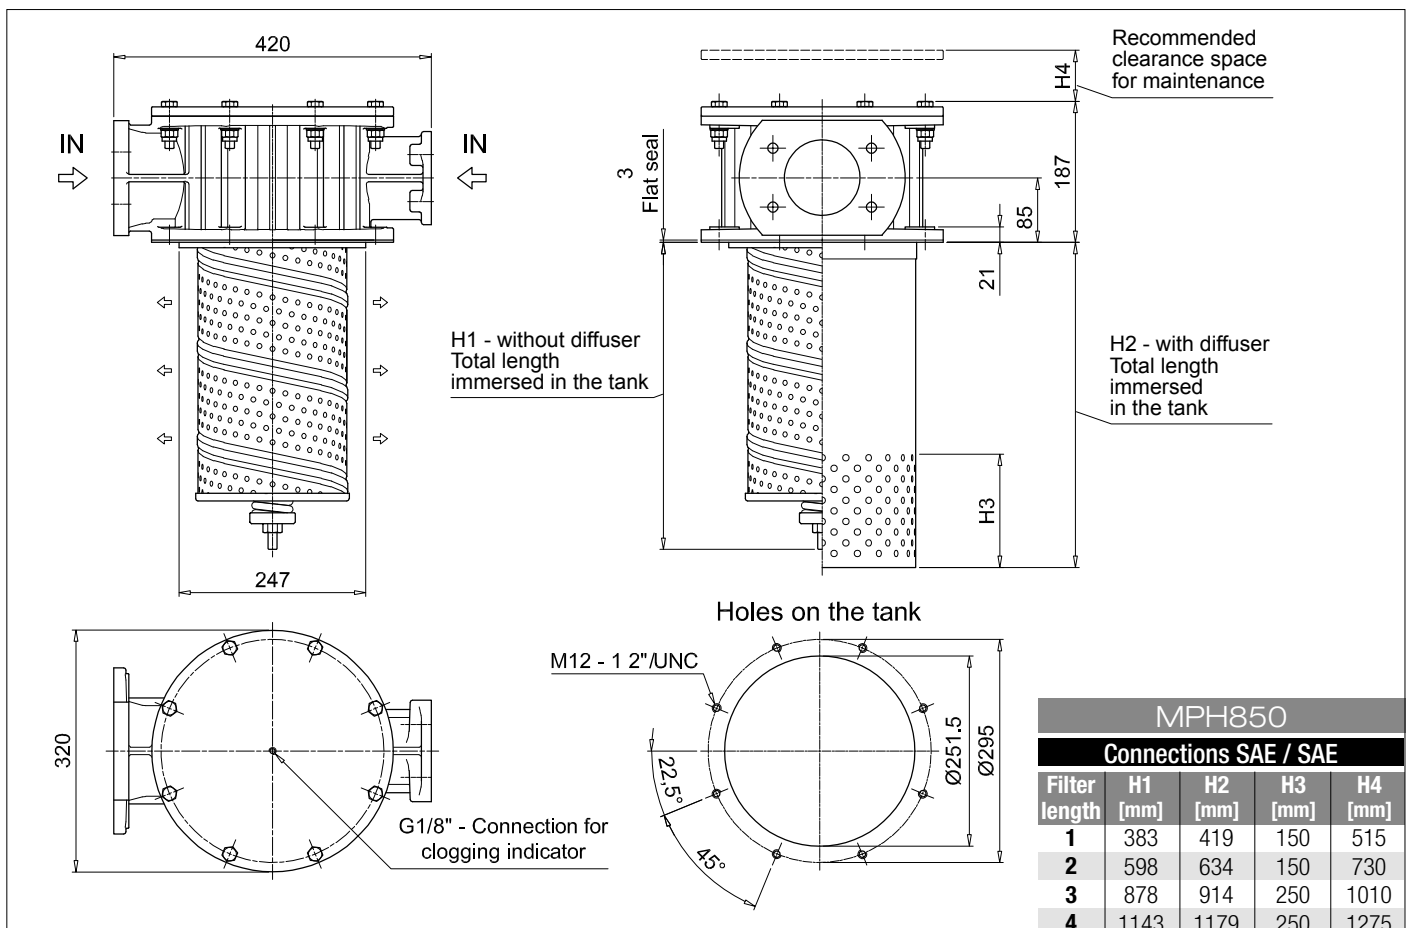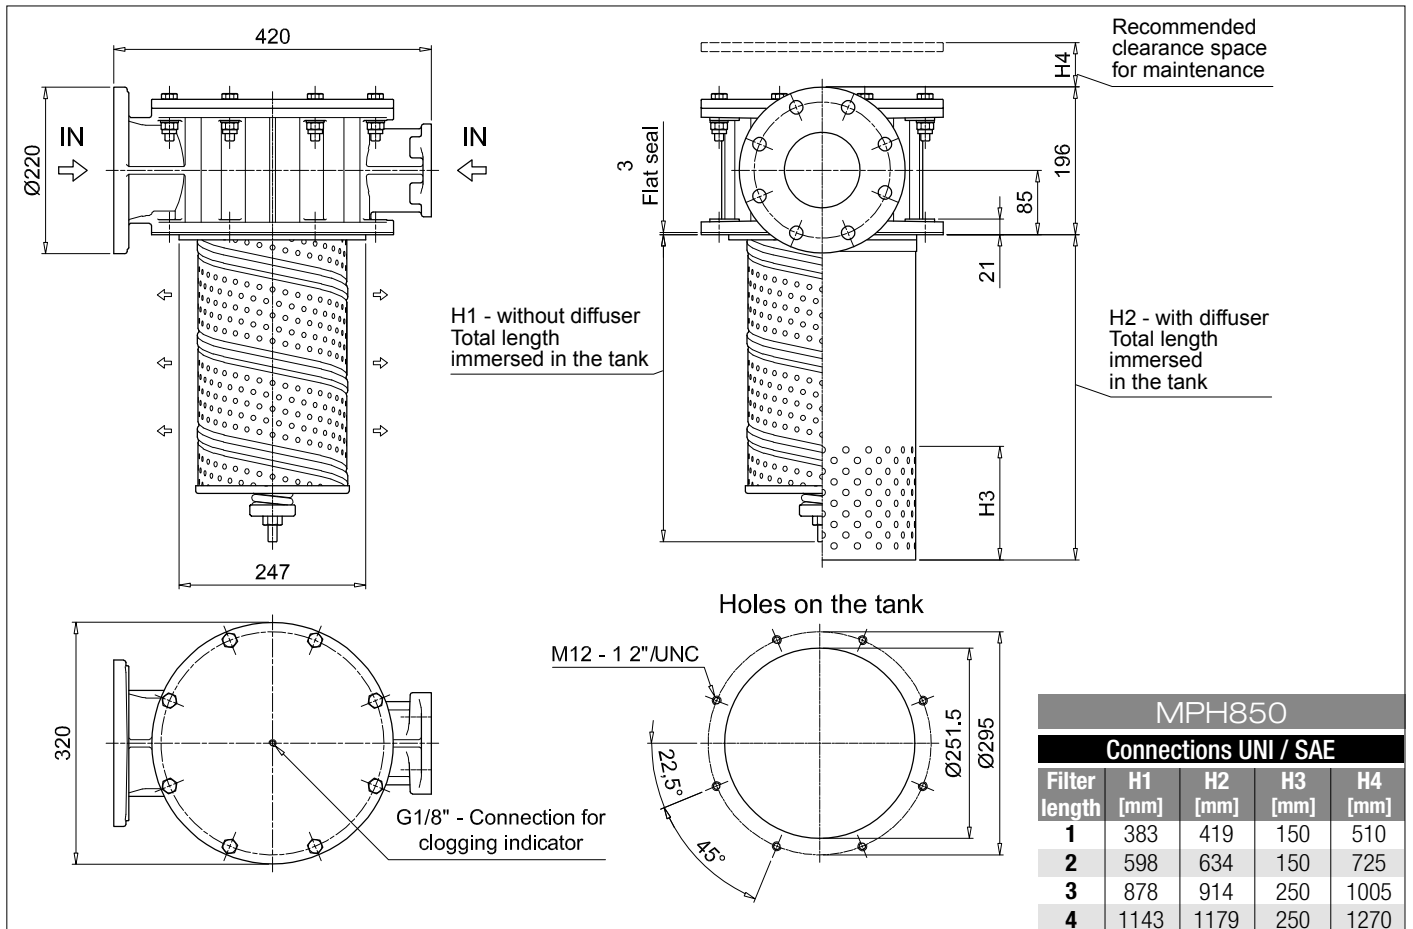

# MPH SPARE PARTS

Order number for spare parts

## MPH 104

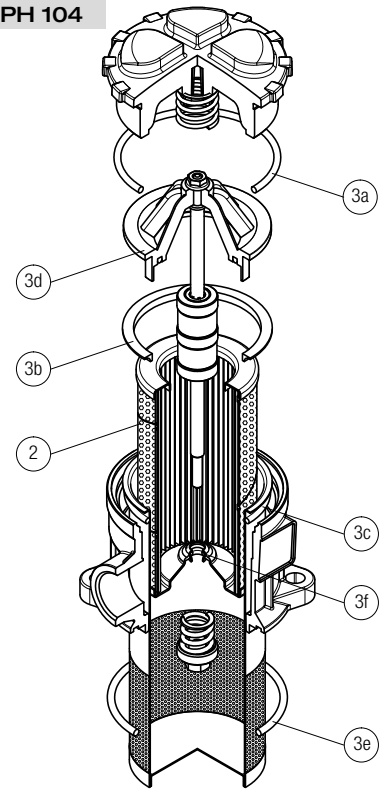


Q.ty: 1 pc.

Q.ty: 1 pc.

Item: **2** **3** (3a ÷ 3f)

Filter series	Filter element	Seal Kit code number NBR	FPM
<b>MPH 104</b>	See order table	02050390	02050409

## MPH 110 - 114

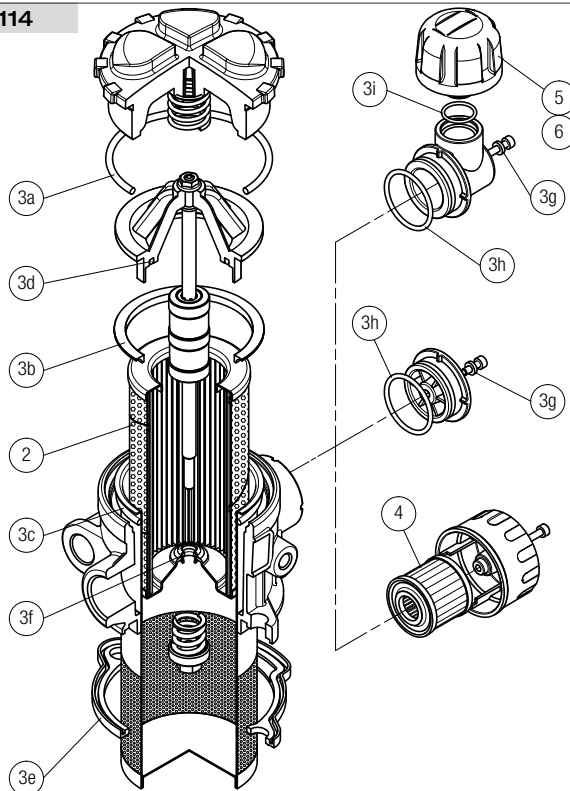

Q.ty: 1 pc.

Q.ty: 1 pc.


Q.ty: 1 pc.

Q.ty: 1 pc.

Q.ty: 1 pc.

Item:	<b>2</b>	<b>3</b> (3a ÷ 3f)	<b>4</b>	<b>5</b>	<b>6</b>
Filter series	Filter element	Seal Kit code number NBR	FPM	Air breather filter element - version:	
			C	D	P
<b>MPH 110</b>	See order table	02050565	02050566	10 µm	10 µm
<b>MPH 114</b>		02050582	02050583	A3L03	SAP50G3L03A0P01
					10 µm
					SAP50G3L03A1P01

## MPH 120

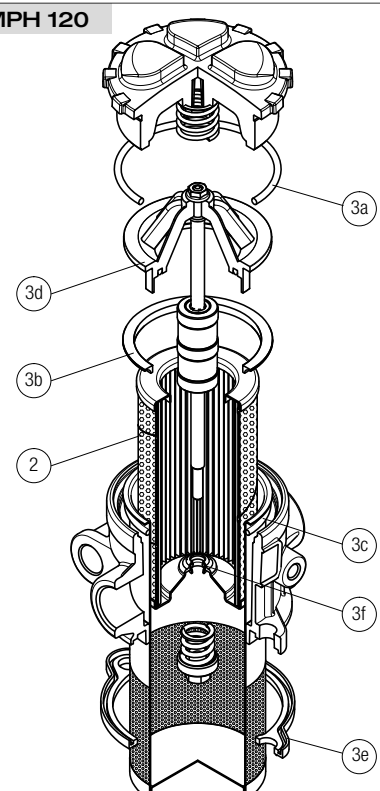


Q.ty: 1 pc.

Q.ty: 1 pc.

Item: **2** **3** (3a ÷ 3f)


Filter series	Filter element	Seal Kit code number NBR	FPM
<b>MPH 120</b>	See order table	02050567	02050568

**MPH 250 - 630**

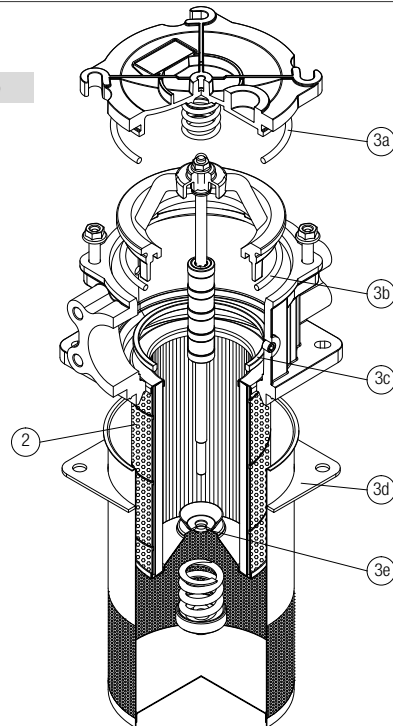


Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3e)
Filter series	Filter element	Seal Kit code number NBR FPM
<b>MPH 250</b>	See order table	02050151 02050152
<b>MPH 630</b>	See order table	02050153 02050154

**MPH 660**

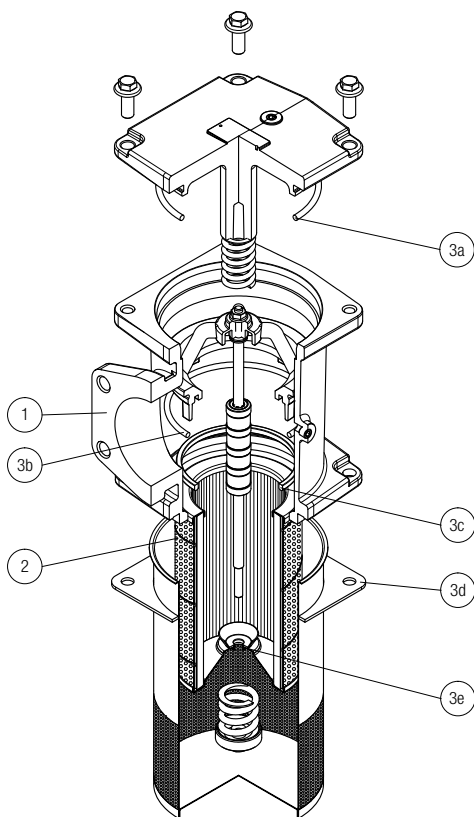

Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3e)
Filter series	Filter element	Seal Kit code number NBR FPM
<b>MPH 660</b>	See order table	02050153 02050154
<b>MPH 850</b>	See order table	02050155 02050156

**MPH 850**

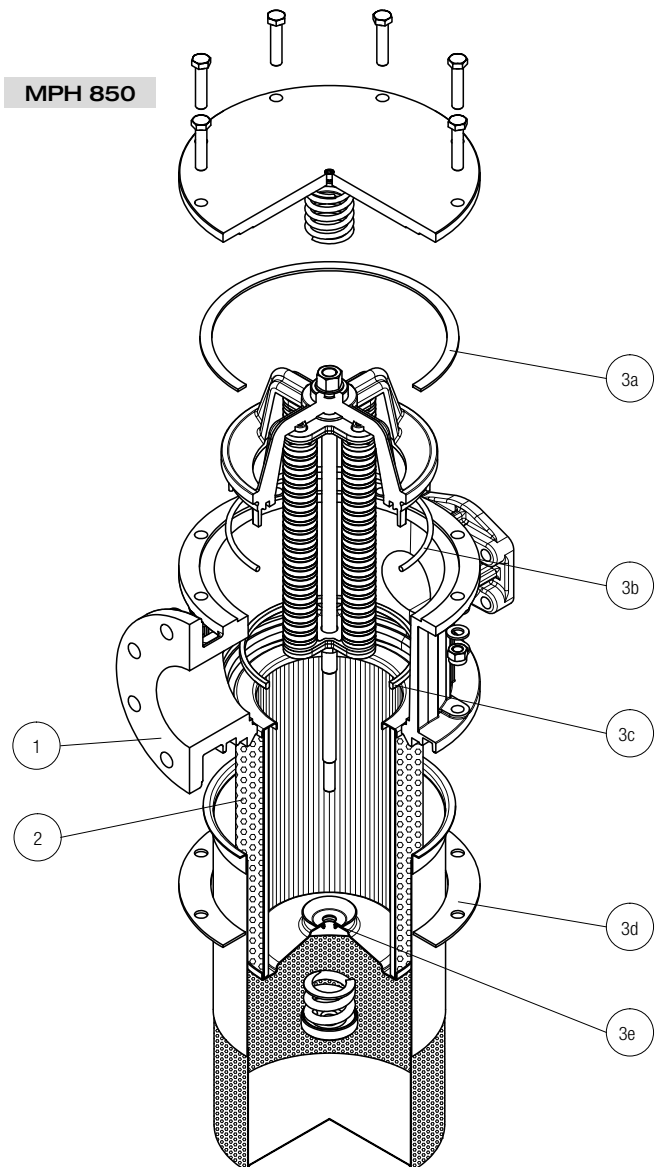





## Technical data

**Return filter** Maximum pressure up to 10 bar - Flow rate up to 3000 l/min

### Filter housing materials

- Insert assembly:  
Polyamide, GF reinforced (only for: MPI 100)  
Aluminium (the other insert assemblies)

- Diffuser: Zinc Plated Steel

- Valve: Steel

### Pressure

Working pressure: 1 MPa (10 bar)

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)
- Opening pressure 250 kPa (2.5 bar) (except for MPI 850)

### $\Delta p$ element type

- Microfibre filter elements - series MR: 10 bar
- Fluid flow through the filter element from IN to OUT.

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C


### Note

MPI filters are provided for vertical mounting

## Weights [kg] and volumes [dm<sup>3</sup>]

	Weights [kg]					Volumes [dm <sup>3</sup> ]				
	Lenght	1	2	3	4	Lenght	1	2	3	4
<b>MPI 100</b>		0.90	1.00	1.20	1.50		0.90	0.90	1.20	1.60
<b>MPI 250</b>		2.20	2.50	2.90	4.30		3.50	3.50	4.50	7.00
<b>MPI 630</b>		3.40	3.90	4.30	5.40		5.80	7.40	9.50	11.4
<b>MPI 850</b>		15.2	18.2	21.2	25.2		8.80	12.2	16.7	20.8

## Hydraulic symbol



# MPI MPI100 - MPI250 - MPI630 - MPI850



## Designation & Ordering code

### COMPLETE FILTER



<b>Series and size</b>					Configuration example 1: <b>MPI100</b>   <b>1</b>   <b>C</b>   <b>D</b>   <b>A</b>   <b>A10</b>   <b>P01</b>						
<b>MPI100</b>					Configuration example 2: <b>MPI630</b>   <b>5</b>   <b>E</b>   <b>D</b>   <b>Z</b>   <b>M25</b>   <b>P01</b>						
<b>MPI250</b>											
<b>MPI630</b>											
<b>MPI850</b>											
<b>Length</b>					<b>MPI100</b>	<b>MPI250</b>	<b>MPI630</b>	<b>MPI850</b>			
<b>1</b>		•	•	•	•						
<b>2</b>		•	•	•	•						
<b>3</b>		•	•	•	•						
<b>4</b>		•	•	•	•						
<b>5</b>		•	•	•	•						
<b>Bypass valve</b>					<b>MPI100</b>	<b>MPI250</b>	<b>MPI630</b>	<b>MPI850</b>			
<b>S</b>	Without	•	•	•	•						
<b>C</b>	1.75 bar	•	•	•	•						
<b>E</b>	2.5 bar	•	•	•	•						
<b>Diffuser and magnetic column</b>											
<b>D</b>	With diffuser, with magnetic column										
<b>F</b>	With diffuser, without magnetic column										
<b>O</b>	Without diffuser, with magnetic column										
<b>E</b>	Without diffuser, without magnetic column										
					<b>Filtration rating</b>						
<b>Seals and treatments</b>					<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>				
<b>A</b>	NBR				•	•	•				
<b>V</b>	FPM				•	•	•				
<b>W</b>	NBR	head anodized	filter element compatible with fluids HFA-HFB-HFC		•	•					
<b>Z</b>	FPM	head anodized			•	•					
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber	3 µm	<b>M25</b>	Wire mesh	25 µm						
<b>A06</b>	Inorganic microfiber	6 µm	<b>M60</b>	Wire mesh	60 µm						
<b>A10</b>	Inorganic microfiber	10 µm	<b>M90</b>	Wire mesh	90 µm						
<b>A16</b>	Inorganic microfiber	16 µm	<b>P10</b>	Resin impregnated paper	10 µm						
<b>A25</b>	Inorganic microfiber	25 µm	<b>P25</b>	Resin impregnated paper	25 µm						
					<b>Execution</b>						
					<b>P01</b> MP Filtri standard						
					<b>Pxx</b> Customized						



### FILTER ELEMENT

<b>Element series and size</b>					Configuration example 1: <b>MR100</b>   <b>1</b>   <b>A10</b>   <b>A</b>   <b>P01</b>					
<b>MR100</b>					Configuration example 2: <b>MR630</b>   <b>5</b>   <b>M25</b>   <b>V</b>   <b>P01</b>					
<b>MR250</b>										
<b>MR630</b>										
<b>MR850</b>										
<b>Element length</b>					<b>Size 100</b>	<b>Size 250</b>	<b>Size 630</b>	<b>Size 850</b>		
<b>1</b>		•	•	•	•					
<b>2</b>		•	•	•	•					
<b>3</b>		•	•	•	•					
<b>4</b>		•	•	•	•					
<b>5</b>		•	•	•	•					
<b>Filtration rating (filter media)</b>										
<b>A03</b>	Inorganic microfiber	3 µm	<b>M25</b>	Wire mesh	25 µm					
<b>A06</b>	Inorganic microfiber	6 µm	<b>M60</b>	Wire mesh	60 µm					
<b>A10</b>	Inorganic microfiber	10 µm	<b>M90</b>	Wire mesh	90 µm					
<b>A16</b>	Inorganic microfiber	16 µm	<b>P10</b>	Resin impregnated paper	10 µm					
<b>A25</b>	Inorganic microfiber	25 µm	<b>P25</b>	Resin impregnated paper	25 µm					
					<b>Seals</b>		<b>Execution</b>			
					<b>A</b> NBR		<b>P01</b> MP Filtri standard			
					<b>V</b> FPM		<b>Pxx</b> Customized			

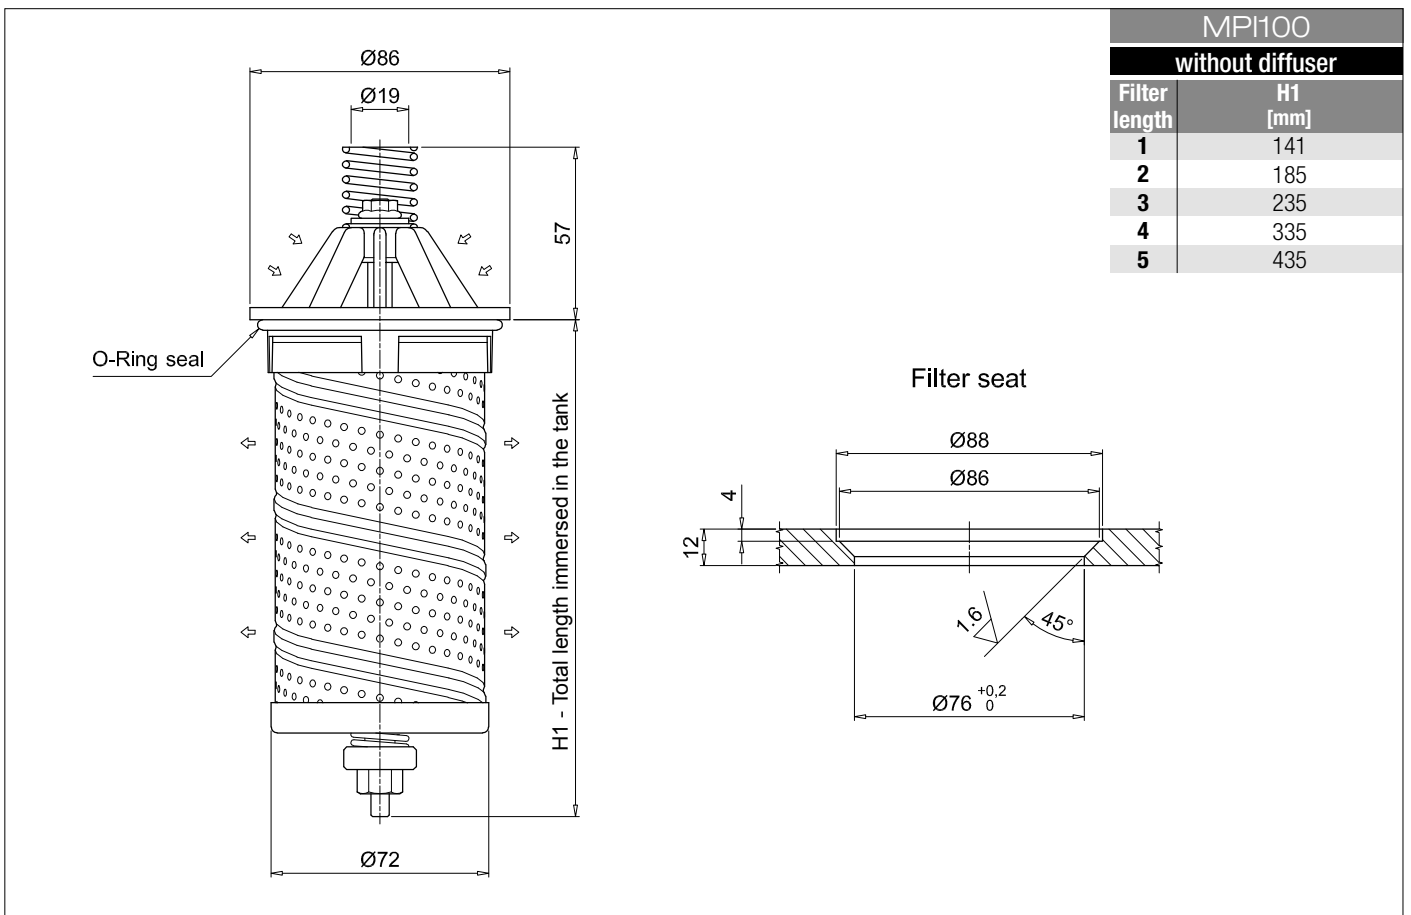
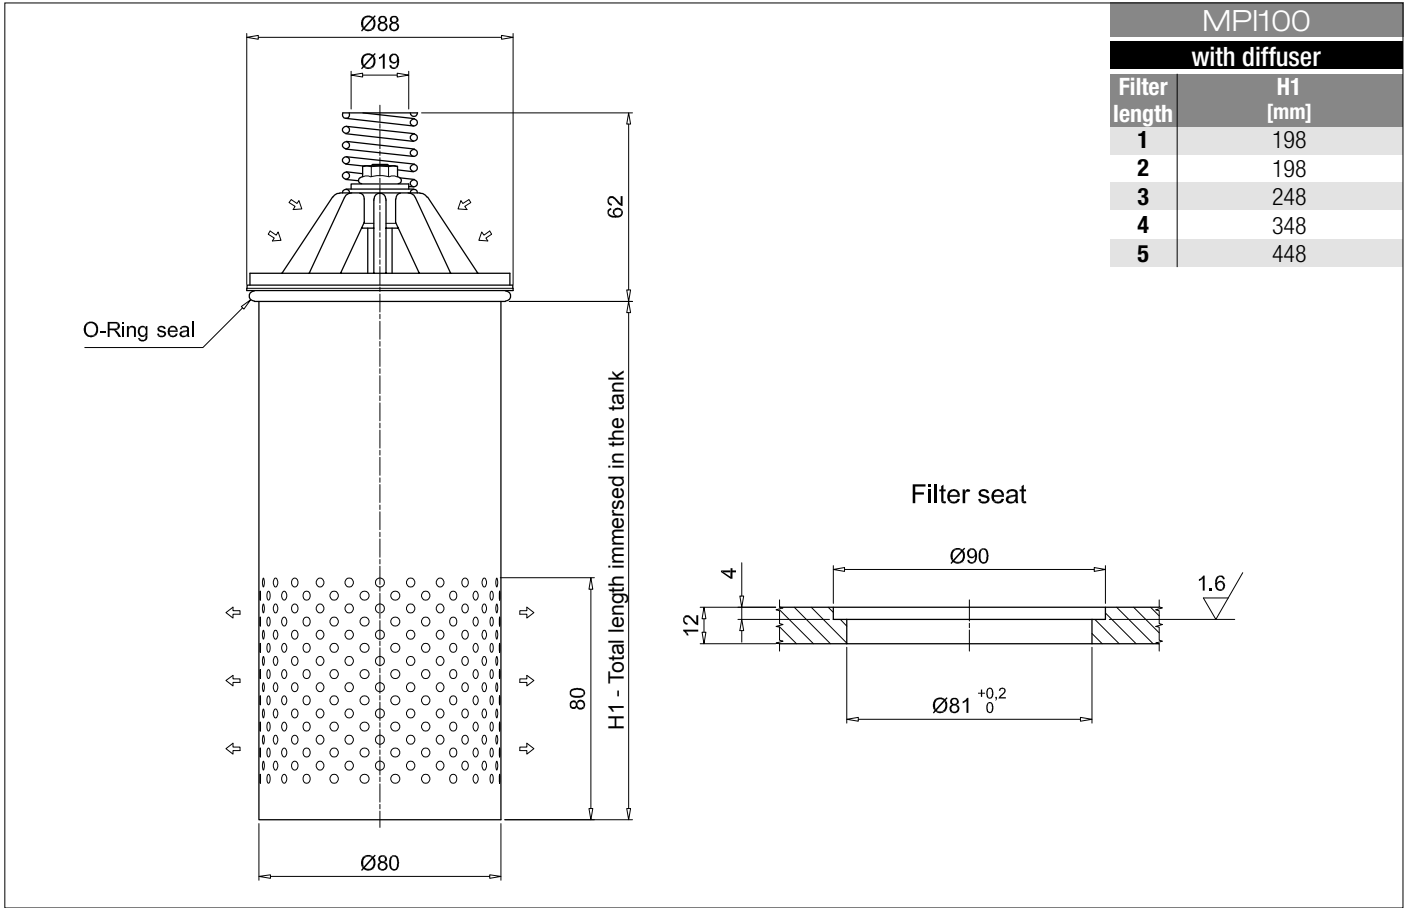


## Dimensions

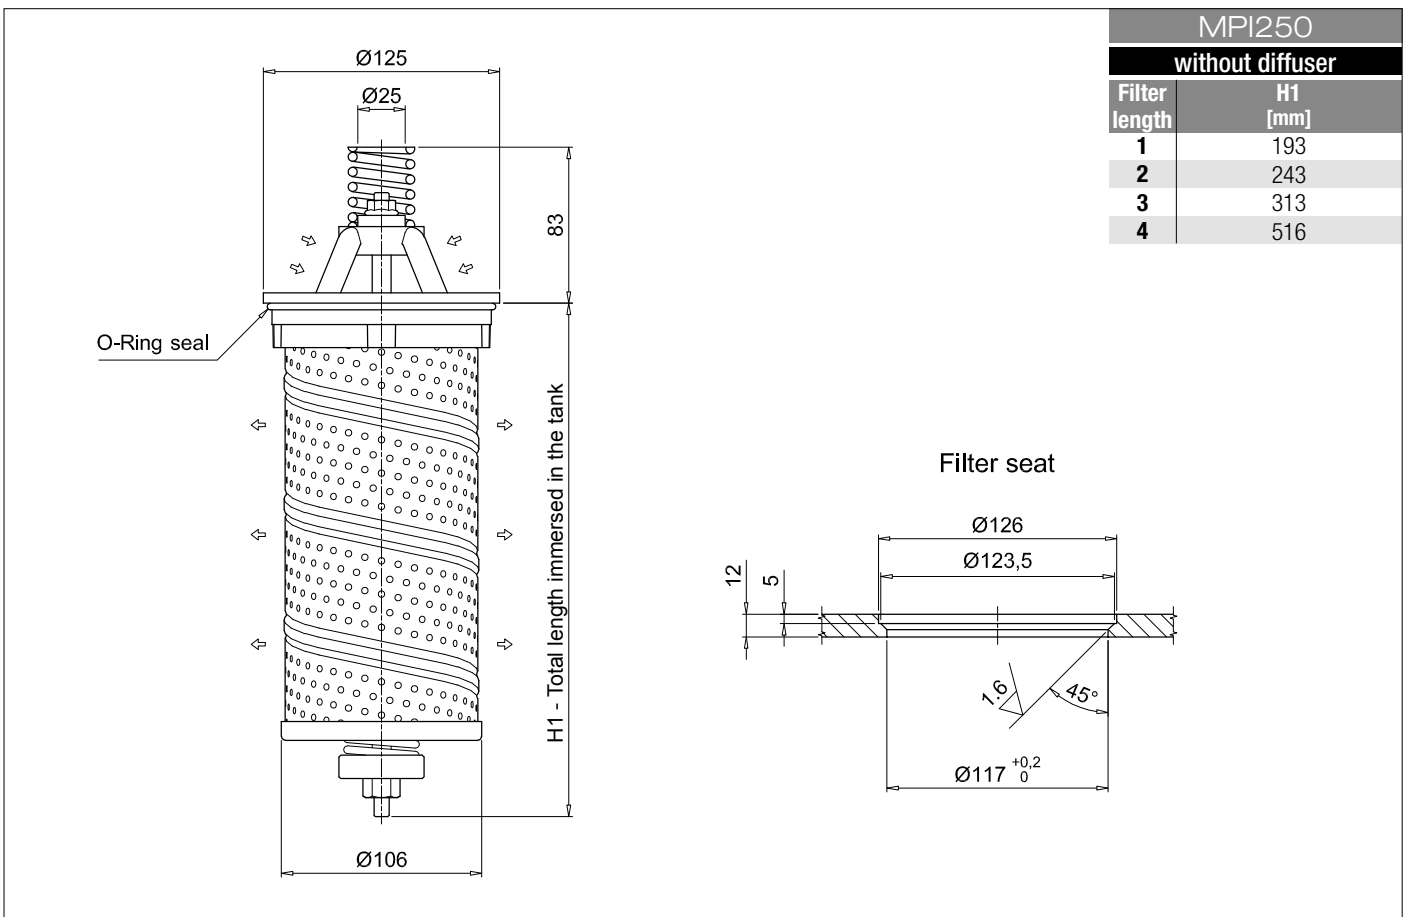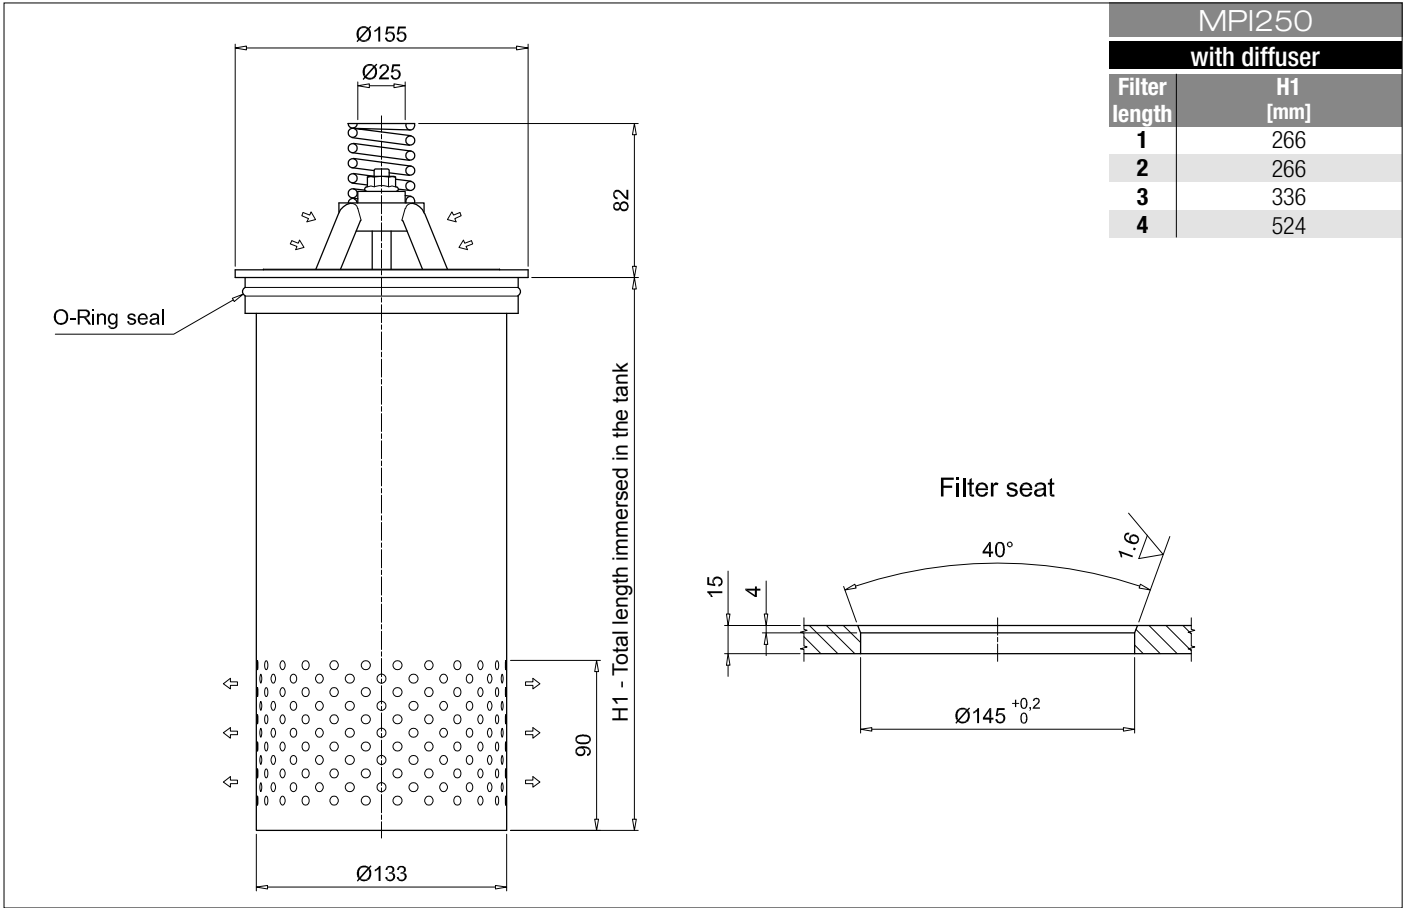

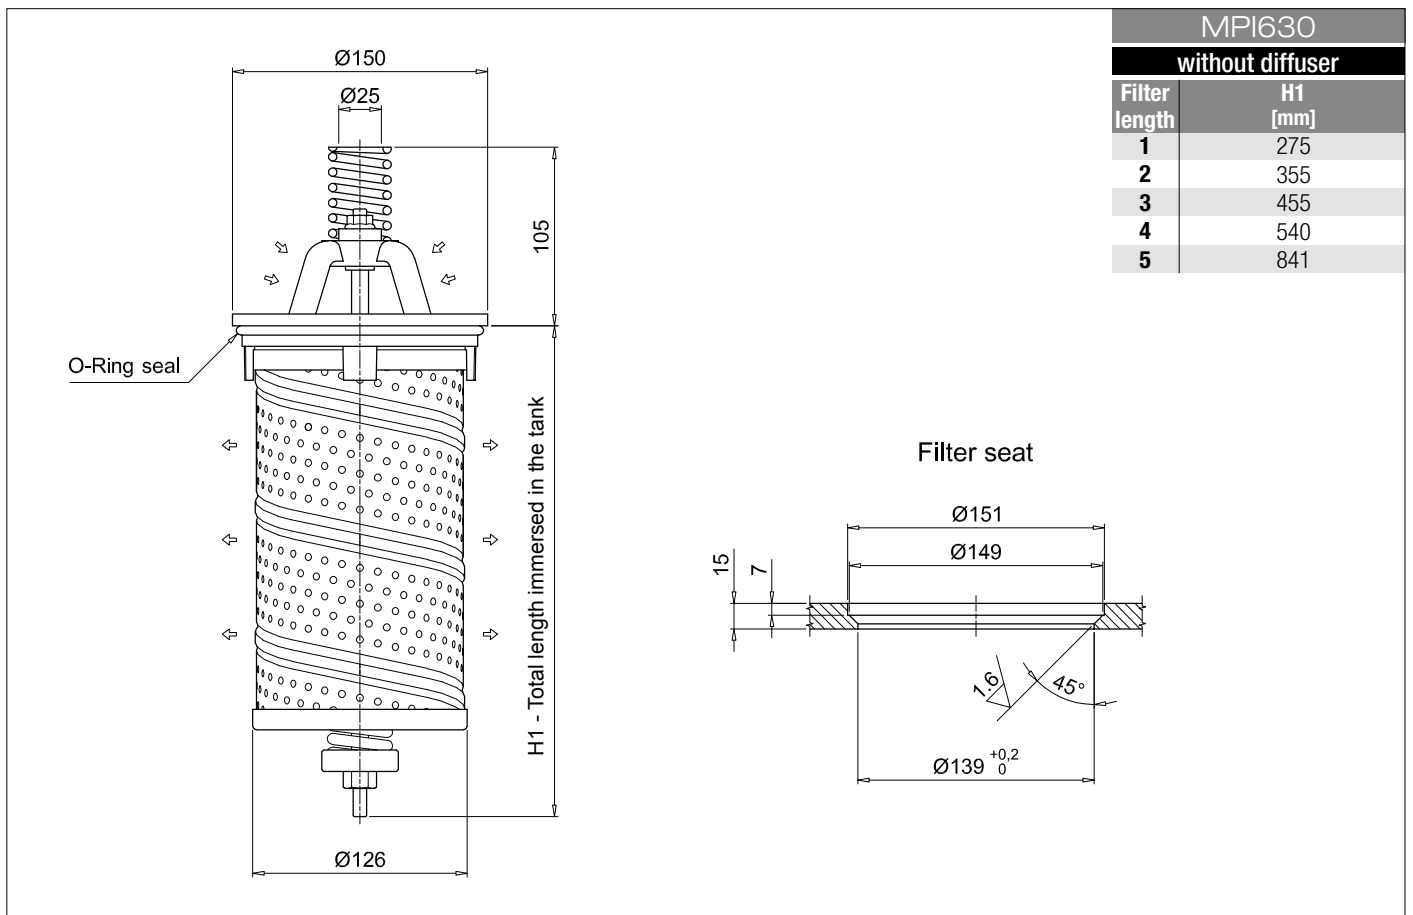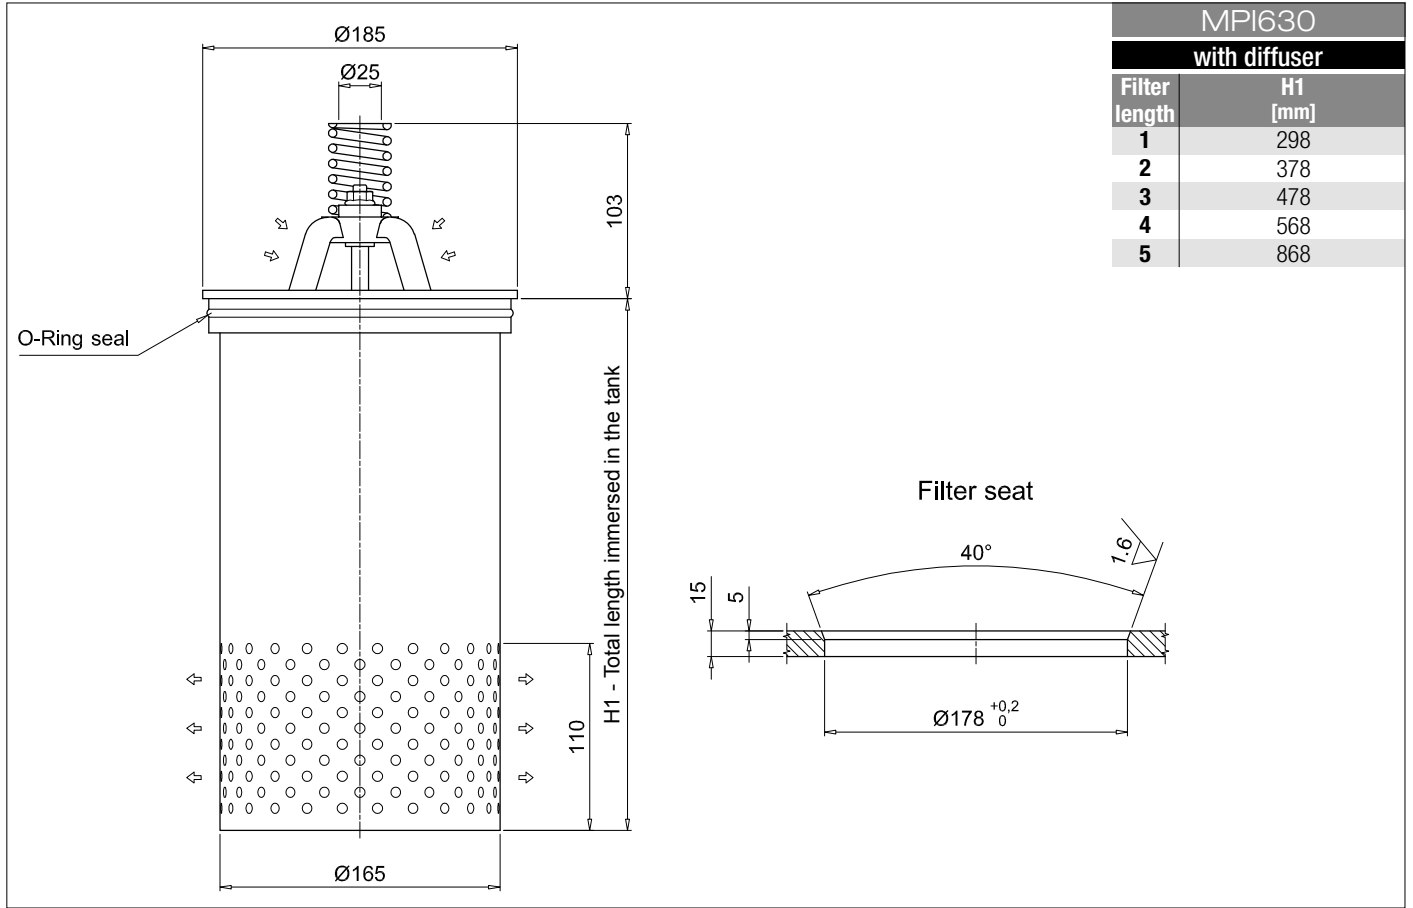


## Dimensions

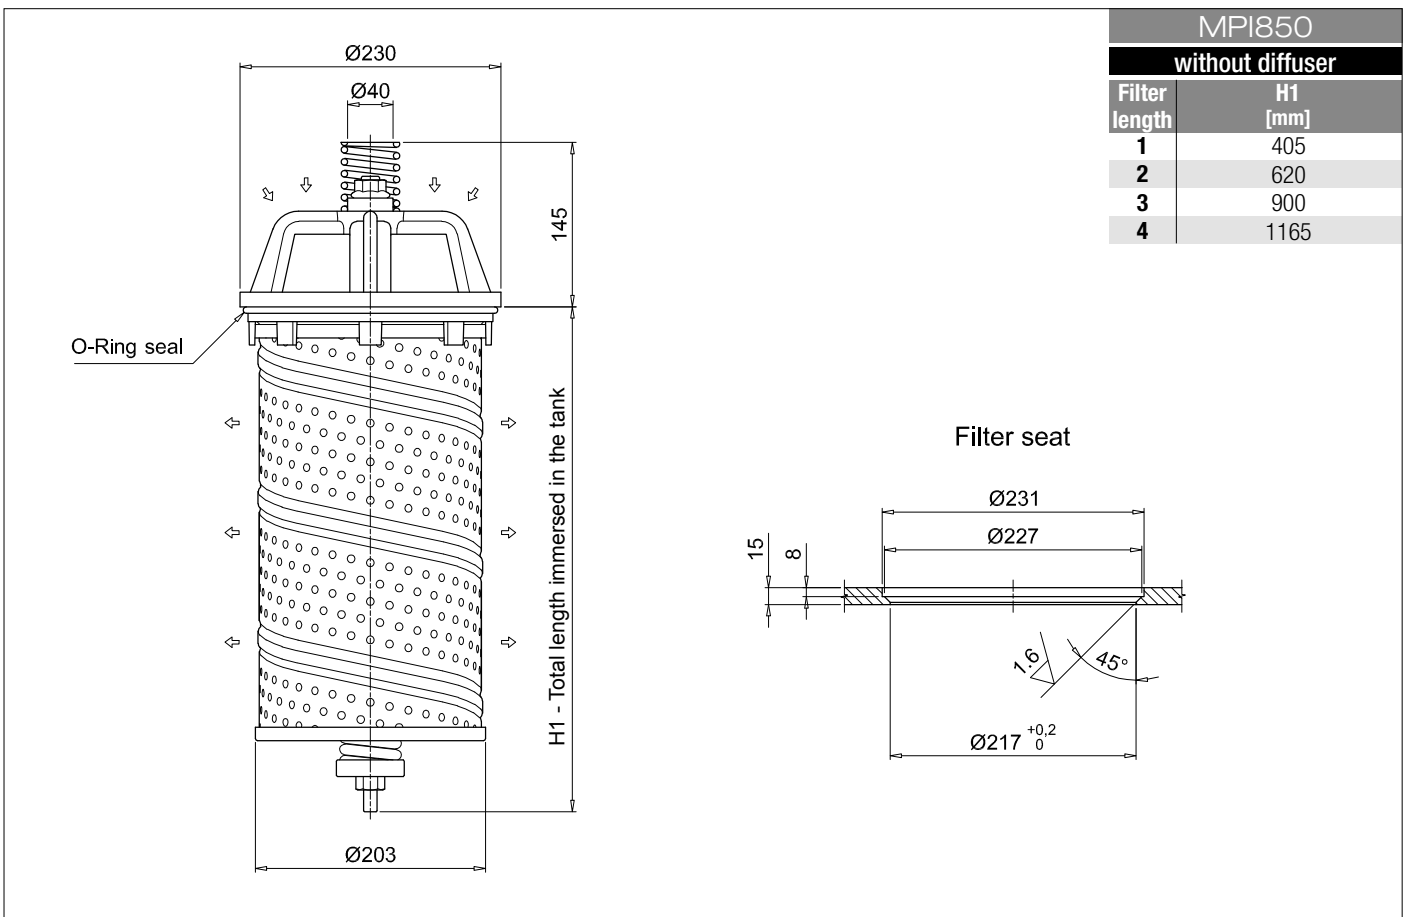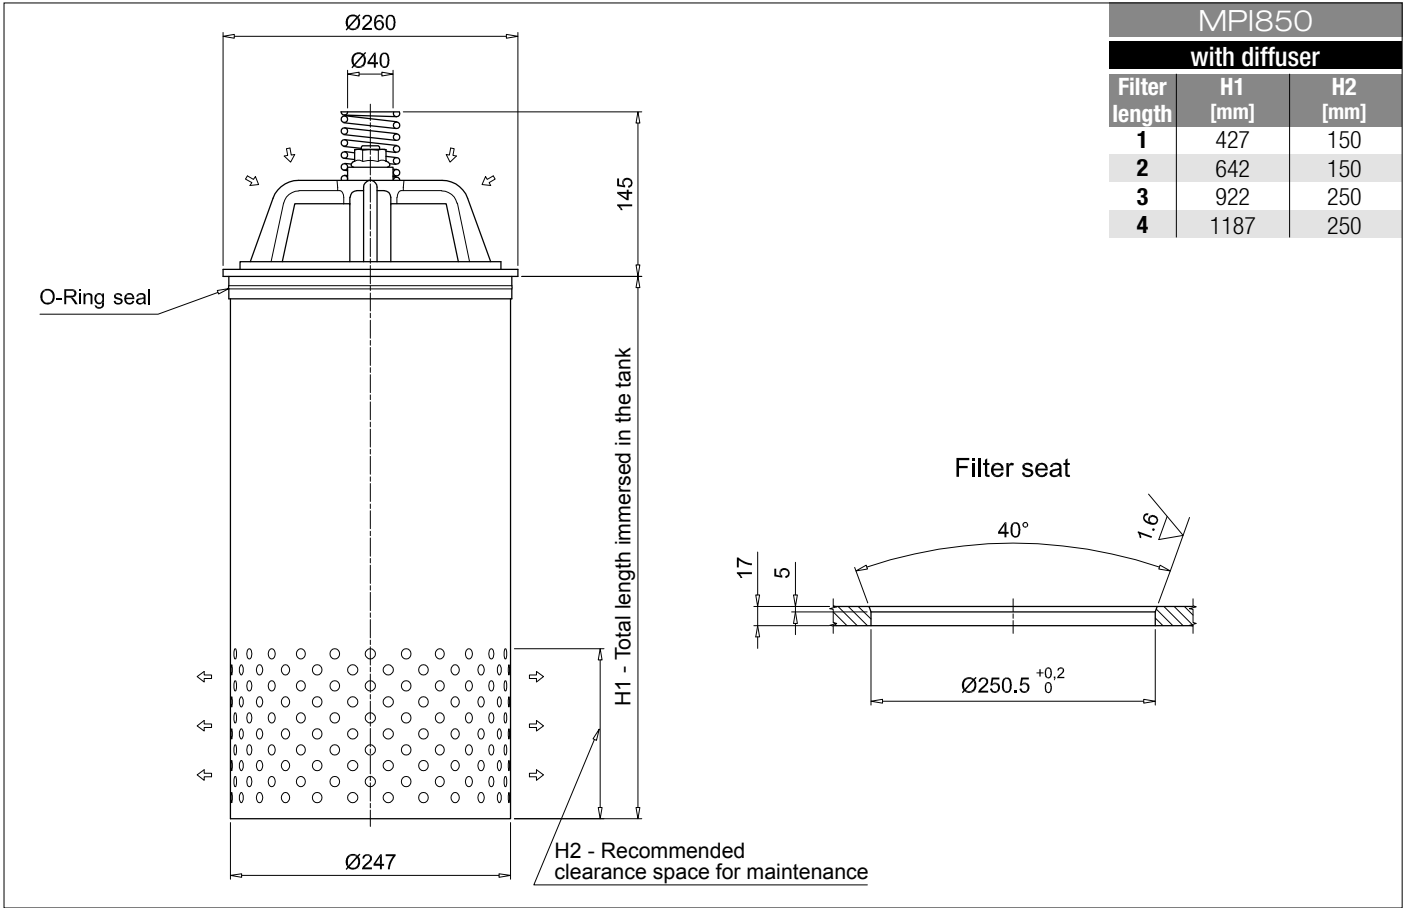




# MPI SPARE PARTS

Order number for spare parts

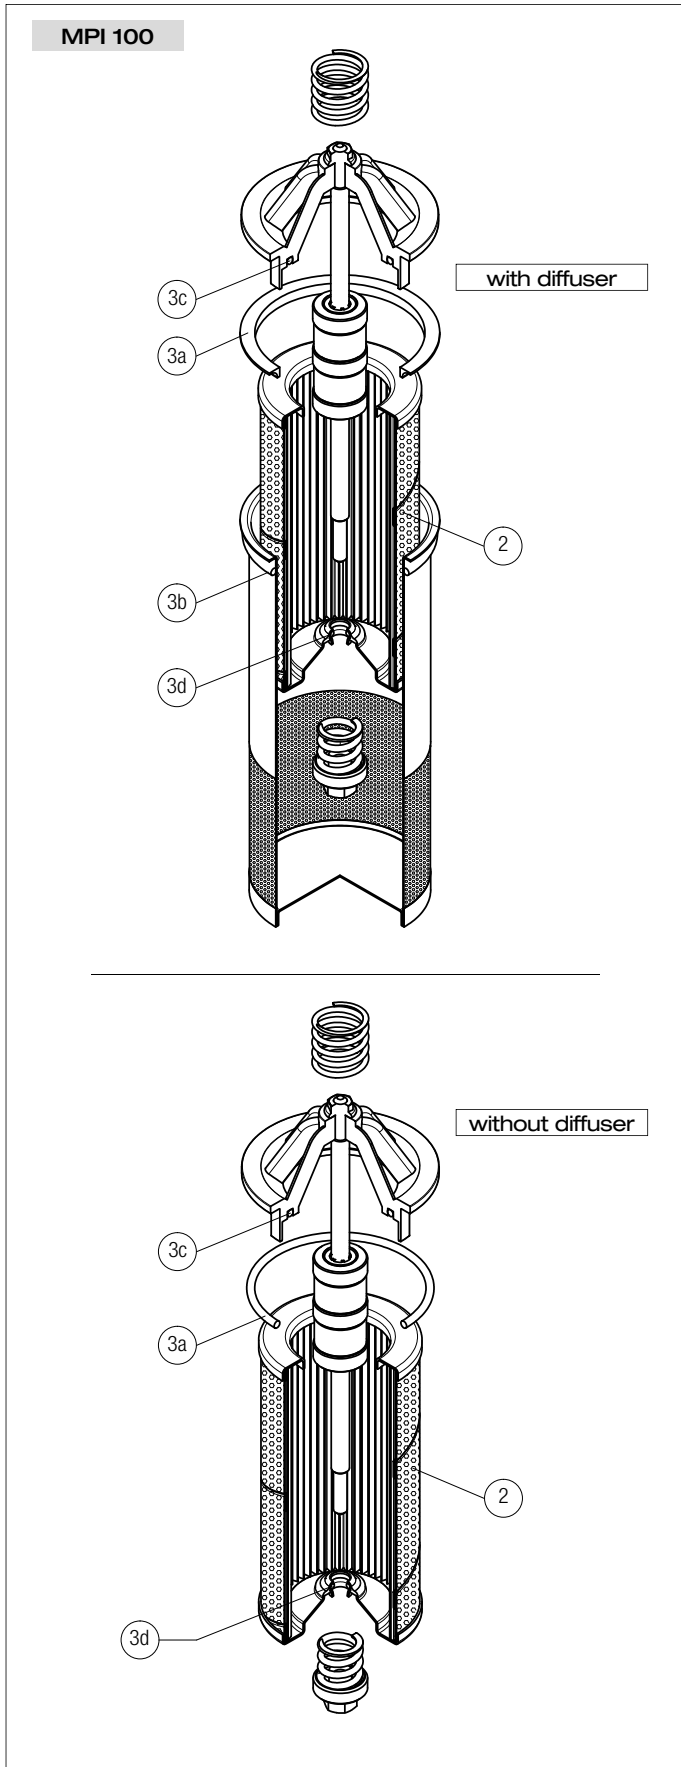



Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3d)
Filter series	Filter element	Seal Kit code number NBR FPM
<b>MPI 100</b>	See order table	02050145 02050146

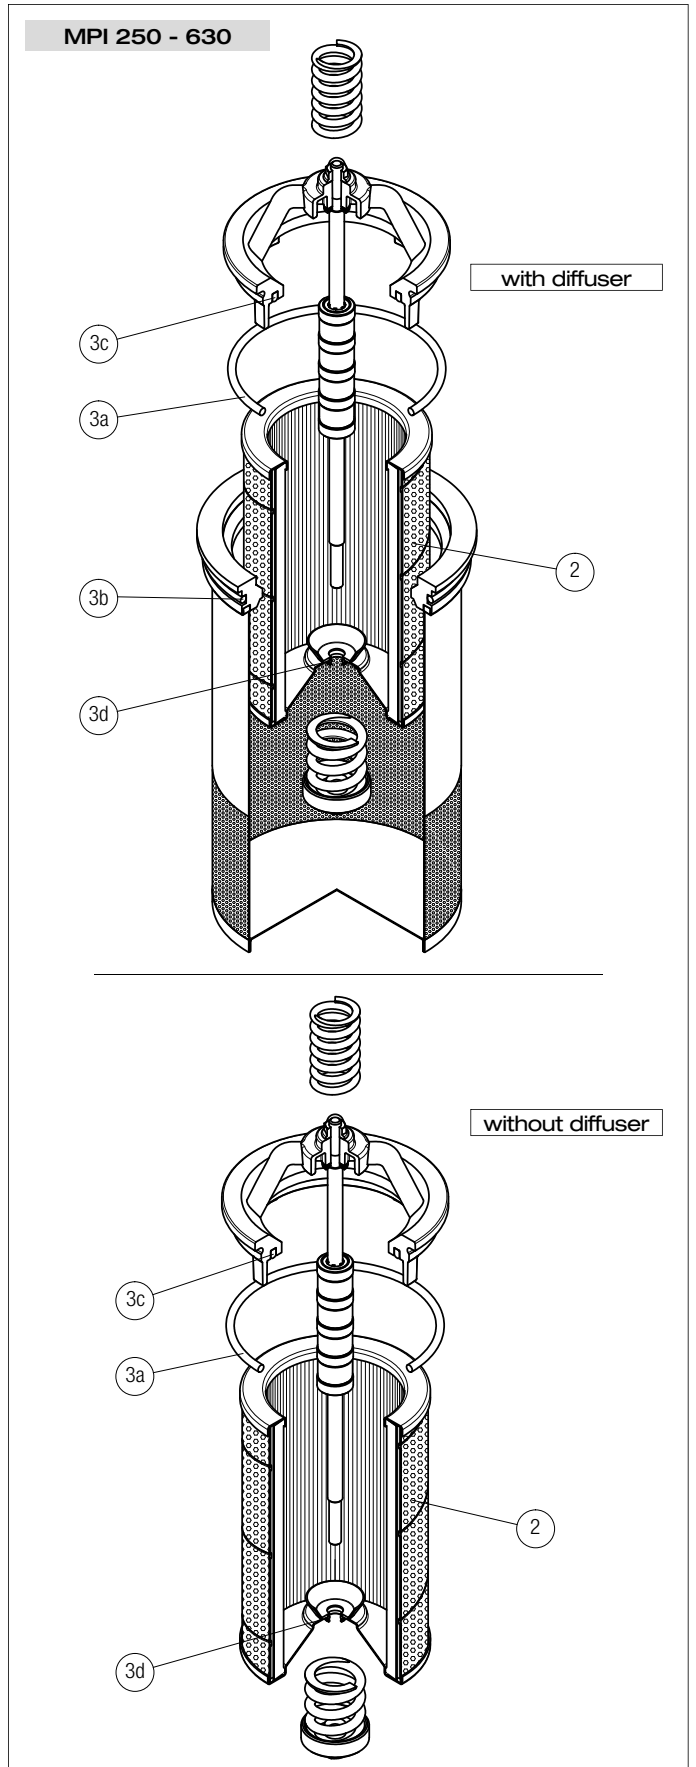

Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3d)
Filter series	Filter element	Seal Kit code number NBR FPM
<b>MPI 250</b> <b>MPI 630</b>	See order table	02050147 02050148 02050112 02050113



MPI 850

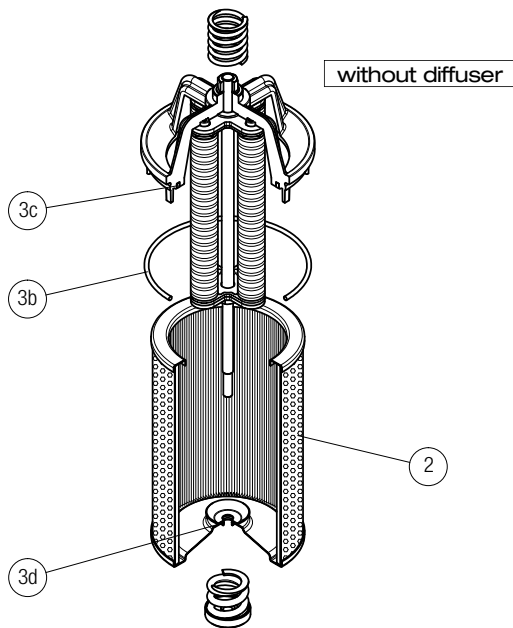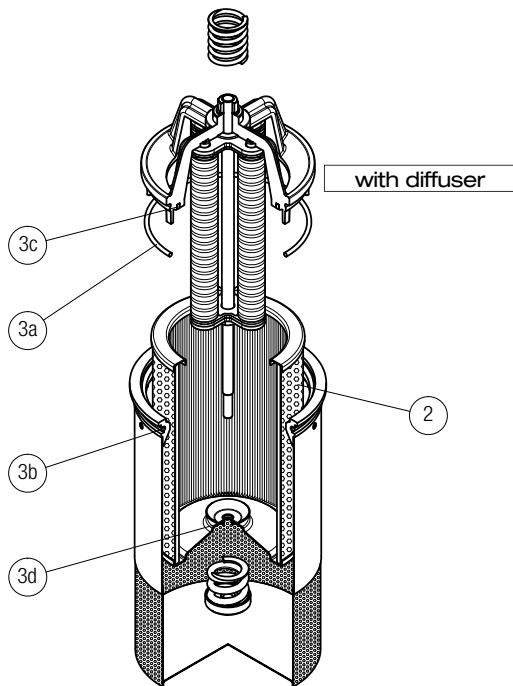

Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3d)
Filter series	Filter element	Seal Kit code number NBR FPM
MPI 850	See order table	02050114 02050115



# FRI series

Maximum pressure up to 20 bar - Flow rate up to 1500 l/min



## Technical data

**Return filter** Maximum pressure up to 20 bar - Flow rate up to 1500 l/min

### Filter housing materials

- Filter body:
  - Aluminium: FRI 255
  - Anodized Aluminium: FRI 025-040-100-250-630
  - Phosphated Steel: FRI 850

- Cover:
  - Polyamide, GF reinforced (only for: FRI 255)
  - Anodized Aluminium (the other insert assemblies)

- Valve:
  - Polyamide, GF reinforced - Steel

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

FRI filters are provided for vertical mounting

### Pressure

Working pressure: 2 MPa (20 bar)

### Bypass valve

Opening pressure 240 kPa (2.4 bar)

### $\Delta p$ element type


- Microfibre filter elements - series N: 10 bar
- Fluid flow through the filter element from OUT to IN.

## Weights [kg] and volumes [dm<sup>3</sup>]


	Weights [kg]		Volumes [dm <sup>3</sup> ]	
	Lenght	1	Lenght	1
<b>FRI 025</b>		1.0		0.28
<b>FRI 040</b>		2.0		0.70
<b>FRI 100</b>		3.8		1.09
<b>FRI 250</b>		6.3		2.60
<b>FRI 255</b>		4.2		3.20
<b>FRI 630</b>		13.8		7.05
<b>FRI 850</b>		48.0		21.50

## Hydraulic symbols

Style  
2 connections + Diff. indic.  
FRI 255-850

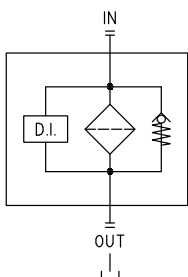




Style  
3 connections + Diff. indic.  
FRI 025-040-100-250-630

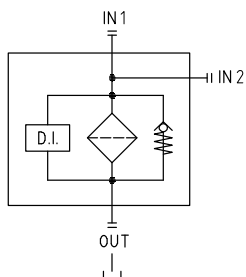





The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.

$\Delta p$  varies proportionally with density.

Filter housings  $\Delta p$  pressure drop

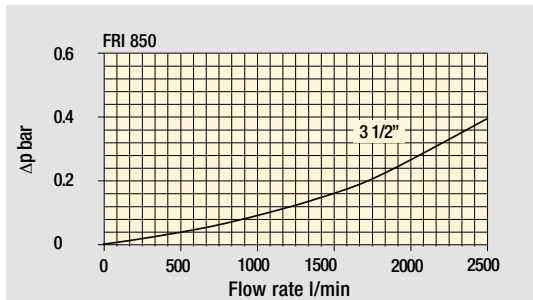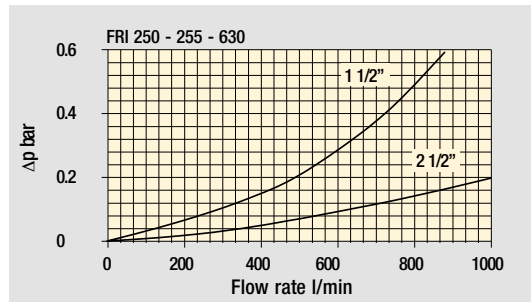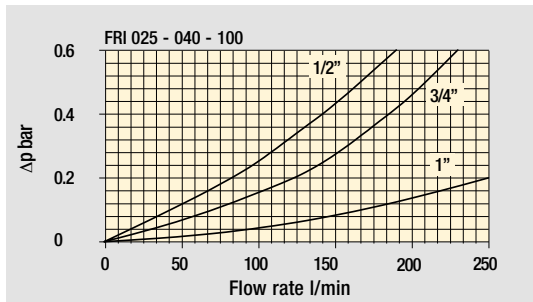

Bypass valve pressure drop

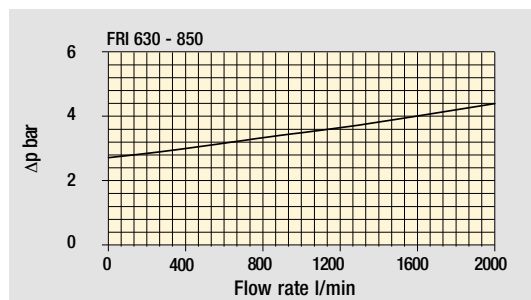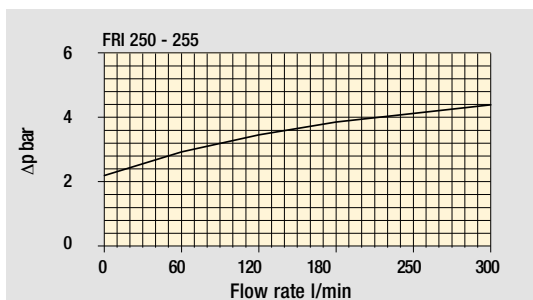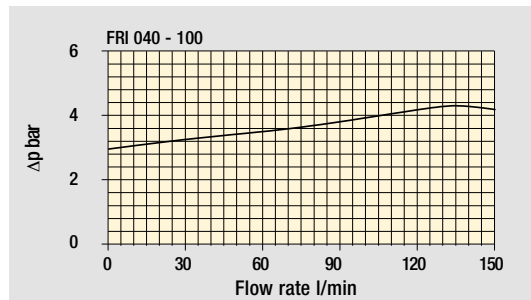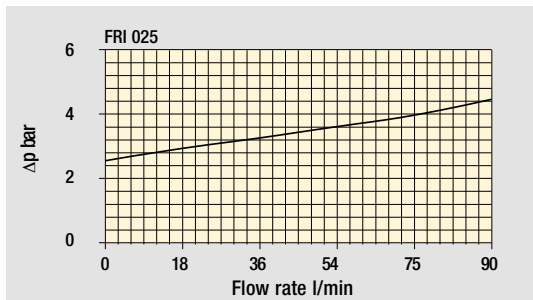

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>FRI025</b> <b>B</b> <b>A</b> <b>G1</b> <b>A25</b> <b>N</b> <b>P01</b>						
<b>FRI025</b>	Configuration example 2: <b>FRI040</b> <b>S</b> <b>W</b> <b>G2</b> <b>M25</b> <b>N</b> <b>P01</b>						
<b>FRI040</b>							
<b>Bypass valve</b>							
<b>B</b> With bypass							
<b>S</b> Without bypass							
<b>Seals and treatments</b>	Filtration rating						
<b>A</b> NBR	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>				
<b>V</b> FPM	•	•	•				
<b>W</b> NBR head anodized	•	•		filter element compatible with fluids HFA-HFB-HFC			
<b>Z</b> FPM head anodized	•	•					
<b>Connections for FRI025</b>	<b>Connections for FRI040</b>						
<b>G1</b> G1/2"	<b>G3/4"</b>						
<b>G2</b> 1/2" NPT	<b>3/4" NPT</b>						
<b>G3</b> SAE 8 - 3/4" - 16 UNF	<b>SAE 12 - 1 1/16" - 12 UN</b>						
<b>Filtration rating (filter media)</b>							
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm						
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm						
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm						
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm						
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm						
				<b>Element Δp</b>	<b>Execution</b>		
				<b>N</b> 10 bar	<b>P01</b> MP Filtri standard		
					<b>Pxx</b> Customized		


### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1: <b>CU025</b> <b>A25</b> <b>N</b> <b>P01</b>			
<b>CU025</b>	Configuration example 2: <b>CU040</b> <b>M25</b> <b>W</b> <b>P01</b>			
<b>CU040</b>				
<b>Filtration rating (filter media)</b>				
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm			
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm			
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm			
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm			
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm			
<b>Seals and treatments</b>	Filtration rating			
<b>N</b> NBR	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>	
<b>V</b> FPM	•	•	•	
<b>W</b> NBR	•	•		filter element compatible with fluids HFA-HFB-HFC
<b>Z</b> FPM	•	•		
				<b>Execution</b>
				<b>P01</b> MP Filtri standard
				<b>Pxx</b> Customized


### ACCESSORIES

<b>Indicators</b>	page		page
<b>DEA</b> Electrical differential indicator	218	<b>DTA</b> Electronic differential indicator	221
<b>DEM</b> Electrical differential indicator	218-219	<b>DVA</b> Visual differential indicator	221
<b>DLA</b> Electrical / visual differential indicator	219-220	<b>DVM</b> Visual differential indicator	221
<b>DLE</b> Electrical / visual differential indicator	220		
<b>Additional features</b>	page		
<b>T2</b> Plug	222		

FRI025

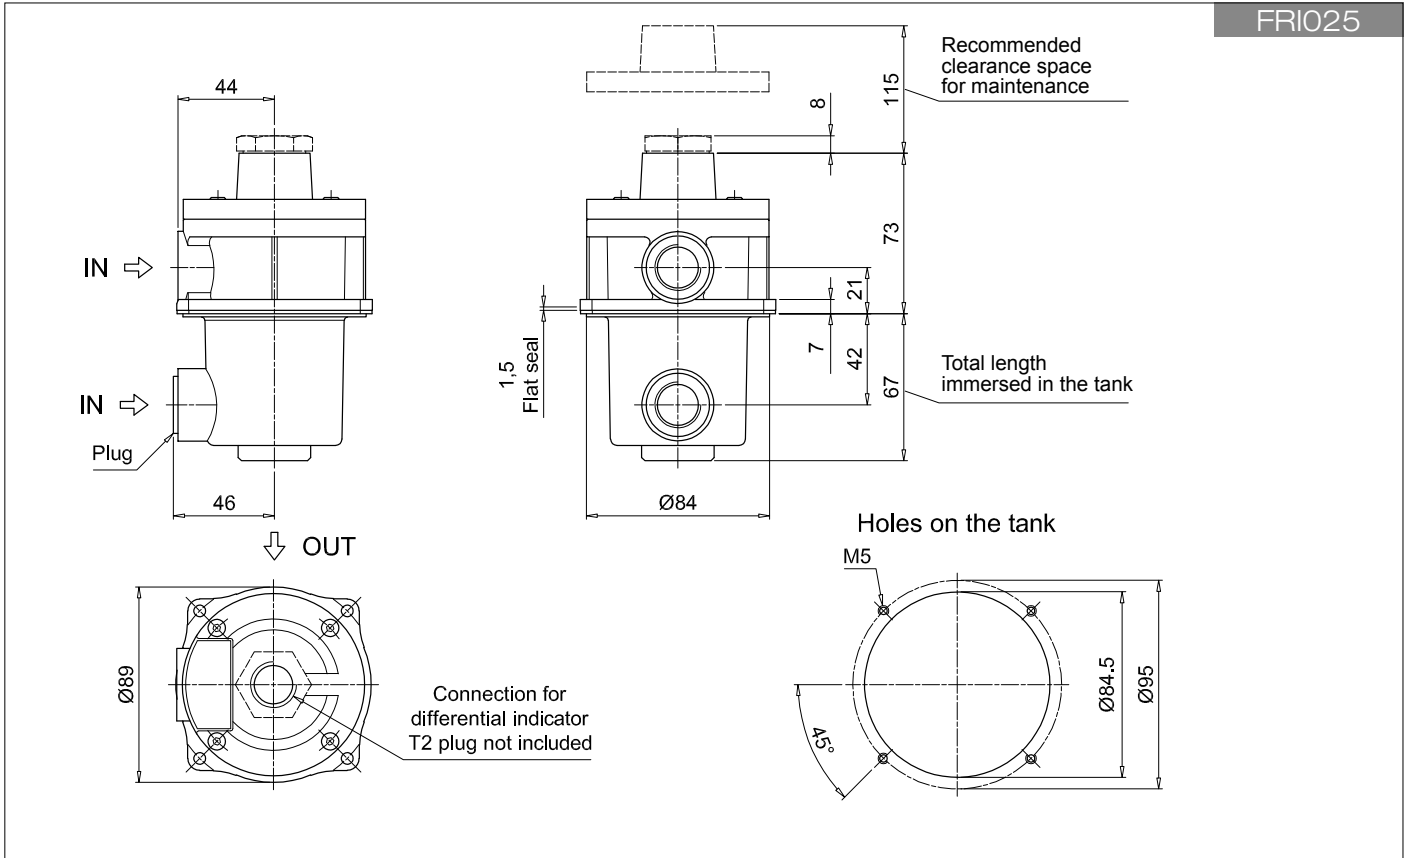

FRI040

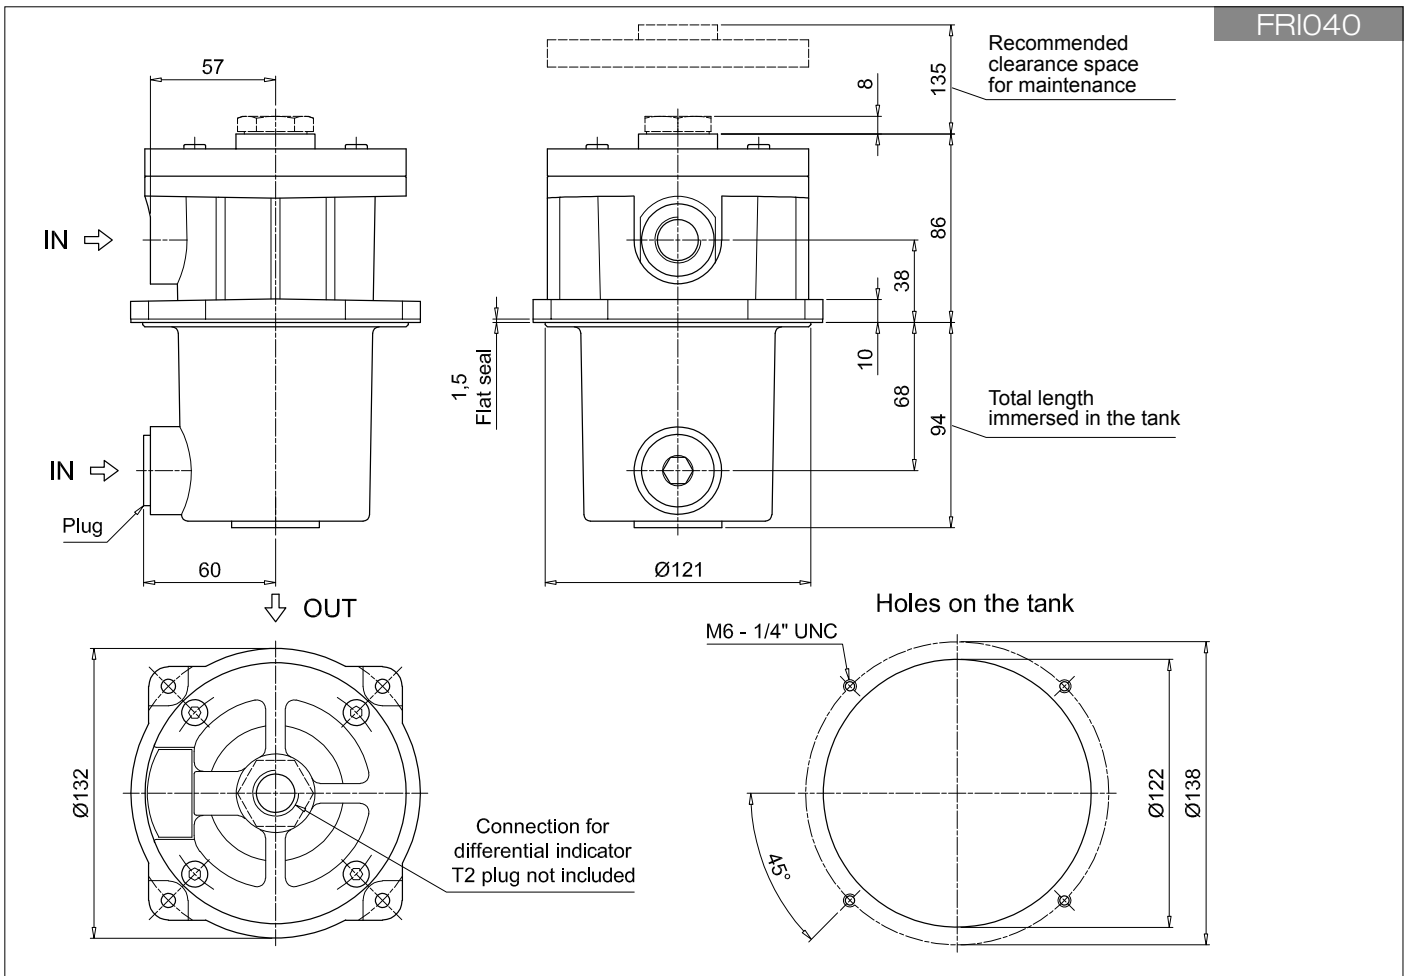

# FRI FRI100 - FRI250 - FRI630

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>FRI100</b> <b>B</b> <b>A</b> <b>G1</b> <b>A25</b> <b>N</b> <b>P01</b>						
<b>FRI100</b>	Configuration example 2: <b>FRI630</b> <b>S</b> <b>W</b> <b>F2</b> <b>M25</b> <b>N</b> <b>P01</b>						
<b>FRI250</b>							
<b>FRI630</b>							
<b>Bypass valve</b>							
<b>B</b>	With bypass						
<b>S</b>	Without bypass						
<b>Seals and treatments</b>							
		Filtration rating					
<b>A</b>	NBR	Axx	Mxx	Pxx			
<b>V</b>	FPM						
<b>W</b>	NBR head anodized				filter element compatible with fluids HFA-HFB-HFC		
<b>Z</b>	FPM head anodized						
<b>Connections for FRI100</b>		<b>Connections for FRI250</b>		<b>Connections for FRI630</b>			
<b>G1</b>	G1"	<b>G1</b>	G1 1/2"	<b>G2</b>	G2 1/2"		
<b>G2</b>	1" NPT	<b>G2</b>	1 1/2" NPT	<b>G3</b>	2 1/2" NPT		
<b>G3</b>	SAE 16 - 1 5/16" - 12 UN	<b>G3</b>	SAE 24 - 1 7/8" - 12 UN	<b>F1</b>	2 1/2" SAE 3000 psi/M		
<b>F1</b>	1" SAE 3000 psi/M	<b>F1</b>	1 1/2" SAE 3000 psi/M	<b>F2</b>	2 1/2" SAE 3000 psi/UNC		
<b>F2</b>	1" SAE 3000 psi/UNC	<b>F2</b>	1 1/2" SAE 3000 psi/UNC				
<b>Filtration rating (filter media)</b>							
<b>A03</b>	Inorganic microfiber	3 µm	<b>M25</b>	Wire mesh	25 µm	<b>Element Δp</b>	<b>Execution</b>
<b>A06</b>	Inorganic microfiber	6 µm	<b>M60</b>	Wire mesh	60 µm	<b>N</b>	10 bar
<b>A10</b>	Inorganic microfiber	10 µm	<b>M90</b>	Wire mesh	90 µm	<b>P01</b>	MP Filtri standard
<b>A16</b>	Inorganic microfiber	16 µm	<b>P10</b>	Resin impregnated paper	10 µm	<b>Pxx</b>	Customized
<b>A25</b>	Inorganic microfiber	25 µm	<b>P25</b>	Resin impregnated paper	25 µm		



### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1: <b>CU100</b> <b>A25</b> <b>N</b> <b>P01</b>			
<b>CU100</b>	Configuration example 2: <b>CU630</b> <b>M25</b> <b>W</b> <b>P01</b>			
<b>CU250</b>				
<b>CU630</b>				
<b>Filtration rating (filter media)</b>				
<b>A03</b>	Inorganic microfiber	3 µm	<b>M25</b>	Wire mesh 25 µm
<b>A06</b>	Inorganic microfiber	6 µm	<b>M60</b>	Wire mesh 60 µm
<b>A10</b>	Inorganic microfiber	10 µm	<b>M90</b>	Wire mesh 90 µm
<b>A16</b>	Inorganic microfiber	16 µm	<b>P10</b>	Resin impregnated paper 10 µm
<b>A25</b>	Inorganic microfiber	25 µm	<b>P25</b>	Resin impregnated paper 25 µm
<b>Seals and treatments</b>				
		Filtration rating		
<b>N</b>	NBR	Axx	Mxx	Pxx
<b>V</b>	FPM			
<b>W</b>	NBR			
<b>Z</b>	FPM			
				filter element compatible with fluids HFA-HFB-HFC
<b>Execution</b>				
<b>P01</b>	MP Filtri standard			
<b>Pxx</b>	Customized			



### ACCESSORIES



<b>Indicators</b>	page		page
<b>DEA</b>	Electrical differential indicator	218	<b>DTA</b> Electronic differential indicator 221
<b>DEM</b>	Electrical differential indicator	218-219	<b>DVA</b> Visual differential indicator 221
<b>DLA</b>	Electrical / visual differential indicator	219-220	<b>DVM</b> Visual differential indicator 221
<b>DLE</b>	Electrical / visual differential indicator	220	
<b>Additional features</b>	page		
<b>T2</b>	Plug	222	



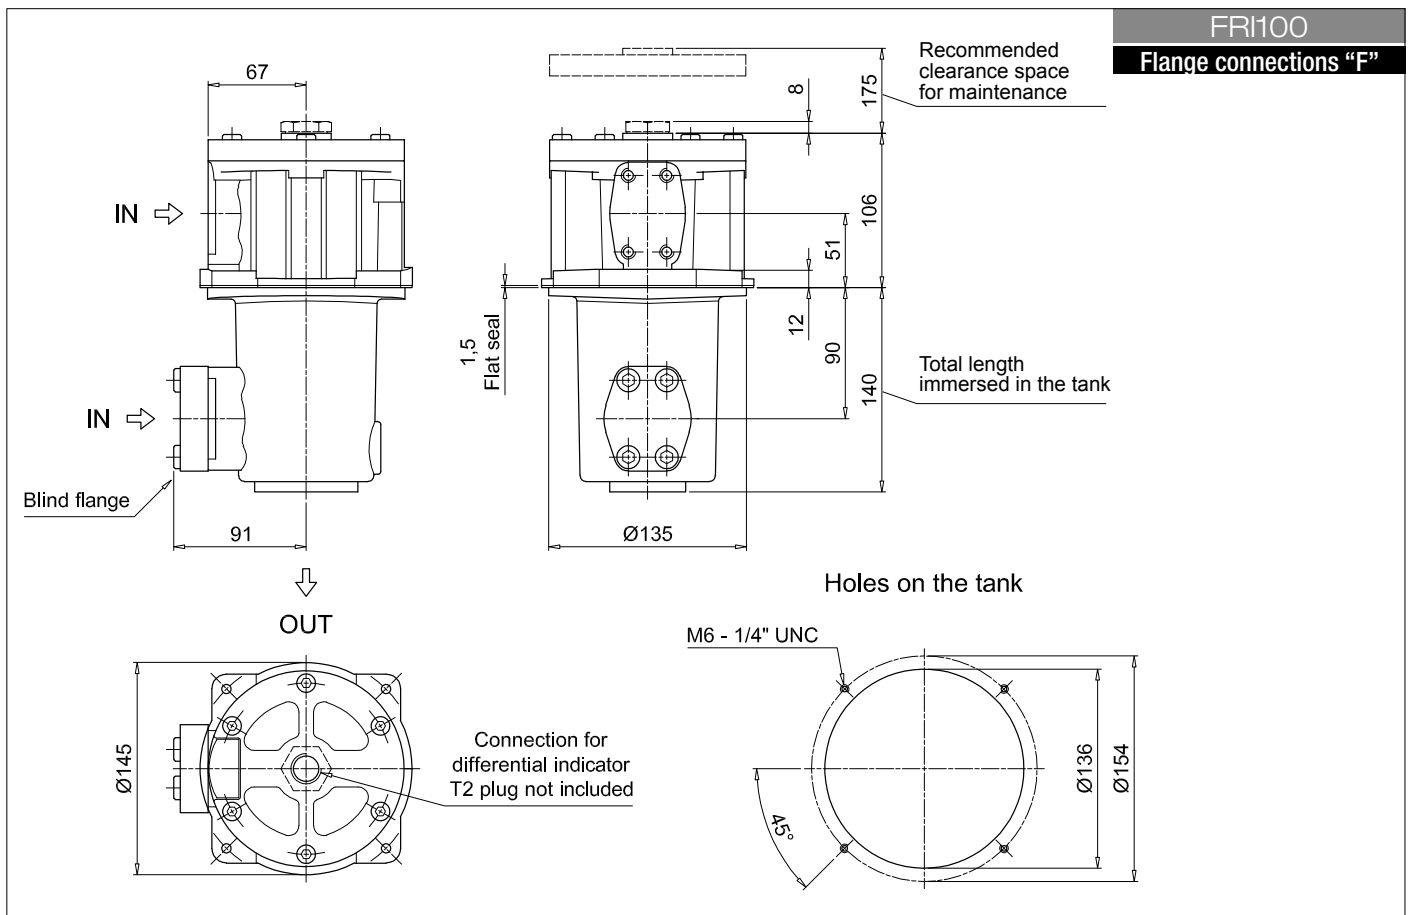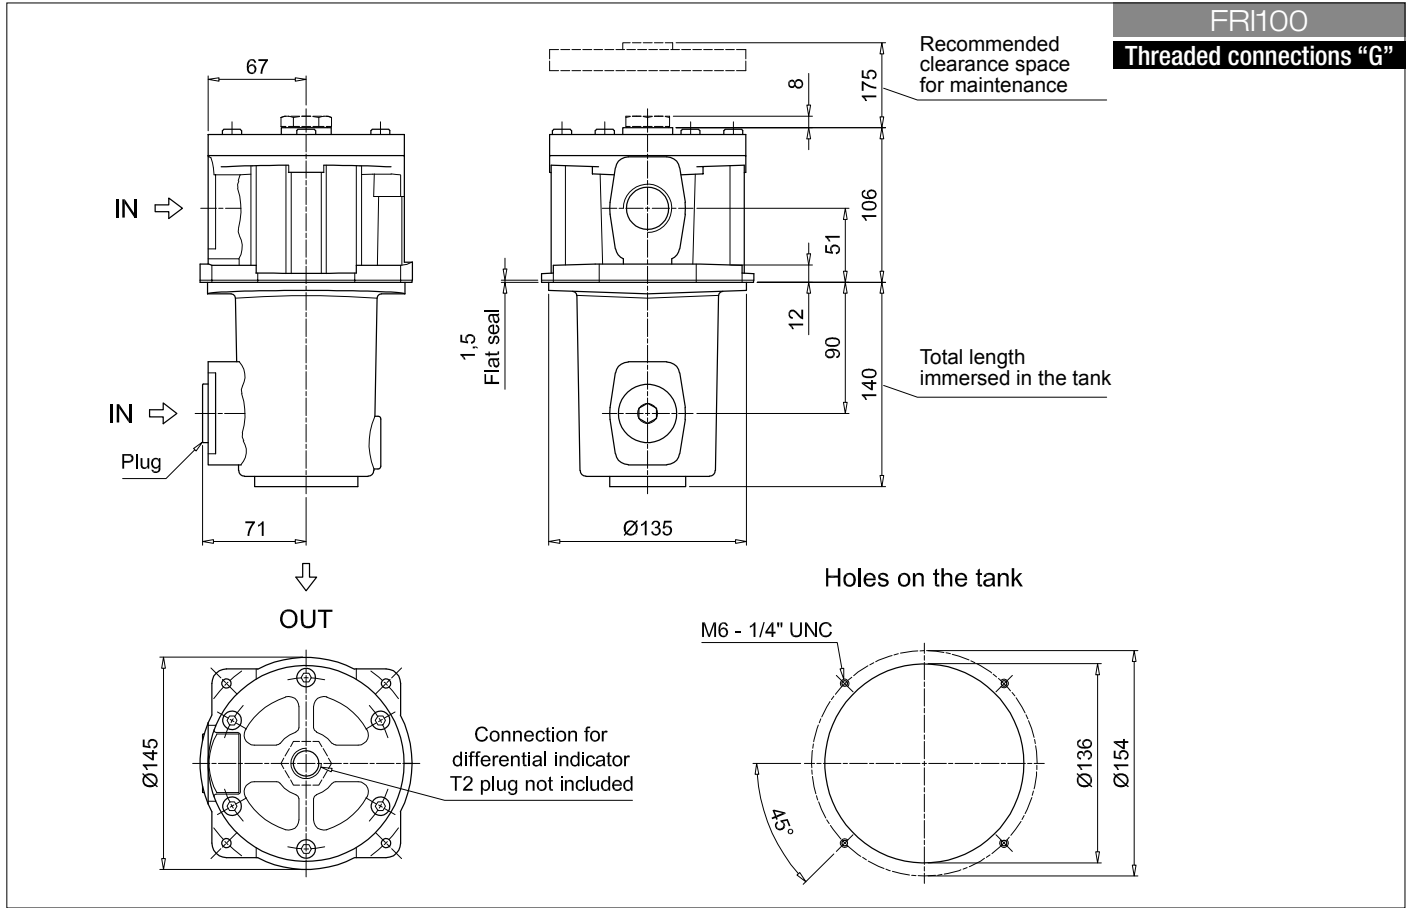

## Dimensions

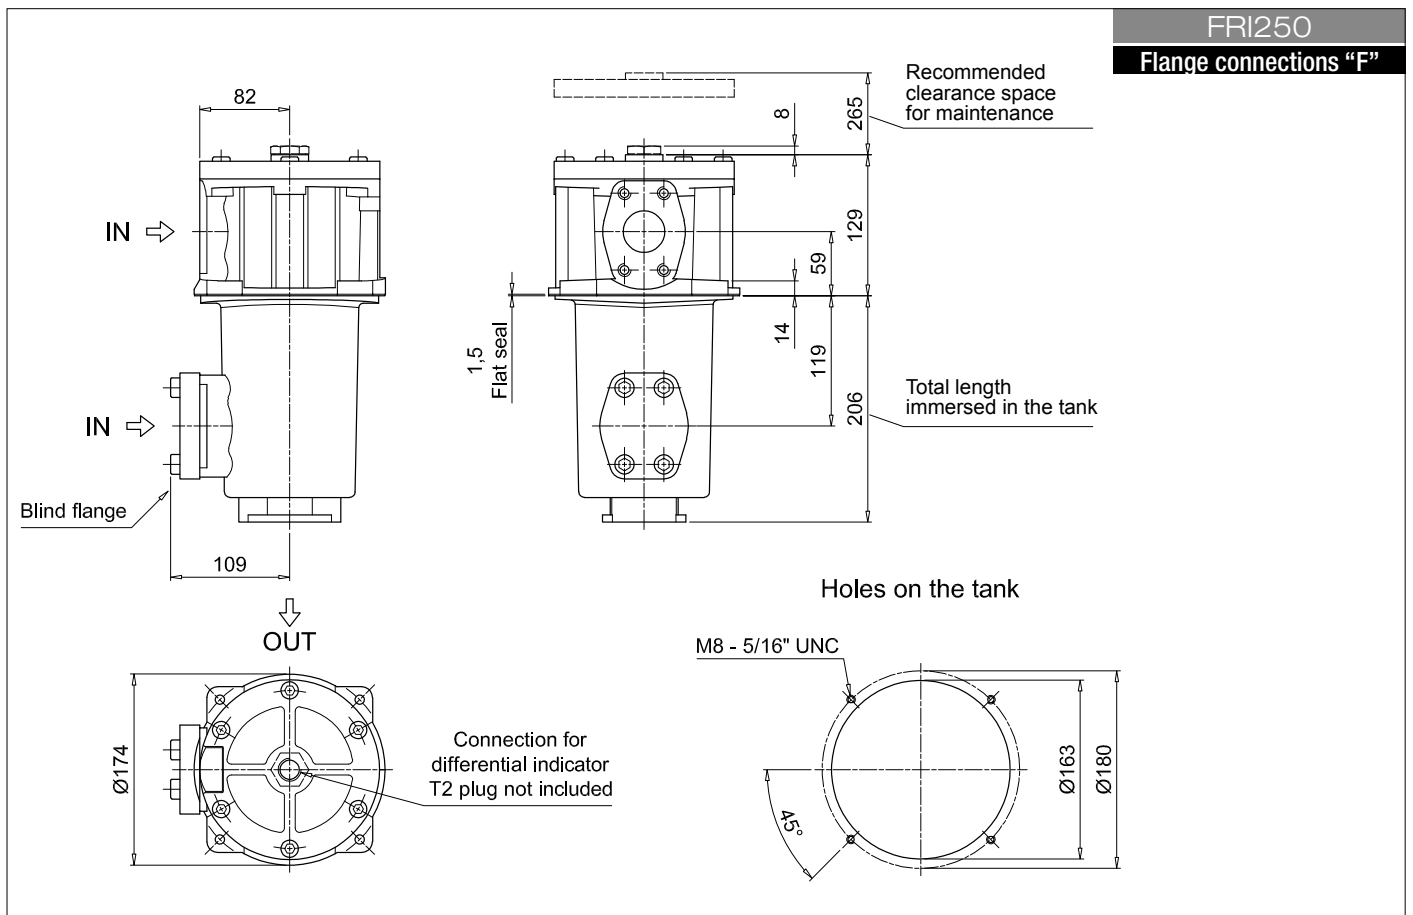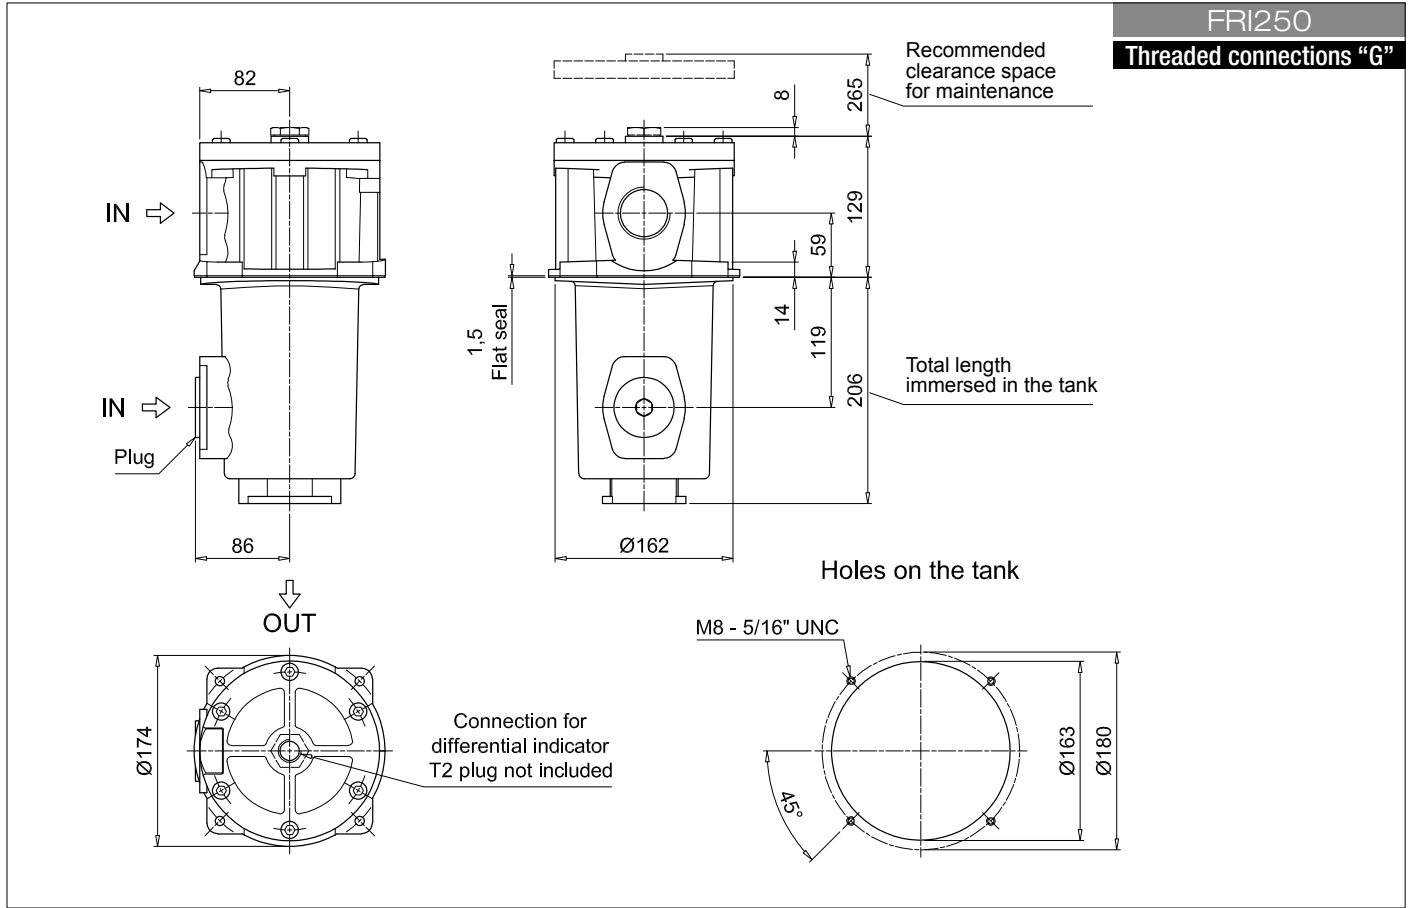

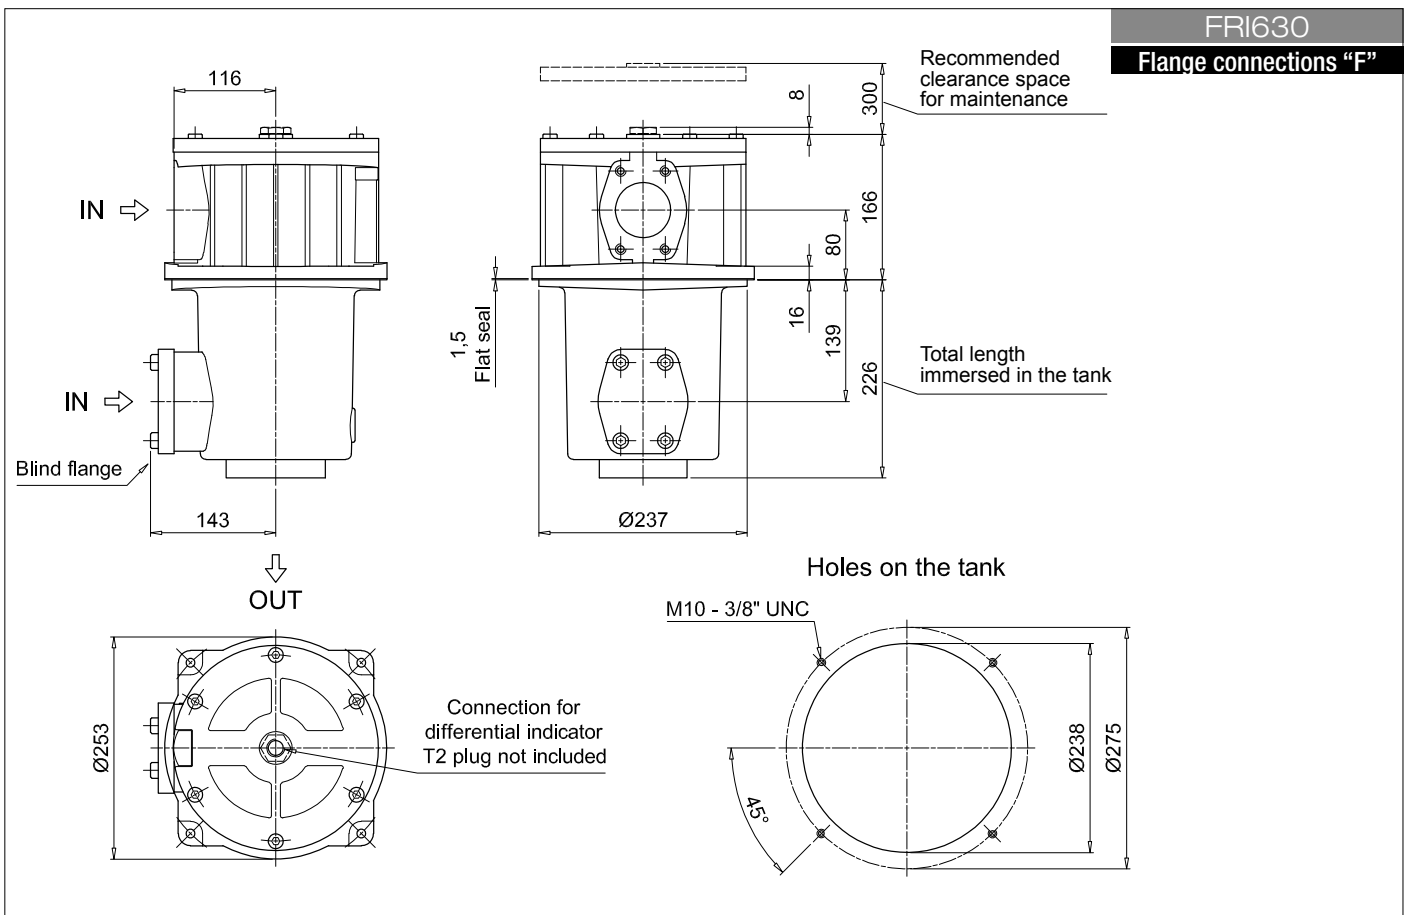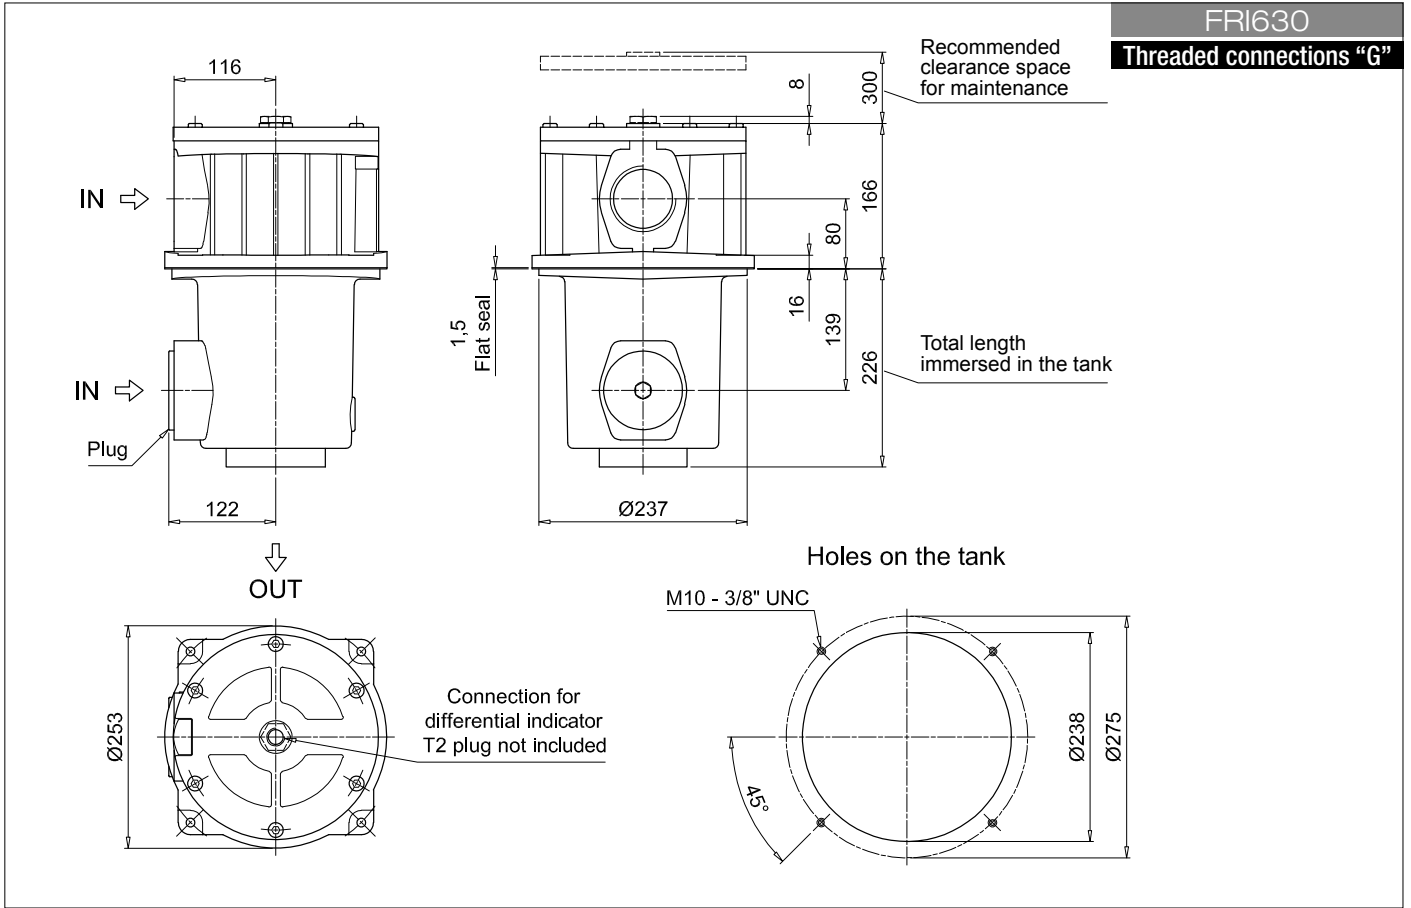

## Designation & Ordering code

### COMPLETE FILTER

<b>Series and size</b>	Configuration example 1: <b>FRI255</b> <b>S</b> <b>W</b> <b>F2</b> <b>M25</b> <b>N</b> <b>P01</b>						
<b>FRI255</b>	Configuration example 2: <b>FRI850</b> <b>B</b> <b>A</b> <b>G1</b> <b>A25</b> <b>N</b> <b>P01</b>						
<b>FRI850</b>							
<b>Bypass valve</b>							
<b>B</b> With bypass							
<b>S</b> Without bypass							
<b>Seals and treatments</b>	Filtration rating						
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>				
<b>A</b> NBR	•	•	•				
<b>V</b> FPM	•	•	•				
<b>W</b> NBR head anodized	•	•		filter element compatible with fluids HFA-HFB-HFC			
<b>Z</b> FPM head anodized	•	•					
<b>Connections for FRI255</b>	<b>Connections for FRI850</b>						
<b>G1</b> G1 1/2"	<b>F1</b> 3 1/2" SAE 3000 psi/M						
<b>G2</b> 1 1/2" NPT	<b>F2</b> 3 1/2" SAE 3000 psi/UNC						
<b>G3</b> SAE 24 - 1 7/8" - 12 UN							
<b>G4</b> G1 1/4"							
<b>G5</b> 1 1/4" NPT							
<b>G6</b> SAE 20 - 1 5/8" - 12 UN							
<b>F1</b> 1 1/2" SAE 3000 psi/M							
<b>F2</b> 1 1/2" SAE 3000 psi/UNC							
<b>Filtration rating (filter media)</b>							
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm						
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm						
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm						
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm						
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm						
	<b>Element Δp</b>			<b>Execution</b>			
	<b>N</b> 10 bar			<b>P01</b> MP Filtri standard			
				<b>Pxx</b> Customized			

### FILTER ELEMENT

<b>Element series and size</b>	Configuration example 1: <b>CU250</b> <b>M25</b> <b>W</b> <b>P01</b>			
<b>CU250</b>	Configuration example 2: <b>CU850</b> <b>A25</b> <b>N</b> <b>P01</b>			
<b>CU850</b>				
<b>Filtration rating (filter media)</b>				
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm			
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm			
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm			
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm			
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm			
<b>Seals and treatments</b>	Filtration rating			
	<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>	
<b>N</b> NBR	•	•	•	
<b>V</b> FPM	•	•	•	
<b>W</b> NBR	•	•		filter element compatible with fluids HFA-HFB-HFC
<b>Z</b> FPM	•	•		
	<b>Execution</b>			
	<b>P01</b> MP Filtri standard			
	<b>Pxx</b> Customized			


### FRI255 ACCESSORIES

<b>Indicators</b>	page		page
<b>BVA</b> Axial pressure gauge	218	<b>BEA</b> Electrical pressure indicator	221
<b>BVR</b> Radial pressure gauge	218-219	<b>BEM</b> Electrical pressure indicator	221
<b>BVP</b> Visual pressure indicator with automatic reset	219-220	<b>BLA</b> Electrical / visual pressure indicator	221
<b>BVQ</b> Visual pressure indicator with manual reset	220		


### FRI850 ACCESSORIES

<b>Indicators</b>	page		page
<b>DEA</b> Electrical differential indicator	218	<b>DTA</b> Electronic differential indicator	221
<b>DEM</b> Electrical differential indicator	218-219	<b>DVA</b> Visual differential indicator	221
<b>DLA</b> Electrical / visual differential indicator	219-220	<b>DVM</b> Visual differential indicator	221
<b>DLE</b> Electrical / visual differential indicator	220		
<b>Additional features</b>	page		
<b>T2</b> Plug	222		

FRI255

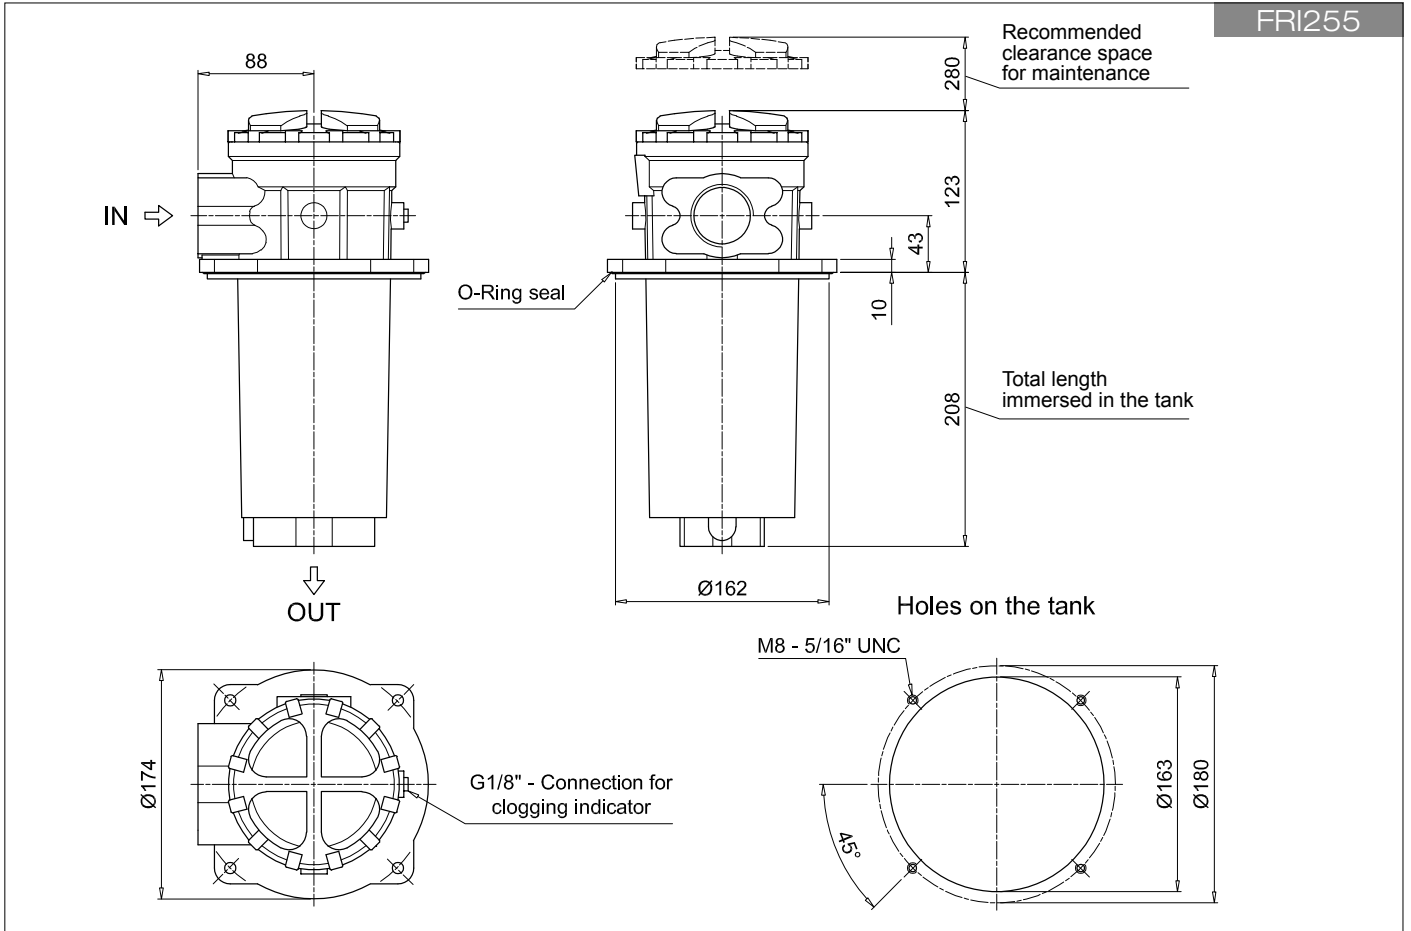


FRI850

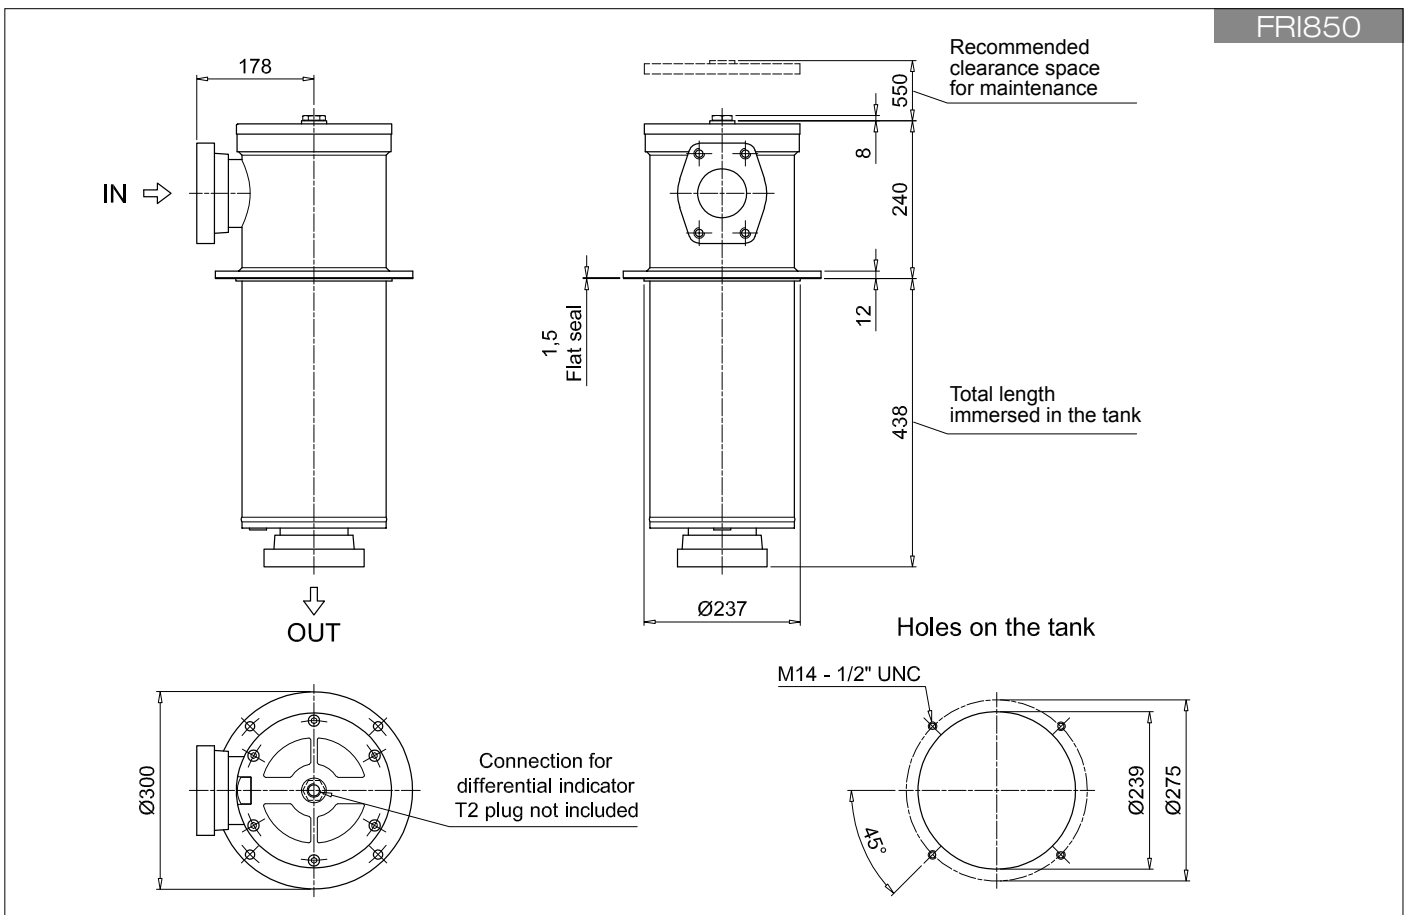


Order number for spare parts

## FRI 025 - 040

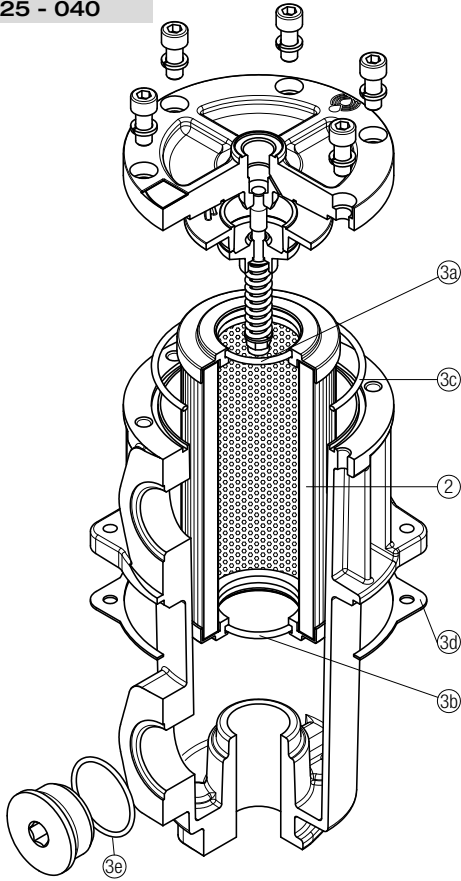


Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
	<b>2</b>	<b>3</b> (3a ÷ 3e)	
Filter series	Filter element	Seal Kit code number	
	See order table	NBR	FPM
<b>FRI 025</b>		02050213	02050220
<b>FRI 040</b>		02050214	02050221

## FRI 100 - 250 - 630

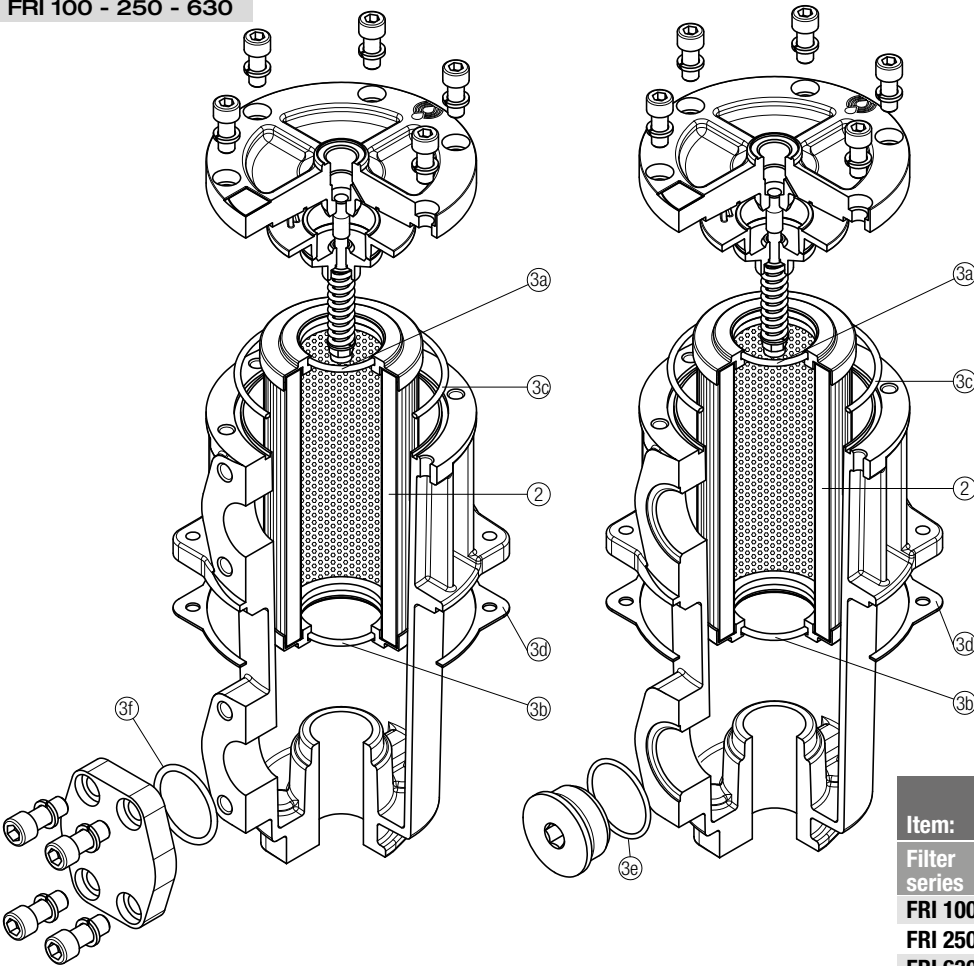


Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
	<b>2</b>	<b>3</b> (3a ÷ 3f)	
Filter series	Filter element	Seal Kit code number	
	See order table	NBR	FPM
<b>FRI 100</b>		02050215	02050222
<b>FRI 250</b>		02050216	02050223
<b>FRI 630</b>		02050217	02050224

FRI 255

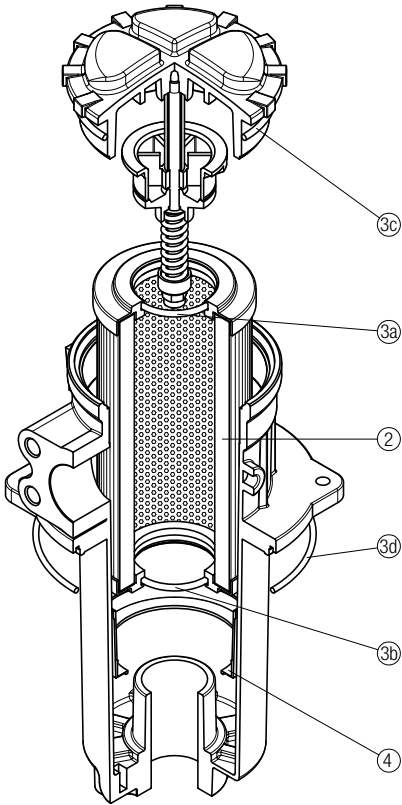

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	Q.ty: 1 pc.
	<b>2</b>	<b>3</b> (3a ÷ 3d)	<b>4</b>
Filter series	Filter element	Seal Kit code number	
	See order table	NBR	FPM
<b>FRI 255</b>		02050013	02050014
		Contamination retainer binder	
		01060301	

FRI 850

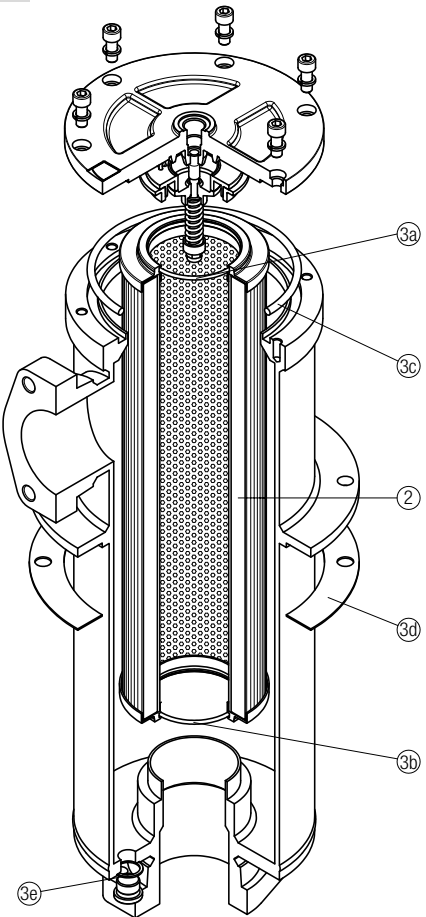

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.
	<b>2</b>	<b>3</b> (3a ÷ 3e)
Filter series	Filter element	Seal Kit code number
	See order table	NBR
<b>FRI 850</b>		02050218
		FPM
		02050225





# RF2 series

Maximum pressure up to 20 bar - Flow rate up to 350 l/min



## Technical data

**Return filter** Maximum pressure up to 20 bar - Flow rate up to 350 l/min

### Filter housing materials

- Filter body: Aluminium
- Cover: Polyamide, GF reinforced
- Valve: Polyamide, GF reinforced - Steel
- Anti-Emptying valve: Steel

### Seals

- Standard NBR series A
- Optional FPM series V

### Pressure

Working pressure: 2 MPa (20 bar)

### Temperature

From -25 °C to +110 °C

### Bypass valve

Opening pressure 175 kPa (1.75 bar)

### Note

RF2 250-350 filters mounting, see the drawings on page 211 and following.

### Δp element type


- Microfibre filter elements - series CU: 10 bar
- Fluid flow through the filter element from OUT to IN.

## Weights [kg] and volumes [dm<sup>3</sup>]

	Weights [kg]		Volumes [dm <sup>3</sup> ]	
	Lenght	1	Lenght	1
<b>RF2 250</b>		2.6		2.0
<b>RF2 350</b>		2.8		2.0

## Hydraulic symbols


Style  
RF2 250-350

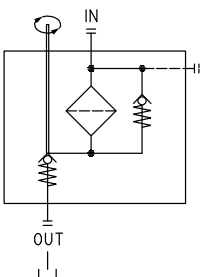


The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.

**$\Delta p$  varies proportionally with density.**

Filter housings  $\Delta p$  pressure drop

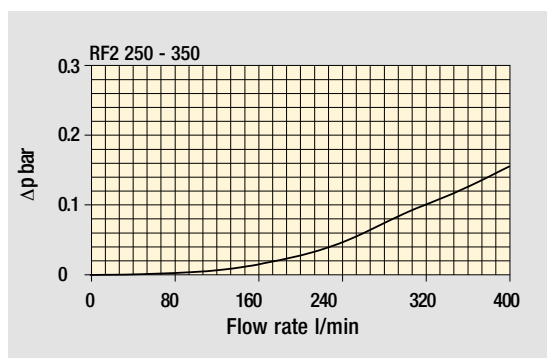

Bypass valve pressure drop

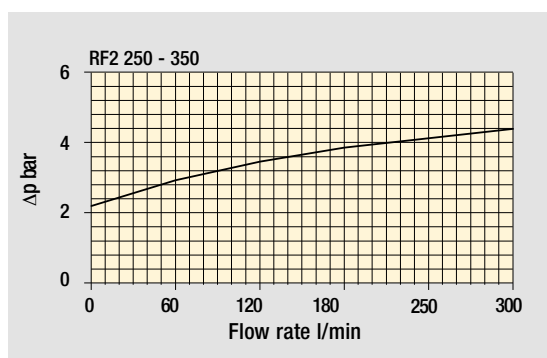

# RF2 RF2250 - RF2350



## Designation & Ordering code

### COMPLETE FILTER


<b>Series and size</b>				Configuration example 1: <b>RF2250</b> <b>W</b> <b>F2</b> <b>E</b> <b>M25</b> <b>P01</b>					
<b>RF2250</b>				Configuration example 2: <b>RF2350</b> <b>A</b> <b>G1</b> <b>B</b> <b>A25</b> <b>P01</b>					
<b>RF2350</b>									
				Filtration rating					
<b>Seals and treatments</b>				<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>			
<b>A</b>	NBR			•	•	•			
<b>V</b>	FPM			•	•	•			
<b>W</b>	NBR compatible with fluids HFA-HFB-HFC			•	•				
<b>Z</b>	FPM compatible with fluids HFA-HFB-HFC			•	•				
<b>Connections</b>				<b>Aux (only RF2350)</b>		<b>Mxx</b>	<b>Pxx</b>		
<b>G1</b>	G1 1/2"		G1"	•	•				
<b>G2</b>	1 1/2" NPT		-	•					
<b>G3</b>	SAE 24 - 1 7/8" - 12 UN		SAE 16 - 1 5/16" - 12 UN	•	•				
<b>G4</b>	G1 1/4"		-	•					
<b>G5</b>	1 1/4" NPT		-	•					
<b>G6</b>	SAE 20 - 1 5/8" - 12 UN		-	•					
<b>G7</b>	G1"		-	•					
<b>G8</b>	1" NPT		-	•					
<b>G9</b>	SAE 16 - 1 5/16" - 12 UN		-	•					
<b>F1</b>	1 1/2" SAE 3000 psi/M		-	•					
<b>F2</b>	1 1/2" SAE 3000 psi/UNC		-	•					
<b>Bypass valve</b>									
<b>B</b>	1.75 bar								
<b>E</b>	3 bar								
<b>Filtration rating (filter media)</b>									
<b>A03</b>	Inorganic microfiber	3 µm	<b>M25</b>	Wire mesh	25 µm				
<b>A06</b>	Inorganic microfiber	6 µm	<b>M60</b>	Wire mesh	60 µm				
<b>A10</b>	Inorganic microfiber	10 µm	<b>M90</b>	Wire mesh	90 µm				
<b>A16</b>	Inorganic microfiber	16 µm	<b>P10</b>	Resin impregnated paper	10 µm				
<b>A25</b>	Inorganic microfiber	25 µm	<b>P25</b>	Resin impregnated paper	25 µm				
				<b>Execution</b>					
				<b>P01</b> MP Filtri standard					
				<b>Pxx</b> Customized					

### FILTER ELEMENT


<b>Element series and size</b>				Configuration example 1: <b>CU250</b> <b>M25</b> <b>W</b> <b>P01</b>					
<b>CU250</b>				Configuration example 2: <b>CU250</b> <b>A25</b> <b>N</b> <b>P01</b>					
<b>Filtration rating (filter media)</b>									
<b>A03</b>	Inorganic microfiber	3 µm	<b>M25</b>	Wire mesh	25 µm				
<b>A06</b>	Inorganic microfiber	6 µm	<b>M60</b>	Wire mesh	60 µm				
<b>A10</b>	Inorganic microfiber	10 µm	<b>M90</b>	Wire mesh	90 µm				
<b>A16</b>	Inorganic microfiber	16 µm	<b>P10</b>	Resin impregnated paper	10 µm				
<b>A25</b>	Inorganic microfiber	25 µm	<b>P25</b>	Resin impregnated paper	25 µm				
<b>Seals and treatments</b>				Filtration rating					
				<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>			
<b>N</b>	NBR			•	•	•			
<b>V</b>	FPM			•	•	•			
<b>W</b>	NBR head anodized	filter element compatible		•	•				
<b>Z</b>	FPM head anodized	with fluids HFA-HFB-HFC		•	•				
				<b>Execution</b>					
				<b>P01</b> MP Filtri standard					
				<b>Pxx</b> Customized					

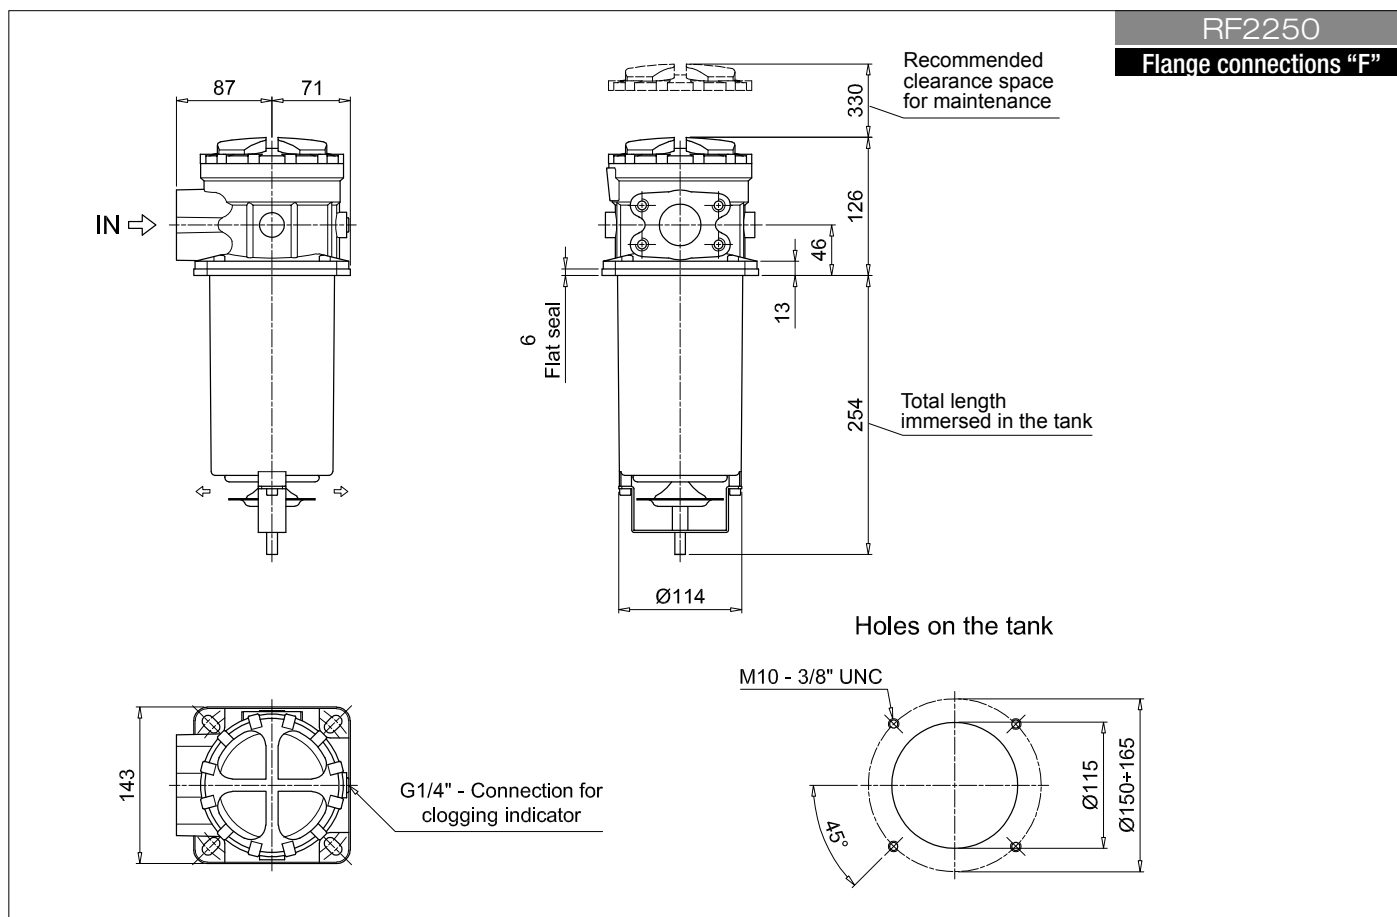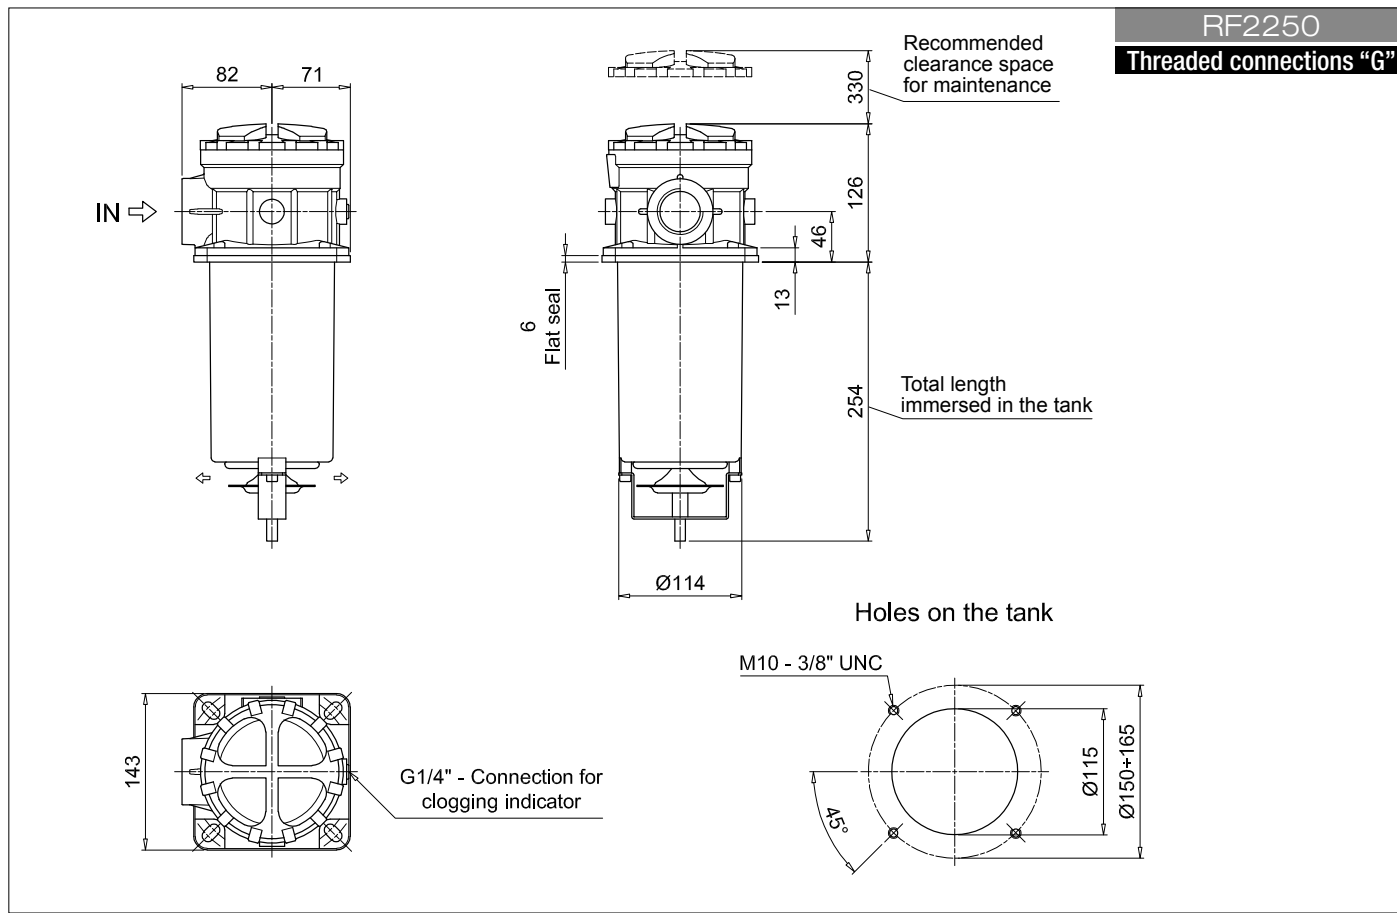

## Dimensions

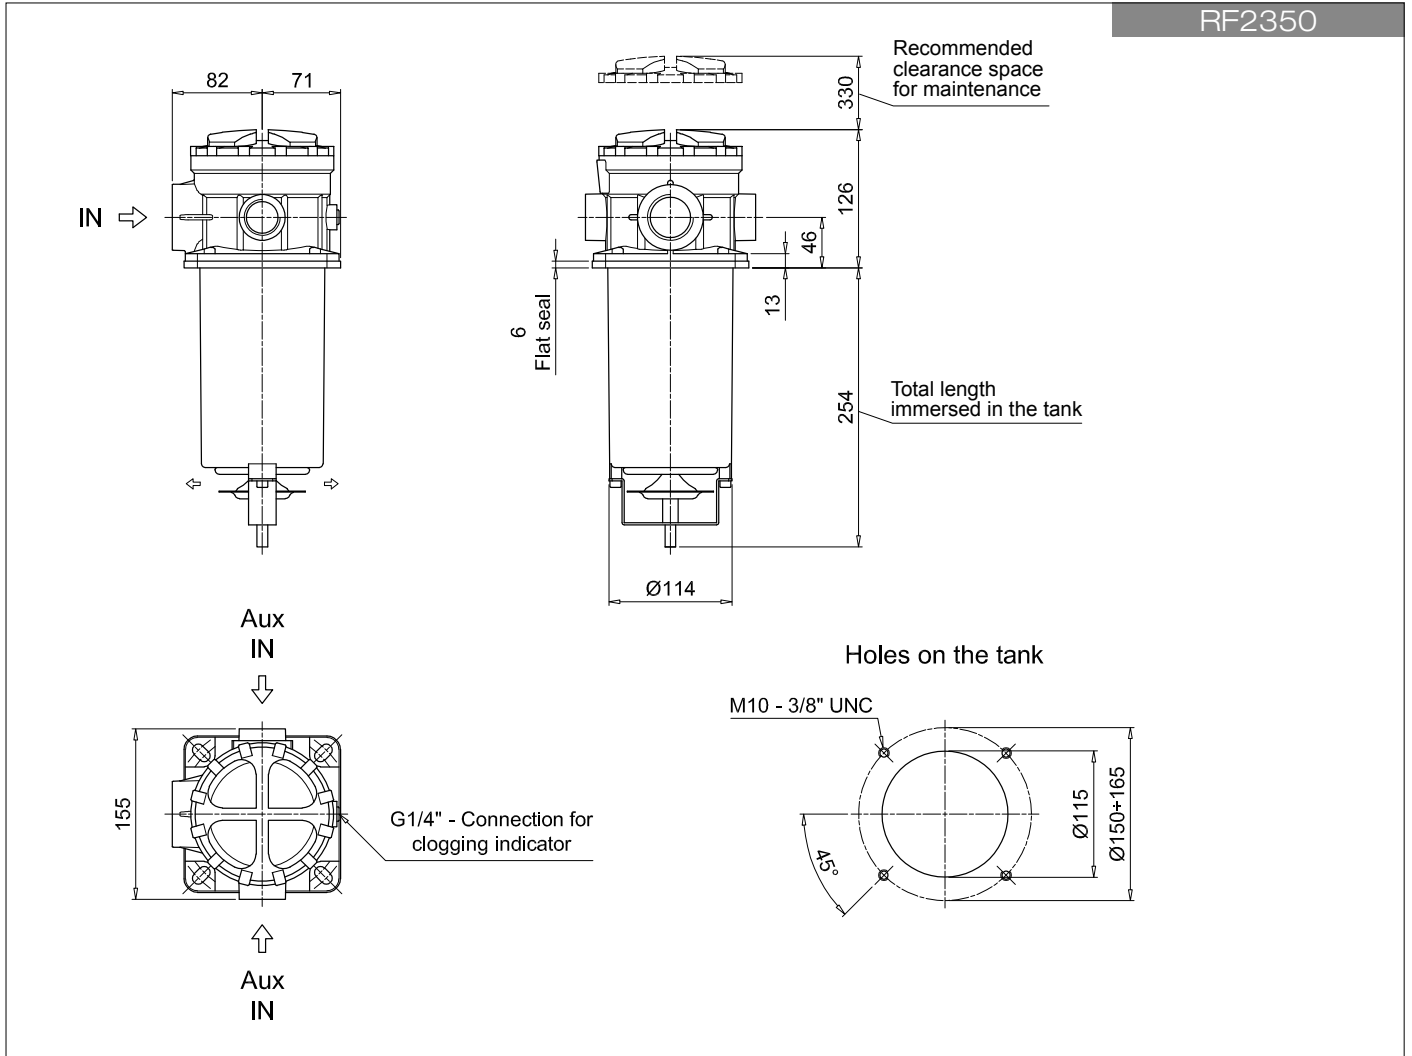

RF2 250 - 350

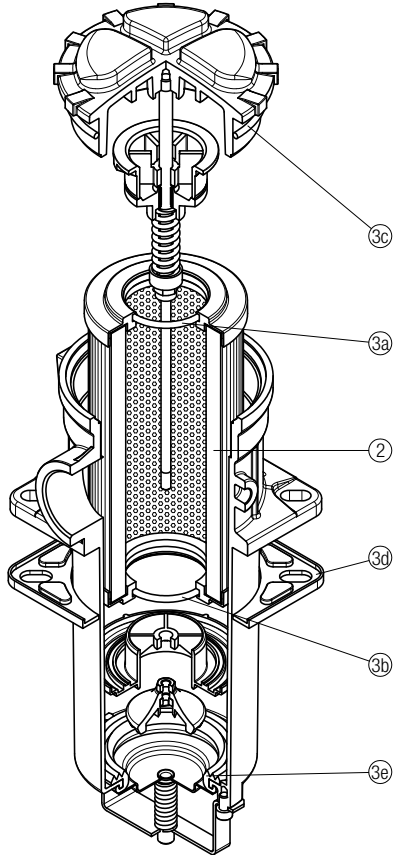

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.	
	<b>2</b>	<b>3</b> (3a ÷ 3e)	
Filter series	Filter element	Seal Kit code number	
		NBR	FPM
<b>RF2 250</b>	See order table	02050586	02050587
<b>RF2 350</b>			

# Clogging indicators

Barometric indicators  
Differential indicators

## Introduction

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:


- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals.

## Suitable indicator types


### BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element. They measure the pressure upstream of the filter element. Standard items are produced with R 1/8" EN 10226 connection.

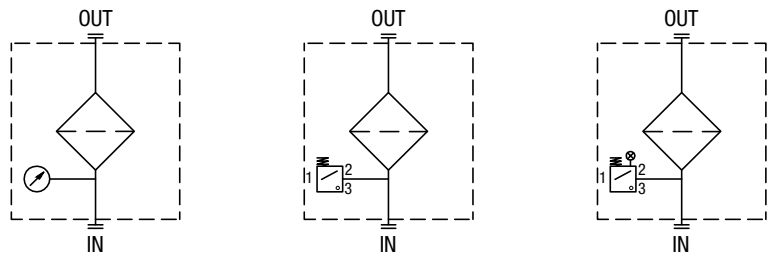

### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element. They measure the pressure upstream and downstream of the filter element (differential pressure). Standard items are produced with special connection G 1/2" size. Also available in Stainless Steel models.

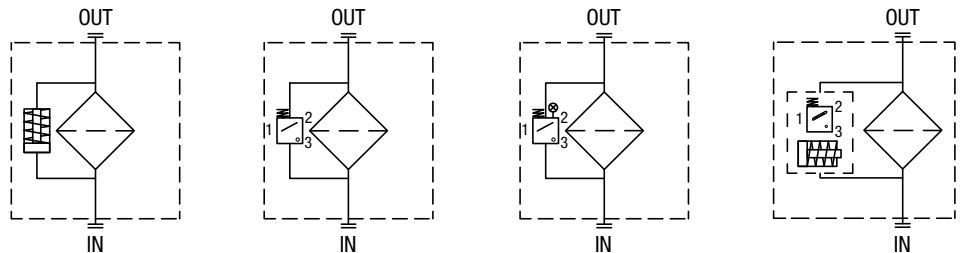

## Quick reference guide

Filter series	Visual indicator	Electrical indicator	Electrical / Visual indicator	Electronic indicator
MPFX-MPTX-MPF-MPT with bypass 1.75 bar MPH with bypass 1.75 bar	BVA14P01 BVR14P01 BVP20HP01 BVQ20HP01	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01	
MPFX-MPTX-MPF-MPT with bypass 3 bar MPH with bypass 2.5 bar FRI 255	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA20HA50P01 BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01	
FRI 025 - 040 - 100 - 250 - 630 - 850	DVA20xP01 DVM20xP01	DEA20xA50P01 DEM20xAxxP01	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01	DTA20xF70P01



BEA*50	
<b>Electrical Pressure Indicator</b>	
Settings	Ordering code
1.5 bar ±10%	BE A 15 H A 50 P01
2 bar ±10%	BE A 20 H A 50 P01

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**

- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529

**Electrical data**

- Electrical connection: EN 175301-803
- Resistive load: 5 A / 14 Vdc, 4 A / 30 Vdc, 5 A / 125 Vac, 4 A / 250 Vac

- Available Atex product: II 1GD Ex ia IIC Tx Ex ia IIIC Tx°C X

- CE certification

BEM*41	
<b>Electrical Pressure Indicator</b>	
Settings	Ordering code
1.5 bar ±10%	BE M 15 H A 41 P01
2 bar ±10%	BE M 20 H A 41 P01

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**

- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP67 according to EN 60529

**Electrical data**

- Electrical connection: Four-core cable
- Resistive load: 5 A / 14 Vdc, 4 A / 30 Vdc, 5 A / 125 Vac, 4 A / 250 Vac

- CE certification

On request this indicator can be provided with main connectors in use for wirings.

BL*51 - BL*52 - BL*53	
<b>Electrical/Visual Pressure Indicator</b>	
Settings	Ordering code
1.5 bar ±10%	BL A 15 H A xx P01
2 bar ±10%	BL A 20 H A xx P01

**Hydraulic symbol**

**Electrical symbol**

**Materials**

- Body: Brass
- Base: Transparent Nylon
- Contacts: Silver
- Seal: HNBR

**Technical data**



- Max working pressure: 40 bar
- Proof pressure: 60 bar
- Working temperature: From -25 °C to +80 °C
- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943
- Degree of protection: IP65 according to EN 60529


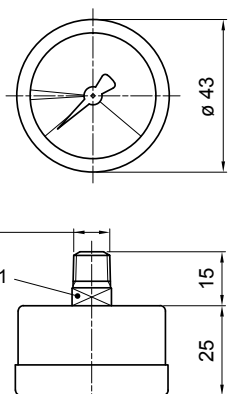
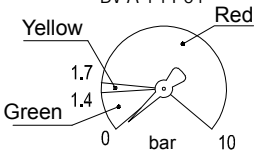
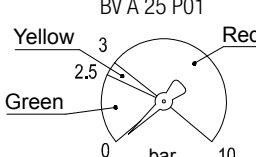
**Electrical data**


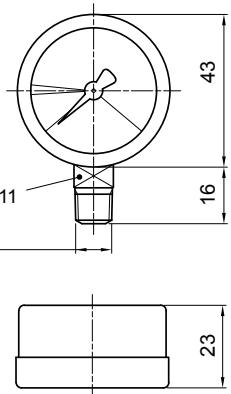
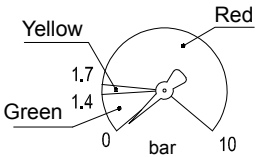
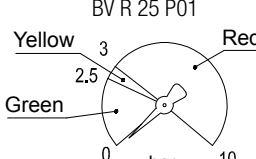
- Electrical connection: EN 175301-803
- Type: 51, 52, 53
- Lamps: 24 Vdc, 110 Vdc, 230 Vac
- Resistive load: 0.8 A / 24 Vdc, 0.2 A / 110 Vdc, 4 A / 230 Vac






# BAROMETRIC INDICATORS

## Dimensions

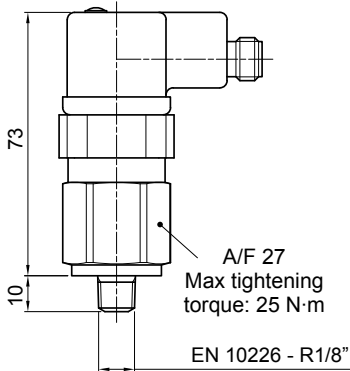BL*71		<b>Hydraulic symbol</b> 	<b>Materials</b> - Body: Brass - Base: Black Nylon - Contacts: Silver - Seal: HNBR						
<b>Electrical/Visual Pressure Indicator</b> <table border="1"> <thead> <tr> <th>Settings</th> <th>Ordering code</th> </tr> </thead> <tbody> <tr> <td>1.5 bar ±10%</td> <td>BLA 15 HA 71 P01</td> </tr> <tr> <td>2 bar ±10%</td> <td>BLA 20 HA 71 P01</td> </tr> </tbody> </table>				Settings	Ordering code	1.5 bar ±10%	BLA 15 HA 71 P01	2 bar ±10%	BLA 20 HA 71 P01
Settings	Ordering code								
1.5 bar ±10%	BLA 15 HA 71 P01								
2 bar ±10%	BLA 20 HA 71 P01								
		<b>Electrical data</b> - Electrical connection: IEC 61076-2-101 D (M12) - Lamps: 24 Vdc - Resistive load: 0.4 A / 24 Vdc							

BVA		<b>Hydraulic symbol</b> 	<b>Materials</b> - Case: Painted Steel - Window: Transparent plastic - Dial: Painted Steel - Pointer: Painted Aluminium - Pressure connection: Brass - Pressure element: Bourdon tube Cu-alloy soft soldered					
<b>Axial Pressure Gauge</b> <table border="1"> <thead> <tr> <th>Settings</th> <th>Ordering code</th> </tr> </thead> <tbody> <tr> <td>1.4 bar ±10%</td> <td>BVA 14 P01</td> </tr> <tr> <td>2.5 bar ±10%</td> <td>BVA 25 P01</td> </tr> </tbody> </table>				Settings	Ordering code	1.4 bar ±10%	BVA 14 P01	2.5 bar ±10%
Settings	Ordering code							
1.4 bar ±10%	BVA 14 P01							
2.5 bar ±10%	BVA 25 P01							
		<b>Dial scale</b> BVA 14 P01  BVA 25 P01 						

BVR		<b>Hydraulic symbol</b> 	<b>Materials</b> - Case: Painted Steel - Window: Transparent plastic - Dial: Painted Steel - Pointer: Painted Aluminium - Pressure connection: Brass - Pressure element: Bourdon tube Cu-alloy soft soldered					
<b>Radial Pressure Gauge</b> <table border="1"> <thead> <tr> <th>Settings</th> <th>Ordering code</th> </tr> </thead> <tbody> <tr> <td>1.4 bar ±10%</td> <td>BV R 14 P01</td> </tr> <tr> <td>2.5 bar ±10%</td> <td>BV R 25 P01</td> </tr> </tbody> </table>				Settings	Ordering code	1.4 bar ±10%	BV R 14 P01	2.5 bar ±10%
Settings	Ordering code							
1.4 bar ±10%	BV R 14 P01							
2.5 bar ±10%	BV R 25 P01							
		<b>Dial scale</b> BV R 14 P01  BV R 25 P01 						

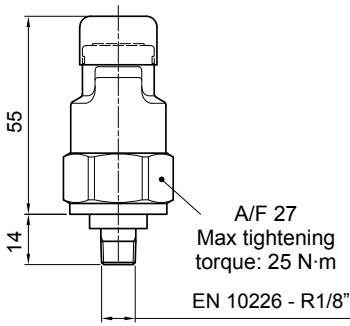BVP - BVQ		Hydraulic symbol	Materials	
Visual Pressure Indicator				
Setting	Ordering code			
1.5 bar ±10%	BV P 15 H P01 BV Q 15 H P01		<b>Technical data</b> - Reset: BVP - Automatic reset BVQ - Manual reset - Max working pressure: 10 bar - Proof pressure: 15 bar - Working temperature: From -25 °C to +80 °C - Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree of protection: IP45 according to EN 60529	
2 bar ±10%	BV P 20 H P01 BV Q 20 H P01			
		Signals		
		 Absence of pressure (no indicator)	 Presence of pressure (green button rises gradually)	 Clogged filter element (red button risen)

DESIGNATION & ORDERING CODE																
<b>Series</b>	Configuration example 1: <table border="1"><tr><td>BE</td><td>M</td><td>15</td><td>H</td><td>A</td><td>41</td><td>P01</td></tr></table>									BE	M	15	H	A	41	P01
BE	M	15	H	A	41	P01										
<b>BE</b> Electrical pressure indicator	Configuration example 2: <table border="1"><tr><td>BL</td><td>A</td><td>20</td><td>H</td><td>A</td><td>71</td><td>P01</td></tr></table>									BL	A	20	H	A	71	P01
BL	A	20	H	A	71	P01										
<b>BL</b> Electrical/Visual pressure indicator	Configuration example 3: <table border="1"><tr><td>BV</td><td>R</td><td>14</td><td></td><td></td><td></td><td>P01</td></tr></table>									BV	R	14				P01
BV	R	14				P01										
<b>BV</b> Visual pressure indicator	Configuration example 4: <table border="1"><tr><td>BV</td><td>P</td><td>20</td><td>H</td><td></td><td></td><td>P01</td></tr></table>									BV	P	20	H			P01
BV	P	20	H			P01										
<b>Type</b>	BE	BL	BV													
<b>A</b> Standard type	•	•	<b>A</b>	Axial connection pressure gauge												
<b>M</b> With wired electrical connection	•		<b>R</b>	Radial connection pressure gauge												
			<b>P</b>	Visual indicator with automatic reset												
			<b>Q</b>	Visual indicator with manual reset												
<b>Pressure setting</b>	BEA-BEM	BL	BVA-BVR	BVP-BVQ												
<b>14</b> 1.4 bar			•													
<b>15</b> 1.5 bar	•	•		•												
<b>20</b> 2 bar	•	•		•												
<b>25</b> 2.5 bar			•													
<b>Seals</b>	BE	BL	BVA-BVR	BVP-BVQ												
<b>H</b> HNBR	•	•		•												
<b>Thermostat</b>	BE	VL	BV													
<b>A</b> Without	•	•														
<b>Electrical connections</b>	BEA	BEM	BL	BV												
<b>10</b> Connection AMP Superseal series 1.5																
<b>30</b> Connection Deutsch DT-04-2-P																
<b>41</b> Connection via four-core cable																
<b>50</b> Connection EN 175301-803																
<b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc																
<b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc																
<b>53</b> Connection EN 175301-803, transparent base with lamps 230 Vdc																
<b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc																
	<b>Option</b>															
	<b>P01</b> MP Filtri standard															
	<b>Pxx</b> Customized															

# DIFFERENTIAL INDICATORS

## Dimensions

DEA*50	
<b>Electrical Differential Indicator</b>	
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DE A 20 x A 50 P01
<p><b>Hydraulic symbol</b></p>	
<p><b>Electrical symbol</b></p>	
<p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>	
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653</li> </ul>	
<p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: EN 175301-803</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> </ul>	

DEM*10	
<b>Electrical Differential Indicator</b>	
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DE M 20 xx 10 P01
<p><b>Hydraulic symbol</b></p>	
<p><b>Electrical symbol</b></p>	
<p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>	
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP66 according to EN 60529</li> </ul>	
<p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Superseal series 1.5</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> <li>- Switching type: Normally open contacts (NC on request)</li> <li>- Thermal lockout: Normally open up to 30 °C (option "F")</li> </ul>	


DEM*20	
<b>Electrical Differential Indicator</b>	
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DEM20xx20P01
<p><b>Hydraulic symbol</b></p>	
<p><b>Electrical symbol</b></p>	
<p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Base: Black Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>	
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP66 according to EN 60529</li> </ul>	
<p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: AMP Time junior</li> <li>- Resistive load: 0.2 A / 115 Vdc</li> <li>- Switching type: Normally open contacts (NC on request)</li> <li>- Thermal lockout: Normally open up to 30 °C (option "F")</li> </ul>	

**DEM\*30**  
**Electrical Differential Indicator**


Settings	Ordering code
2 bar ±10%	DE M 20 xx 30 P01

75  
A/F 28  
Max tightening torque: 65 N·m

### Hydraulic symbol



### Electrical symbol



### Materials

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

### Technical data

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oil, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529

### Electrical data


- Electrical connection: Deutsch DT-04-2-P
- Resistive load: 0.2 A / 115 Vdc
- Switching type: Normally open contacts (NC on request)
- Thermal lockout: Normally open up to 30 °C (option "F")

**DEM\*35**  
**Electrical Differential Indicator**


Settings	Ordering code
2 bar ±10%	DE M 20 xx 35 P01

min. 60  
30  
A/F 28  
Max tightening torque: 65 N·m  
flexible cable: 240 to "A"

### Hydraulic symbol



### Electrical symbol



### Materials

- Body: Brass
- Base: Black Nylon
- Contacts: Silver
- Seal: HNBR - FPM

### Technical data

- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oil, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529

### Electrical data


- Electrical connection: Deutsch DT-04-3-P
- Resistive load: 0.2 A / 115 Vdc
- Switching type: SPDT contact
- Thermal lockout: Normally open up to 30 °C (option "F")

**DLA\*51 - DLA\*52**  
**Electrical/Visual Differential Indicator**


Settings	Ordering code
2 bar ±10%	DL A 20 x A xx P01

53  
A/F 30  
Max tightening torque: 65 N·m

### Hydraulic symbol



### Electrical symbol



### Materials

- Body: Brass
- Base: Transparent Nylon
- Contacts: Silver
- Seal: HNBR - FPM

### Technical data



- Max working pressure: 420 bar
- Proof pressure: 630 bar
- Burst pressure: 1260 bar
- Working temperature: From -25 °C to +110 °C
- Compatibility with fluids: Mineral oil, Synthetic fluids  
HFA, HFB, HFC according to ISO 2943
- Degree protection: IP66 according to EN 60529  
IP69K according to ISO 20653



### Electrical data



- Electrical connection: EN 175301-803
- Type: 51                              52
- Lamps: 24 Vdc                      110 Vdc
- Resistive load: 0.8 A / 24 Vdc      0.2 A / 110 Vdc




# DIFFERENTIAL INDICATORS



## Dimensions

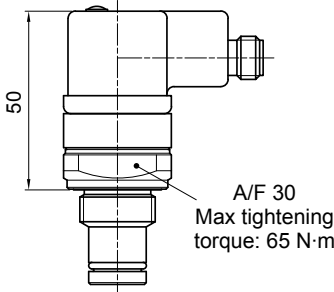

DLA*71		Hydraulic symbol	Materials
<b>Electrical/Visual Differential Indicator</b>			
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DLA 20 x A 71 P01	<b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids</li> </ul>	
		<b>Electrical symbol</b> 	<b>Electrical data</b> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Lamps: 24 Vdc</li> <li>- Resistive load: 0.4 A / 24 Vdc</li> </ul>

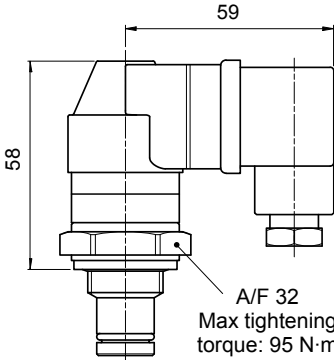DLE*A50		Hydraulic symbol	Materials
<b>Electrical/Visual Differential Indicator</b>			
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DL E 20 x A 50 P01	<b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids</li> </ul>	
		<b>Electrical symbol</b> 	<b>Electrical data</b> <ul style="list-style-type: none"> <li>- Electrical connections: EN 175301-803</li> <li>- Resistive load: 5 A / 250 Vac</li> <li>- Available the connector with lamps</li> </ul>

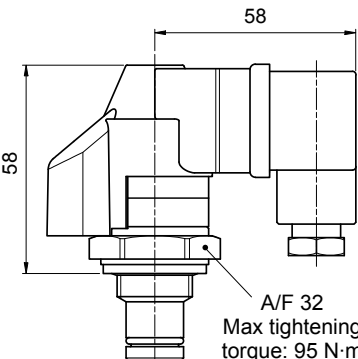DLE*F50		Hydraulic symbol	Materials
<b>Electrical/Visual Differential Indicator</b>			
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DL E 20 x F 50 P01	<b>Technical data</b> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids</li> </ul>	
		<b>Electrical symbol</b> 	<b>Electrical data</b> <ul style="list-style-type: none"> <li>- Electrical connections: EN 175301-803</li> <li>- Resistive load: 5 A / 250 Vac</li> <li>- Thermal lockout setting: +30 °C</li> </ul>

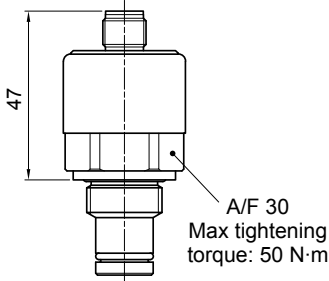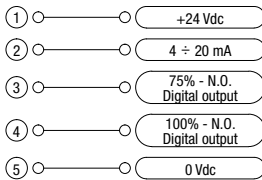DTA*70	
<b>Electronic Differential Indicator</b>	
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DT A 20 x x 70 P01
	
<p><b>Hydraulic symbol</b></p> 	
<p><b>Electrical symbol</b></p> 	
<p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>	
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP67 according to EN 60529</li> </ul>	
<p><b>Electrical data</b></p> <ul style="list-style-type: none"> <li>- Electrical connection: IEC 61076-2-101 D (M12)</li> <li>- Power supply: 24 Vdc</li> <li>- Analogue output: From 4 to 20 mA</li> <li>- Thermal lockout: 30 °C (all output signals stalled up to 30 °C)</li> </ul>	

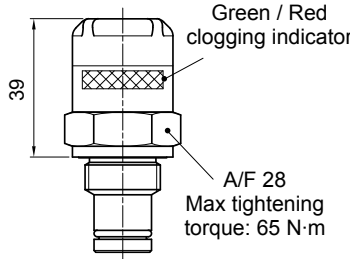
DVA	
<b>Visual Differential Indicator</b>	
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DV A 20 x P01
	
<p><b>Hydraulic symbol</b></p> 	
<p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>	
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Reset: Automatic reset</li> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul>	

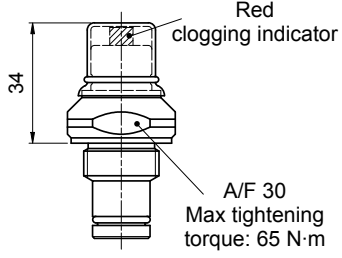DVM	
<b>Visual Differential Indicator</b>	
<b>Settings</b> 2 bar ±10%	<b>Ordering code</b> DV M 20 x P01
	
<p><b>Hydraulic symbol</b></p> 	
<p><b>Materials</b></p> <ul style="list-style-type: none"> <li>- Body: Brass</li> <li>- Internal parts: Brass - Nylon</li> <li>- Contacts: Silver</li> <li>- Seal: HNBR - FPM</li> </ul>	
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>- Reset: Manual reset</li> <li>- Max working pressure: 420 bar</li> <li>- Proof pressure: 630 bar</li> <li>- Burst pressure: 1260 bar</li> <li>- Working temperature: From -25 °C to +110 °C</li> <li>- Compatibility with fluids: Mineral oil, Synthetic fluids HFA, HFB, HFC according to ISO 2943</li> <li>- Degree protection: IP65 according to EN 60529</li> </ul>	

# DIFFERENTIAL INDICATORS

## Dimensions

T2 Indicator plug	
Seal	Ordering code
HNBR	T2 H
FPM	T2 V

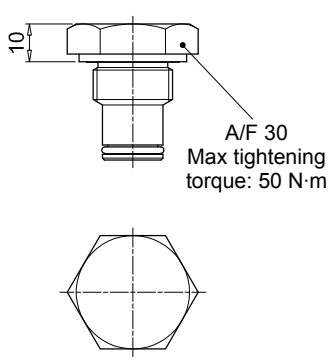

**Materials**

- Body: Phosphatized steel
- Seal: HNBR / FPM

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATORS

Series	Configuration example 1:						
<b>DE</b> Electrical differential indicator	DE	M	20	H	F	50	P01
<b>DL</b> Electrical/Visual differential indicator	DL	E	20	V	A	71	P01
<b>DT</b> Electronic differential indicator	DT	A	20	H	F	70	P01
<b>DV</b> Visual differential indicator	DV	M	20	V			P01

Type	DE	DL	DT	DV
<b>A</b> Standard type	•	•	•	<b>A</b> With automatic reset
<b>M</b> With wired electrical connection	•			<b>M</b> With manual reset
<b>E</b> For high power supply		•		

Pressure setting	DEA	DEM	DLA	DLE	DT	DV
<b>20</b> 2 bar	•	•	•	•	•	•

Seals	DEA	DEM	DLA	DLE	DT	DV
<b>H</b> HNBR	•	•	•	•	•	•
<b>V</b> FPM						

Thermostat	DEA	DEM	DLA	DLE	DT	DV
<b>A</b> Without	•	•	•	•	•	•
<b>F</b> With thermostat				•	•	

Electrical connections	DEA	DEM	DLA	DLE	DT	DV
<b>10</b> Connection AMP Superseal series 1.5		•				
<b>20</b> Connection AMP Timer Junior		•				
<b>30</b> Connection Deutsch DT-04-2-P		•				
<b>35</b> Connection Deutsch DT-04-3-P		•				
<b>50</b> Connection EN 175301-803	•			•		
<b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc			•			
<b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc			•			
<b>70</b> Connection IEC 61076-2-101 D (M12)					•	
<b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc			•			

Option
<b>P01</b> MP Filtri standard
<b>Pxx</b> Customized

### DESIGNATION & ORDERING CODE - DIFFERENTIAL INDICATOR PLUG

Series	Configuration example	
<b>T2</b> Indicator plug	T2	H


Seals
<b>H</b> HNBR
<b>V</b> FPM





# Accessories

## STEEL EXTENSION TUBE

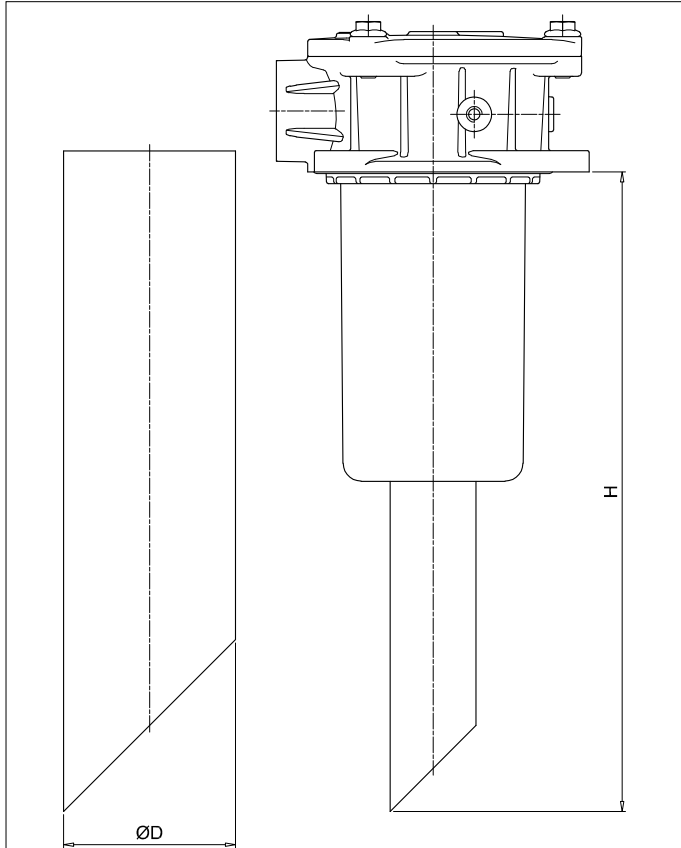

Configuration example:


MPF191 2 A F1 A10 H B S60

Length	H [mm]
S30	300
S35	350
S40	400
S45	450
S50	500
S60	650
S70	700
S80	800
S90	900

COMPATIBILITY TABLE

Filter series	Filter size				Filter length	$\varnothing D$ [mm]	
	191	192	194	52		65	
MPF	400	410	450	451	2	•	
					1	•	
	750	1	2		•		
			3		•		

## NYLON EXTENSION TUBE

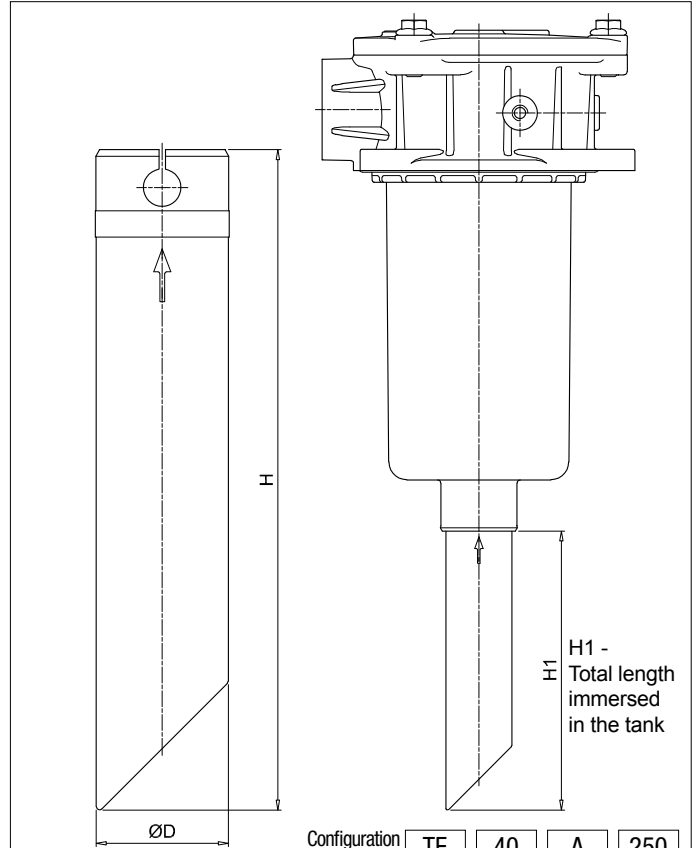

Configuration example:

TE 40 A 250

Series

**TE**

 Size  $\varnothing D$  [mm]

**25** 25

**32** 32

**40** 40

Material

**A** Nylon

Length

**200** 200

**250** 250

**300** 300

**350** 350

**400** 400

**450** 450

**500** 500

H [mm]

**200** 200

**250** 250

**300** 300

**350** 350

**400** 400

**450** 450

**500** 500

H1 [mm]

**174** 174

**224** 224

**274** 274

**324** 324

**374** 374

**424** 424

**474** 474

COMPATIBILITY TABLE

Filter series	Filter size			Filter length	TE25	TE32	TE40		
MPF - MPFX	30			1	•				
MPF	100	104	110	2		•			
				3			•		
				4					
				1					
MPFX	100	104	110	2			•		
				3					
				4					
				1					
MPF - MPFX	181	182	184	2			•		
MPT - MPTX	025		027		1				
	MPT	101	104	110	114	120	2	•	
							3		
MPTX	101	104	110	114	120	1			
						2			
						3			
						4			


## FILLER PLUG

### Materials

- Body: Nylon
- Seal: NBR

### Technical data

Tightening torque:  
15 N·m

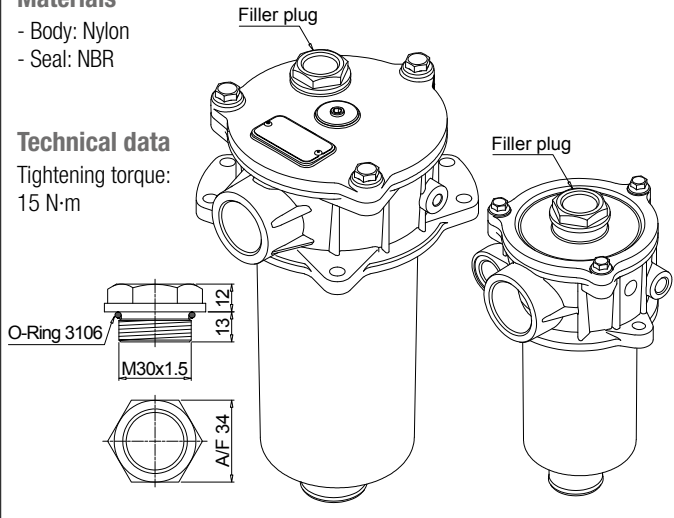

## DIFFUSER WITH FAST LOCK CONNECTION

Configuration example: **DFS** **32** **A** **250**

Series	Size	Version	Length
<b>DFS</b>			
	<b>32</b>		
	<b>40</b>		
		<b>A</b>	
			<b>075</b>

COMPATIBILITY TABLE								
Filter series	Filter size			Filter length	DFS32	DFS40		
MPF	100	104	110	1	•			
				2				
				3				
				4		•		
MPFX	100	104	110	1				
				2		•		
				3		•		
				4		•		
MPT	101	104	110	114	120	1	•	
						2		
						3		
						4		•
MPTX	101	104	110	114	120	1		
						2		•
						3		•
						4		•


## DIPSTICK

### Materials

- Screw: phosphatized steel
- Stick: phosphatized steel
- Handle: Nylon

### Technical data

Working temperature:  
From -25 °C to +110 °C

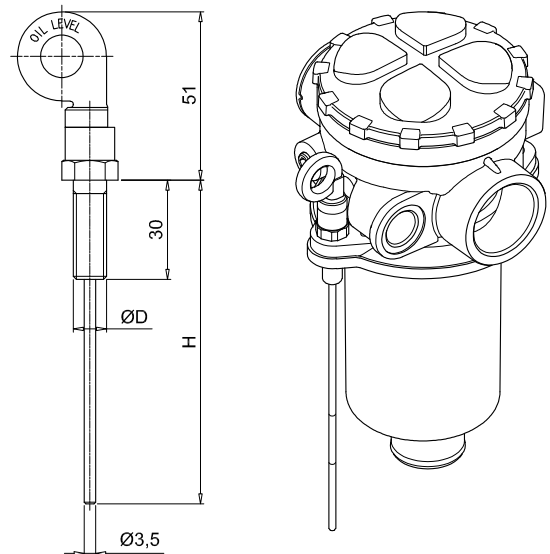

Configuration example:

**DPT** **20** **M10** **A** **P01**

### Series

**DPT**

### Length H [mm]

<b>15</b>	134
<b>20</b>	184
<b>25</b>	234
<b>30</b>	284
<b>35</b>	334

### Fastening

**M8** Fastening with screws  $\varnothing D = M8$

**M10** Fastening with screws  $\varnothing D = M10$

### Seals

**A** NBR

**V** FPM

### Execution

**P01** MP Filtri standard

**Pxx** Customized

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

These devices trip when the clogging of the filter element causes an increase in pressure drop across the filter element.

The indicator is set to alarm before the element becomes fully clogged.

MP Filtri can supply indicators of the following designs:

- **Vacuum switches and gauges**
- **Pressure switches and gauges**
- **Differential pressure indicators**

These type of devices can be provided with a visual, electrical or both signals.

# Clogging Indicators





# Clogging indicators



# CLOGGING INDICATORS

## Suitable indicator types




### VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.

They measure the pressure downstream of the filter element.

Standard items are produced with R 1/4" EN 10226 connection.

Available products with R 1/8" EN 10226 to be fitted on MPS series.

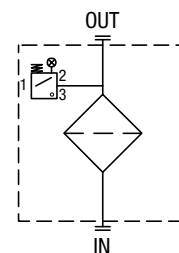
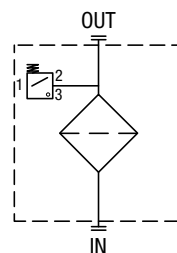
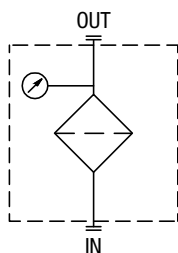


### BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.

They measure the pressure upstream of the filter element.

Standard items are produced with R 1/8" EN 10226 connection.

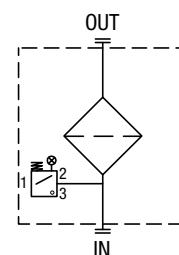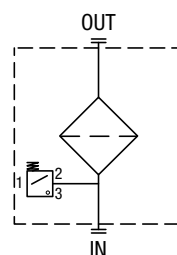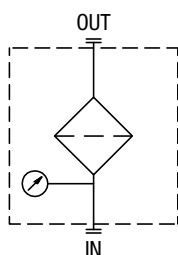





### DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element.

They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models.

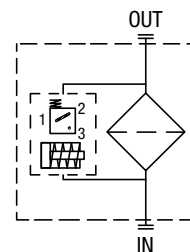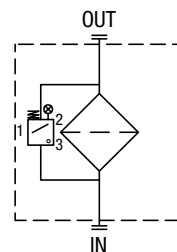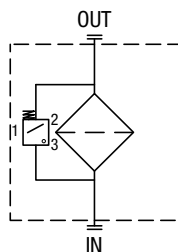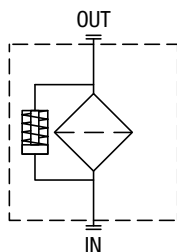



Filter family	Filter series	Visual indicator	Electrical indicator	Electrical / Visual indicator	Electronic indicator
<b>SUCTION FILTERS</b>	SF2 250 - 350 SF2 500 - 501 - 503 - 504 - 505 SF2 510 - 535 - 540	VVA16P01 VVR16P01	VEA21AA50P01	VLA21AA51P01 VLA21AA52P01 VLA21AA53P01 VLA21AA71P01	
<b>RETURN FILTERS</b>	MPFX-MPTX-MPF-MPT with bypass 1.75 bar MPH with bypass 1.75 bar	BVA14P01 BVR14P01 BVP20HP01 BVQ20HP01	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01	
	MPFX-MPTX-MPF-MPT with bypass 3 bar MPH with bypass 2.5 bar FRI 255	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA20HA50P01 BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01	
	FRI 025 - 040 - 100 - 250 - 630 - 850	DVA20xP01 DVM20xP01	DEA20xA50P01 DEM20xAxxP01	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01	DTA20xF70P01
<b>RETURN / SUCTION FILTERS</b>	Suction line MRSX 116 - 165 - 166	WB16P01 VVS16P01	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01	
	Return line MRSX 116 - 165 - 166 LMP 124	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA25HA50P01 BEM25HA41P01 BET25HF10P01 BET25HF30P01 BET25HF50P01	BLA25HA51P01 BLA25HA52P01 BLA25HA53P01 BLA25HA71P01	
<b>SPIN-ON FILTERS</b>	Suction line MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	WB16P01 VVS16P01	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01	
	Return line MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350 MST 050 - 070 - 100 - 150	BVA14P01 BVR14P01 BVP20HP01 BVQ20HP01	BEA15HA50P01 BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01	
	In-line MPS 051 - 071 - 101 - 151 MPS 301 - 351 MSH 050 - 070 - 100 - 150	DVA12xP01 DVM12xP01	DEA12xA50P01 DEM12xAxxP01	DLA12xA51P01 DLA12xA52P01 DLA12xA71P01 DLE12xA50P01 DLE12xF50P01	
<b>LOW &amp; MEDIUM PRESSURE FILTERS</b>	With bypass valve LMP 110 - 112 - 116 - 118 - 119 LMP 120 - 122 - 123 LMP 210 - 211 - LDP LMP 400 - 401 - 430 - 431 LMP 902 - 903 - 952 - 953 - 954 LMD 211 - 400 - 401 - 431 - 951 - LDD	DVA20xP01 DVM20xP01	DEA20xA50P01 DEM20xAxxP01	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01	DTA20xF70P01
	Without bypass valve LMP 110 - 112 - 116 - 118 - 119 LMP 120 - 122 - 123 LMP 210 - 211 - LDP LMP 400 - 401 - 430 - 431 LMP 902 - 903 - 952 - 953 - 954 LMD 211 - 400 - 401 - 431 - 951 - LDD	DVA50xP01 DVM50xP01	DEA50xA50P01 DEM50xAxxP01	DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01	DTA50xF70P01
<b>HIGH PRESSURE FILTERS</b>	With bypass valve FMP 039 - 065 - 135 - 320 FHP 010 - 011 - 065 - 135 - 320 - 500 FMM 050 - FHA 051 FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500 FHB 050 - 135 - 320 FHF 325 FHD 021 - 051 - 326 - 333	DVA50xP01 DVM50xP01	DEA50xA50P01 DEM50xAxxP01	DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01	DTA50xF70P01
	Without bypass valve FMP 039 - 065 - 135 - 320 FHP 010 - 011 - 065 - 135 - 320 - 500 FMM 050 - FHA 051 FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500 FHB 050 - 135 - 320 FHF 325 FHD 021 - 051 - 326 - 333	DVA70xP01 DVM70xP01	DEA70xA50P01 DEM70xAxxP01	DLA70xA51P01 DLA70xA52P01 DLA70xA71P01 DLE70xA50P01 DLE70xF50P01	DTA70xF70P01
<b>STAINLESS STEEL HIGH PRESSURE FILTERS</b>	With bypass valve FZH 010 - 011 - 039 FZP 039 - 136 FZX 011 FZB 039 FZM 039 FZD 051	DVX50xP01 DVY50xP01	DEX50xA50P01	DLX50xA51P01 DLX50xA52P01	
	Without bypass valve FZH 010 - 011 - 039 FZP 039 - 136 FZB 039 FZM 039 FZD 010 - 021 - 051	DVX70xP01 DVY70xP01	DEX70xA50P01	DLX70xA51P01 DLX70xA52P01	

All data, details and words contained in this publication are provided for information purposes only.  
MP Filters reserves the right to make modifications to the models and versions of the described products at any time  
for both technical and / or commercial reasons.  
The colors and the pictures of the products are purely indicative.  
Any reproduction, partial or total, of this document is strictly forbidden.  
All rights are strictly reserved.

Rev. 10-2017



The mark of  
responsible forestry





## WORLDWIDE NETWORK

### HEADQUARTERS

**MP Filtri S.p.A.**  
Via 1° Maggio, 3  
20060 Pessano con Bornago  
Milano - Italy

### BRANCH OFFICES

**MP Filtri U.K. Ltd.**  
Bourton Industrial Park  
Bourton on the Water  
GL54-2HQ Gloucestershire

**MP Filtri Canada Inc.**  
8831 Keele Street  
Concord, Ontario  
L4K 2N1 - Canada

**MP Filtri Germany GmbH**  
Hans-Wilhelmi-Straße  
DE-66386 St. Ingbert

**ITALFILTRI LLC**  
**Russian Federation**  
Yurievsky Pereulok 13 a, Building 1  
111020 Moscow - Russia

**MP Filtri France SAS**  
Parc d'activités des Chanteraines  
8 rue du Commandant d'Estienne d'Orves  
Immeuble D3  
92390 Villeneuve la Garenne

**MP Filtri (Shanghai) Co., Ltd.**  
1280 Lianxi Road, Bld 8 - 2nd Floor  
Shanghai - Pudong  
201204 China

**MP Filtri U.S.A. Inc.**  
2055 Quaker Pointe  
PA 18951 Drive Quakertown

**MP Filtri India Pvt. Ltd.**  
Plot-7F, Raj Pinnacle,  
Beside RMZ Centennial  
Brookefield Road, Whitefield  
560048 Bangalore

**PASSION TO PERFORM**



[mpfiltri.com](http://mpfiltri.com)